



Technology that saves lives

Key-operated Fire Alarm Station

RMS-1T-KO



Overview

The RMS-1T-KO Key-operated Fire Alarm Station is ideal for use in buildings such as penal institutions or special needs housing, or anywhere an ordinary pull station would be operated for reasons other than its intended purpose. The RMS-1T-KO station is fitted with a key-operated switch of which the key is not easily duplicated.

The RMS-1T-KO has one Single Pole Normally Open contact rated for 10 amps at 125 Vdc. It features terminal connectors for easy field wiring. The key can be removed in both the "ON" and "OFF" positions.

The RMS-1T-KO Station flush mounts to any standard North American 1-gang electrical box 2-1/2 inch (63mm) deep minimum, or surface mounts to Kidde Cat. Number 46292- 0200 Surface Mount Backbox. These backboxes are factory finished with a durable "Fire Red" baked enamel.

Standard Features

- Tamperproof actuation
- Single-stage operation
- Single-pole N.O. contact
- Terminal connectors
- One-gang flush mounting
- Surface mount box available



Technology that saves lives

Contact us...

Email: kidde.fire@fs.utc.com


Web: Kidde.com/EngineeredSystems

Kidde is a UTC brand.
1016 Corporate Park Drive
Mebane, NC 27302

© 2016 United Technologies Corporation.
All rights reserved.

Installation

Kidde recommends that these Key-operated Fire Alarm Stations always be installed in accordance with the latest recognized editions of local and national fire alarm codes.

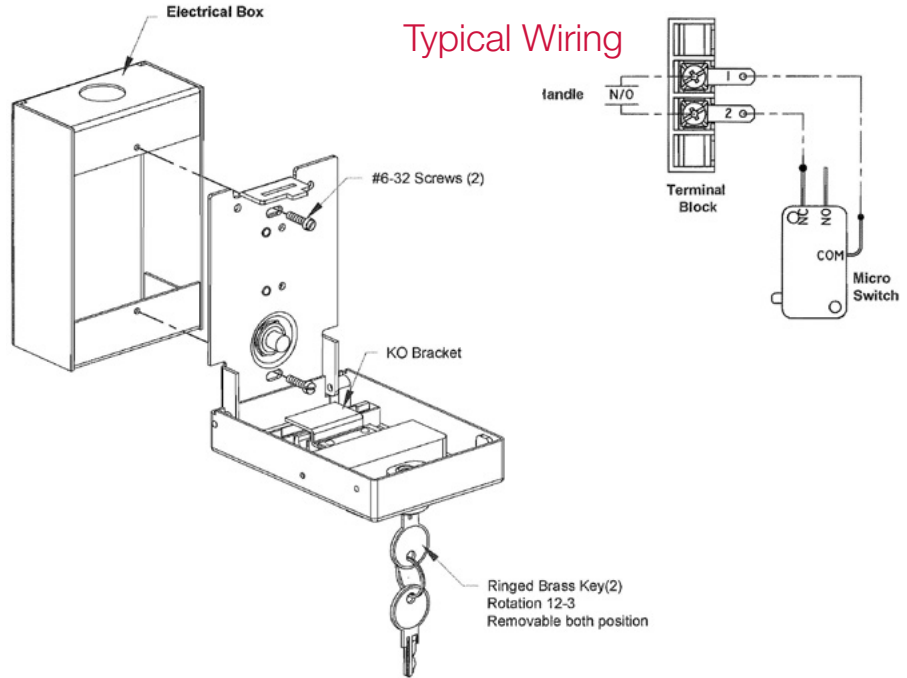

Specifications

Keyswitch Contacts	Single Pole Normally Open Rating: 10 amp at 125 Vdc
Wire Connection	Terminals
Mounting	Flush to: One-gang 2-1/2 inch (63mm) deep standard North-American electrical box Surface to: Cat. No. 46292-0200 Surface Box
Operating Environment	Normal Indoor

Ordering Information

Catalog Number	Description	Shipping Weight
RMS-1T-KO	Key-operated Fire Alarm Station — Normally Open	0.3 lb (0.6 lb)
46292-0200	Surface Mount Box — Fire Red Finish	0.8 lb (0.35 lb)