

# AL1012X220 Series

## Power Supply/Chargers

Altronix AL1012X220 series power supply/chargers convert a 220VAC (working range 198VAC-256VAC), 50/60Hz input into a single fused, four (4), eight (8) or sixteen (16) fuse or PTC protected outputs. Outputs are 12VDC with a total of 10A max.



AL1012XPD8220

### Key Features

- Available with 1, 4, 8 or 16 outputs
- Fused or PTC protected outputs
- Supervision
  - AC Fail
  - Battery Fail and Battery Presence
- Built-in charger for sealed lead acid or gel type batteries
- Instantaneous transfer to stand-by batteries
- Short circuit and overload protection
- AC input and DC output options
- CE European Conformity
- Lifetime Warranty

### AL1012X220 Series Power Supply Configuration Reference Chart

Altronix Model Number	Total Output Rating (A)	Input Rating: 220VAC, 50/60Hz	Input Fuse Rating	Power Supply Battery Fuse Rating	Power Distribution Module(s)	Number of Output(s)	Fused Outputs Ratings	PTC Auto-Resettable Outputs Ratings
AL1012X220	10A	1.3A	5A/ 250V	15A/ 32V	-	1	10A	-
AL1012XPD4220					PD4	4	3.5A	-
AL1012XPD4CB220					PD4CB		-	2.5A
AL1012XPD8220					PD8	8	3.5A	-
AL1012XPD8CB220					PD8CB		-	2.5A
AL1012XPD16220					Two (2) PD8	16	3.5A	-
AL1012XPD16CB220					Two (2) PD8CB		-	2.5A

#### Lifetime Warranty



# AL1012X220 Series

Power Supply/Chargers

## Specifications

### Input

Voltage 220VAC (working range  
198VAC - 256VAC), 50/60Hz, 1.3A max.  
Fusing 5A/250V

### Outputs

Voltage 12VDC  
Current 10A @ 12VDC continuous max.  
Protection Fused 3.5A / PTC 2.5A  
Other Overvoltage protection  
Filtered and regulated

### Back-up Battery *(not included)*

Capacity 12AH/12VDC (1 within enclosure)  
40AH/65AH (requires separate enclosure)  
Type Sealed lead acid or gel type  
Failover Upon AC loss, instantaneous

### Supervision

AC Failure Form "C" contacts  
Battery Form "C" contacts

### Indicators (LED)

Input 220VAC is present  
DC Output Powered  
Battery Discharged or not connected

## Agency Listings

CE European Conformity

## Physical and Environmental

Enclosure:  
15.5" x 12" x 4.5" (393.7mm x 304.8mm x 114.3mm)  
Shipping:  
16.5" x 13.5" x 6" (419.1mm x 342.9mm x 152.5mm)

## Weight (approx.)

Model	Product Weight	Shipping Weight
AL1012X220	8.85 lb. (4.0 kg)	11.15 lb. (5.1 kg)
AL1012XPD4(CB)220	9.0 lb. (4.1 kg)	11.3 lb. (5.13 kg)
AL1012XPD8(CB)220	9.1 lb. (4.13 kg)	11.4 lb. (5.17 kg)
AL1012XPD16(CB)220	9.3 lb. (4.22 kg)	11.6 lb. (5.26 kg)

## Temperature

Operating: 0°C to 49°C (32°F to 120°F)  
Storage: -20°C to 70°C (-4°F to 158°F)

Relative Humidity 85% +/- 5%

BTU/Hr. (approx.): 61 BTU/Hr.

## Lifetime Warranty


# AL1012X220 Series

Power Supply/Chargers

## Dimensions and Drawing

Dimensions (H x W x D approximate)

15.5" x 12" x 4.5" (393.7mm x 304.8mm x 114.3mm)

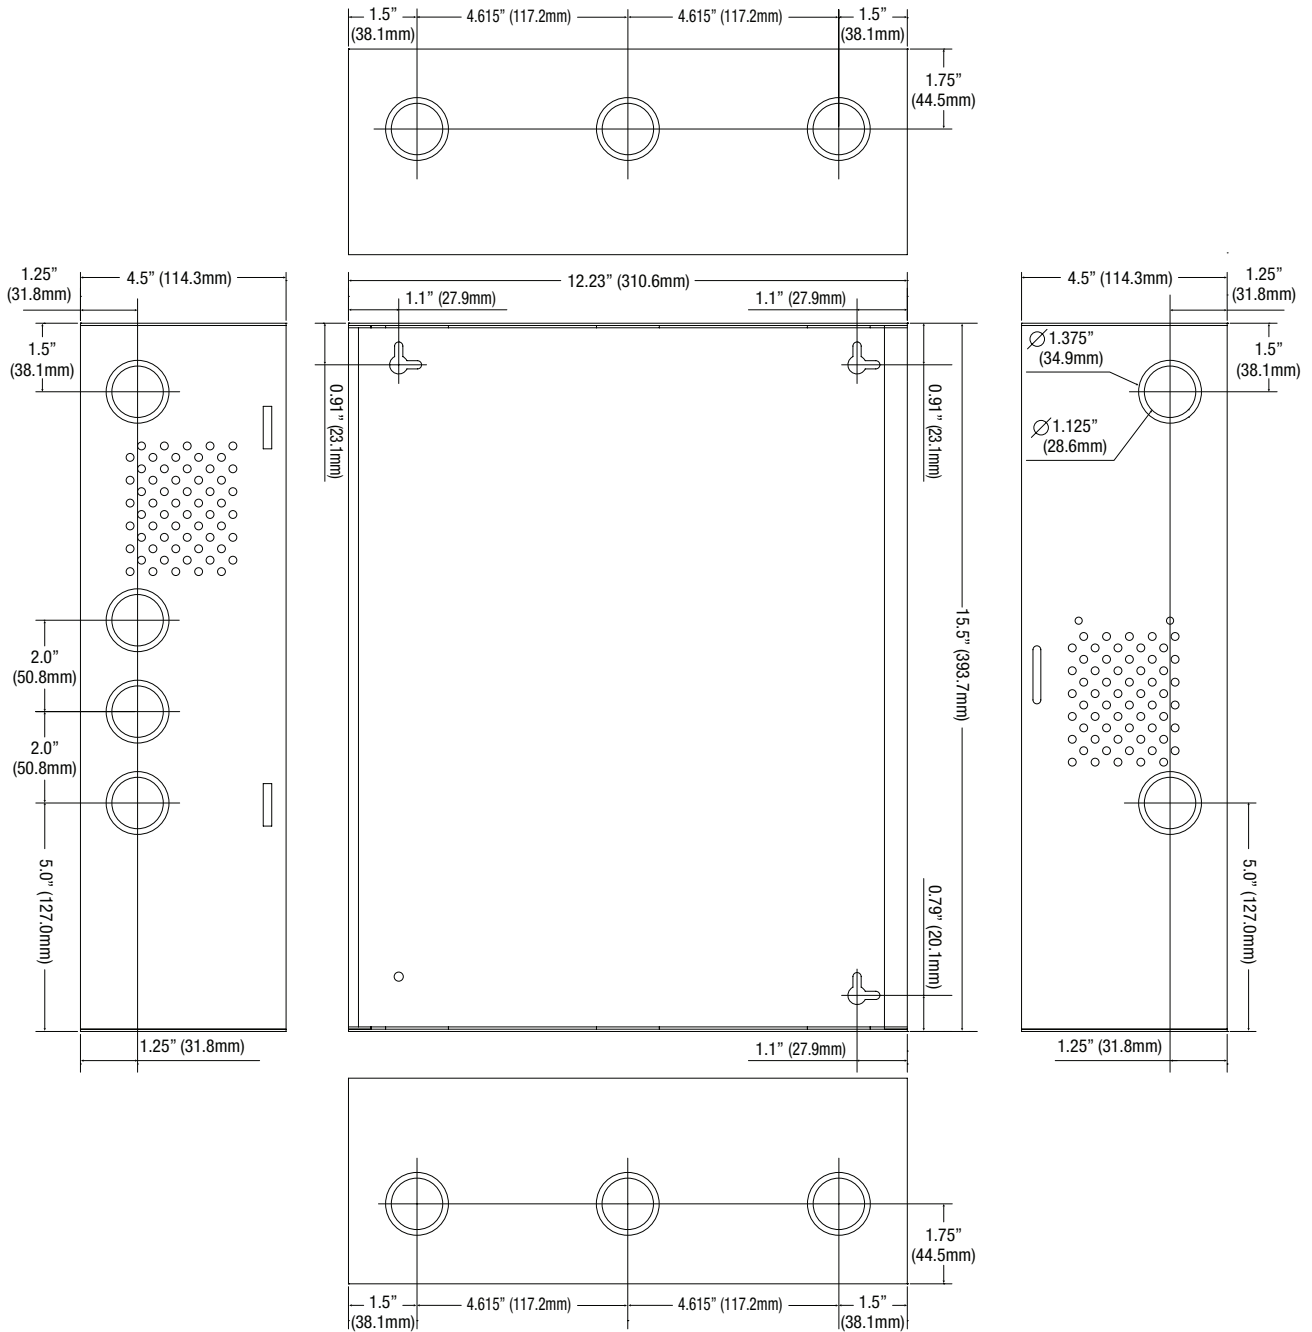

### Lifetime Warranty

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com