

# Kidde ECS Fire Suppression System Component Description




Effective: June 2014

K-90-2120 Rev BA

## Flexible Discharge Hoses

### FEATURES

- For Use with UL Listed, ULC Listed and FM Approved Systems
- See Kidde® Manual 06-236225-001 for USCG Approval
- RoHS Compliant

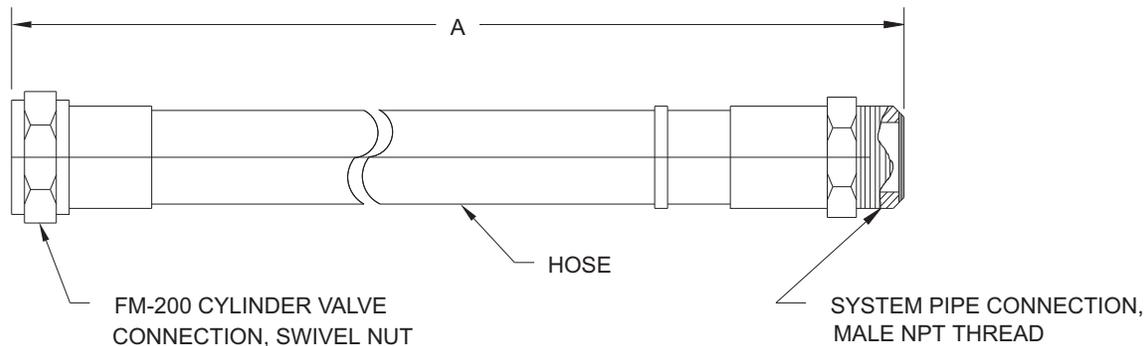

### TECHNICAL DATA

- **Minimum Bursting Pressure:** 2000 PSI
- **Working Pressure:** 500 PSI
- **Proof Pressure:** 1000 PSI

### MATERIALS

- **Hose:** Reinforced Rubber Hose
- **Fitting:** Cadmium-plated Steel

Part Number	Male NPT	A	Min. Bend Radius
WK-283898-000	1 1/2	24	10.5
WK-283899-000	2	31	13.5
WK-283900-000	2 1/2	48	22.5
06-118225-001	3	54	24

Dimensions are in inches.

### COMPATIBILITY

Series	For Use With
Kidde ECS HFC-227ea	X
Kidde ECS Advanced Delivery FM-200®	X

This literature is provided for informational purposes only. KIDDE-FENWAL, INC. assumes no responsibility for the product's suitability for a particular application. The product must be properly applied to work correctly. If you need more information on this product, or if you have a particular problem or question, contact KIDDE-FENWAL, Inc.

FM-200 is a registered trademark of E.I. du Pont de Nemours and Company. Kidde is a registered trademark of Kidde-Fenwal Inc. All other trademarks are the property of their respective owners.