

T2MK7F8Q

Access & Power Integration Solution

TROVE™

Altronix T2MK7F8Q kit consists of Trove2 enclosure and TM2 Altronix & Mercurybackplane with 24VDC @ 10A power supply/charger, Network communication module, 12VDC voltage regulator, eight (8) fuse protected output dual voltage power distribution module and eight (8) fuse protected output access control module. This kit also accommodates various combinations of Mercury* boards for up to eight (8) doors in a single enclosure. Trove simplifies board layout and wire management, reduces installation time and labor costs.

***Also compatible with these authentic Mercury partners:**

AccessNsite, Avigilon, BadgePass, BluBox, Feenics, Genetec, Identocard, IMRON, Johnson Controls, Kastle, Keri Systems, Lenel/S2, LockState, Maxxess, Midpoint Security, NLSS, Open Options, Panasonic Video Insight, Quintron, RS2, Schneider Electric, Vanderbilt



T2MK7F8Q

Key Features

- Accommodates the following Mercury controllers:
Mercury: LP1501, LP1502, LP2500, LP4502, MR16IN, MR16OUT, MR50, MR52, MR62e, MUX8
- Convenient knockout configuration:
 - One (1) single knockout 2.415" (2" Conduit)
 - Sixteen (16) double knockouts
1.362" (1" Conduit) / 1.115" (3/4" Conduit)
- 16 AWG galvanized steel backplane simplifies board layout and wire management
- Supervision
 - AC Fail
 - Low Battery and Battery Presence
 - Low power shutdown.
- Management interface for up to two (2) eFlow power supply/chargers
- Management interface software included (USB flash drive)
- Agency Listings:
 - All Altronix components of this Trove kit are UL Listed sub-assemblies. Please refer to the Sub-Assembly Installation Guides for further information
 - UL: UL294 - Access Control System
 - cUL: CAN/ULC - s319-05 - Electronic Access Control Systems
 - CE European Conformity.
- Enclosure accommodates up to four (4) 12VDC/12AH batteries
- Lifetime Warranty*

**Altronix Power Supply/Chargers and Sub-Assemblies only*

Accessories (order separately)



WM5

WM5, WM25, WM100 - Magnetic Cable Tie Mounts

Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps. These are ideal for wire management in our Trove series.



Mounting Magnet

MM4, MM8, MM12, MM24 - Magnetic Mounting Solution

Altronix mounting magnets accommodate screws and nylon standoffs to allow for mounting various boards/ accessories in any metal enclosure or backplane.

Specifications

Power Supply (eFlow104NB):

Input

Voltage	120VAC, 60Hz, 4.5A max.
Input Fuse	6.3A/250V.

Outputs

Voltage	24VDC @ 10A.
Auxiliary	1A (unswitched).
Protection	Overvoltage protection. Filtered and regulated.

Battery Backup

Type	Sealed lead acid or gel type.
Fuse Rating	10A @ 32VDC.
Falover	Upon AC loss, instantaneous.

Fire Alarm Disconnect

Supervised	Latching or non-latching.
EOL	10K Resistor.

Supervision

AC Failure	Form "C" contacts.
Battery	Form "C" contacts.

Low DC Power Shutdown

Shuts down DC output terminals if battery voltage drops below 70-75% for 24V units (depending on the power supply).
Prevents deep battery discharge.

Indicators (LED)

AC Input	120VAC is present.
DC Output	Powered.
Battery	Discharged or not connected.

Network Communication Module (LINQ2):

Status Monitoring

AC status; Output current draw; Unit's temperature;
DC output voltage; Low Battery/Battery presence detection.
Input trigger state change; Output (relay and power supply) state change.

Programming

Battery service date indication.
Programmable via USB or web browser.
Automated timed events:
- Control output relays and power supply via flexible timing parameter.

Reporting

Programmable dashboard notifications.
E-mail notification selectable by event.
Event log tracks history (100+ events).

Indicators (LED)

Blue LED:	Power ON.
-----------	-----------

Voltage Regulator (VR6):

Input

Voltage	24VDC from eFlow104NB.
---------	------------------------

Output

Voltage	12VDC.
Current	6A continuous.
Other	Surge suppression.

Indicators (LED)

Input	24VDC is present.
Output	Powered.

Dual Input Power Distribution Module (PDS8):

Input

Voltage	12VDC from VR6 and 24VDC from eFlow104NB.
Input Fuse	10A/32V.

Outputs

Voltage 12VDC and/or 24VDC.
Any of the eight (8) power outputs are selectable to follow power Input 1 or Input 2.
Individual outputs may be set to OFF position for servicing.

Outputs Ratings

Fuses	3A/32V.
-------	---------

Indicators (LED)

DC Output	Eight (8) individual output LEDs.
Green:	12VDC
Red:	24VDC.

Access Power Controller (ACM8):

Input

Voltage	24VDC from eFlow104NB.
Input Fuse	10A/250V.

Outputs

Voltage 24VDC.
Eight (8) 24VDC independently controlled fused outputs:
a) Fail-Safe and/or Fail-Secure power outputs.
Form "C" Relays rated 28VAC or VDC @ 2.5A.
b) Auxiliary power outputs (unswitched).
c) Any combination of the above.

Output Fuses	3.5A/250V.
--------------	------------

Indicators (LED)

Red LEDs	Outputs are triggered (relays energized).
Green LED	FACP disconnect is triggered.

T2MK7F8Q Kit:

Agency Listings

All components of this Trove kit are UL Listed sub-assemblies.
Please refer to the corresponding Sub-Assembly Installation Guides for further information.

CE	European Conformity.
----	----------------------

Physical and Environmental:

Dimensions (H x W x D)

27.25" x 21.5" x 6.5" (692.2mm x 546.1mm x 165.1mm).

Weight (approx.)

Product	40.0 lb. (18.15 kg).
Shipping	43.75 lb. (19.85 kg).

Temperature

Operating	0°C to 49°C (32°F to 120°F).
Storage	-20°C to 70°C (-4°F to 158°F).

Relative Humidity	85% +/-5%.
-------------------	------------

BTU/Hr. (approx.):	87 BTU/Hr.
--------------------	------------

Access Controller Position Chart for the Following Models:


Mercury	Pem Mounting
LP2500, MUX8	(A)
LP1502, LP4502, MR52, MR16IN, MR16OUT	(B)
LP1501, MR62e	(C)
MR50	(D)



Dimensions and Drawing

Dimensions (H x W x D approximate)

27.25" x 21.5" x 6.5" (692.2mm x 546.1mm x 165.1mm)

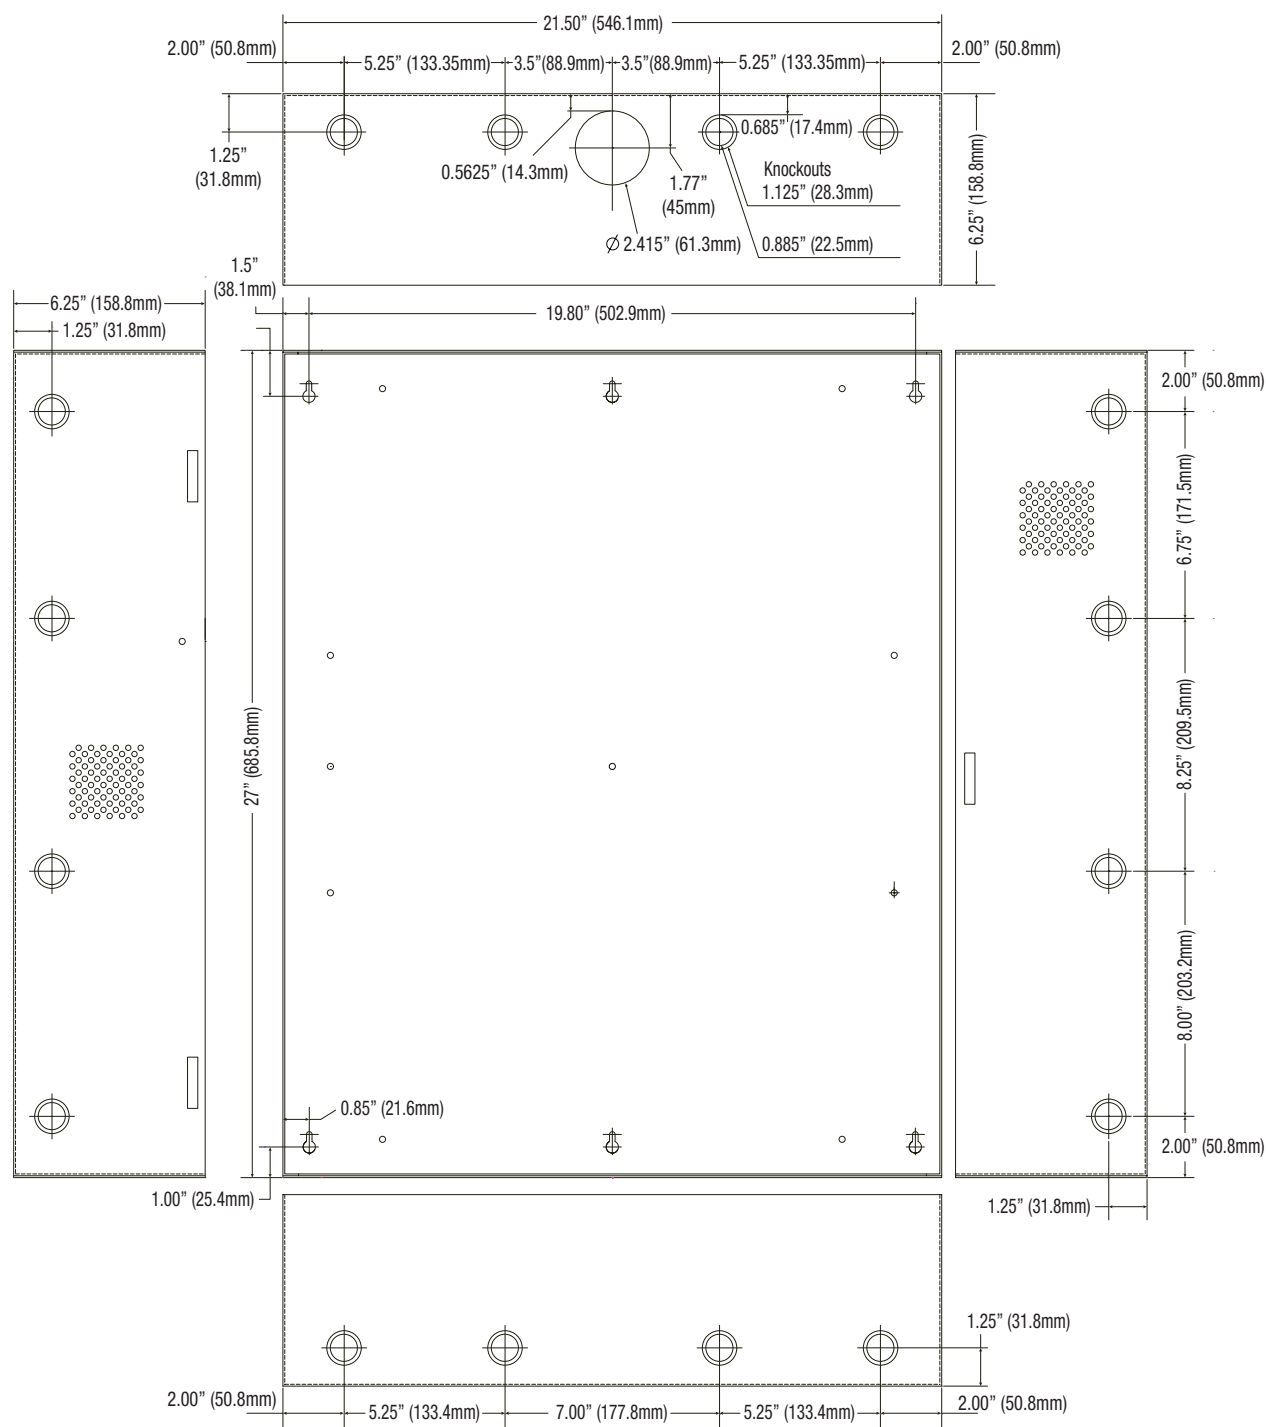

Lifetime Warranty

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com