



Model 5865-3 and 5865-4 LED Fire Annunciators



IntelliKnight's LED Fire Annunciator modules provide cost effective remote annunciation.

The 5865-3 and 5865-4 LED annunciators provide the most cost effective and convenient means of remote annunciation. You can use up to eight 5865 series annunciators on one IntelliKnight Control Panel.

5865 series annunciators provide you with 30 programmable LEDs (15 red, 15 yellow) for maximum flexibility. The 5865-3 fits into a standard 3-gang electrical box and the 5865-4 fits into a standard 4-gang electrical box. The annunciators are covered by semi-transparent labels and an eye-pleasing cover plate.


The 5865-3 provides alarm and trouble annunciation for 15 zones while the 5865-4 adds reset and silence input switches for even more versatility.

Model 5865-3 and 5865-4 Fire Annunciators


The 5865 series annunciators provide a visual indication of the current state of the zone inputs on the IntelliKnight Control Panel.

Up to 8 Model 5865s can be used on the IntelliKnight's SBUS. The addresses are DIP switch programmable with addresses ranging from 1 to 31.

Each 5865 Fire Annunciator has a total of 30 programmable LED outputs—15 red and 15 yellow—to indicate the operational status of input zones which are connected to the IntelliKnight panel. In addition the 5865s come with a piezo sounder which give an audio indication during alarms, troubles and supervisory troubles. Typically the red LEDs are used for alarms and the yellow LEDs are used for troubles, however the outputs are not predefined which allows you maximum flexibility.

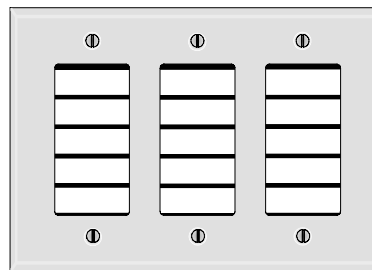

5865-3

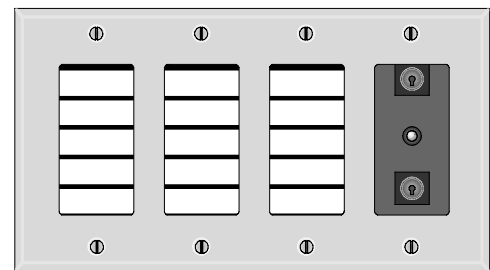

5865-4

Features

- 30 programmable LED outputs (15 red and 15 yellow)
- Up to 8—5865s can be used on one IntelliKnight panel
- Fit into a standard 3- or 4-gang electrical box
- Comes with four semi-transparent labels that can be typed or printed on
- DIP switch addressable
- Connects to IntelliKnight SBUS.
- Both modules UL 864 listed; comply with NFPA 72
- 4-wire supervised connection to IntelliKnight SBUS
- MEA Approved 429-92-E, Vol 9
- CSFM
- FM Approved

Specifications

Operating Voltage 24 VDC

Standby Current: 35 mA

Alarm Current: 145 mA

Ambient Temperature 32°F to 120°F
(0°C to 49°C)

Mounting 5865-3
3-gang electrical box
5865-4
4-gang electrical box




**SILENT
KNIGHT**

Model 5865-3 and 5865-4 LED Fire Annunciators



Engineering Specifications

The contractor shall furnish and install where indicated on the plans, remote LED annunciator model 5865. A model 5865-3 shall be used for annunciation and a model 5865-4 shall be used for annunciation and reset/silence operation. The annunciators shall provide indications for up to 15 alarm and 15 trouble conditions. The annunciators shall fit inside standard electrical trade boxes, the 5865-3 fits a 3 gang box and a 5865-4 fits a 4 gang box. Boxes shall be a minimum of 2 inches deep. The annunciator shall be UL listed and compatible with the Silent Knight's IntelliKnight fire alarm control panel.

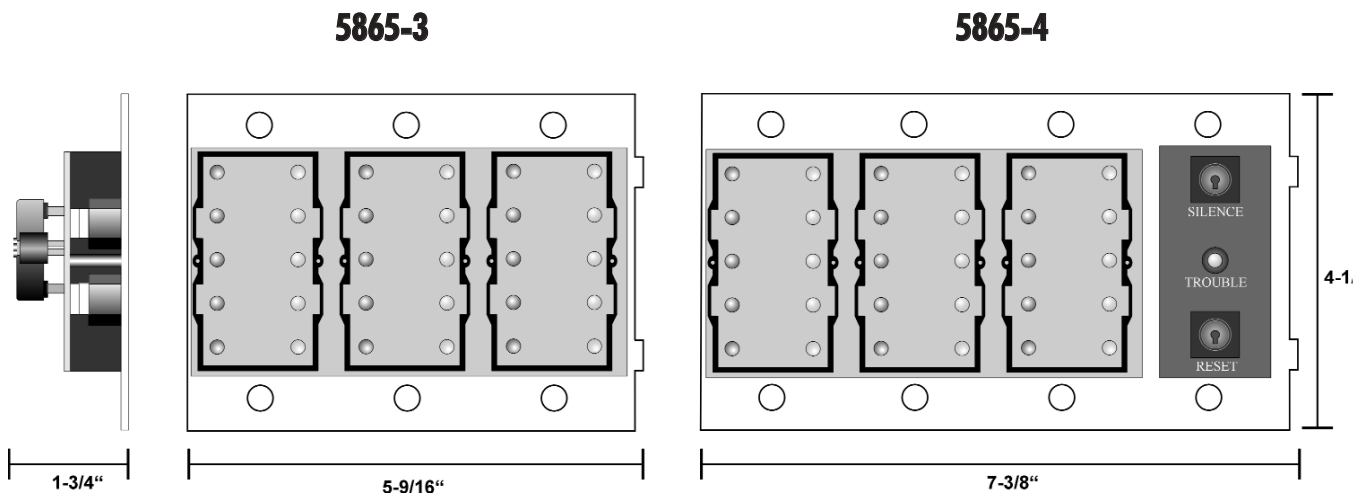

**SILENT
KNIGHT**

7550 Meridian Circle, Maple Grove, MN 55369-4927

800-446-6444 or in Minnesota 763-493-6435

FAX: 763-493-6475

World Wide Web: <http://www.silentknight.com>

MADE IN AMERICA

FORM# 350214, Rev. 11/01

Copyright © 2001 Silent Knight Security Systems

IntelliKnight is a Registered Trademark of Silent Knight