


#### Description

Altronix T2MK3F8Q2 kit consists of Trove2 enclosure and TM2 Mercury/Altronix backplane with 12VDC or 24VDC (factory set at 24VDC) @ 6A power supply/charger, Network communication module, and eight (8) fuse protected output access control module. This kit also accommodates various combinations of Mercury/Lenel\* boards for up to eight (8) doors in a single enclosure. Trove simplifies board layout and wire management, reduces installation time and labor costs.

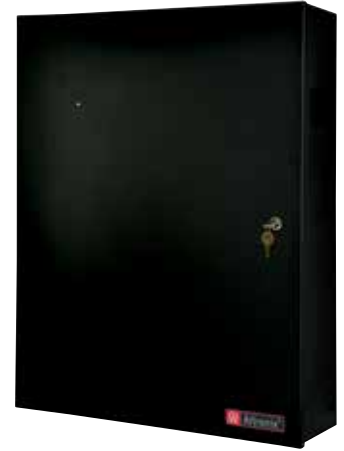

T2MK3F8Q2

**\*Also compatible with these authentic Mercury partners:**

AccessNsite, Avigilon, BadgePass, BluBox, Feenics, Genetec, Identocard, IMRON, Johnson Controls, Kastle, Keri Systems, LockState, Maxxess, Midpoint Security, NLSS, Open Options, Panasonic Video Insight, Quintron, RS2, S2 Security, Schneider Electric, Vanderbilt

#### Key Features

- Accommodates the following Mercury controllers: EP1502, LP1502, MR52, MR16IN, MR16OUT, EP1501, LP1501, MR51e, MR62e, MR50, EP2500, LP2500, MUX8.
- Convenient knockout configuration:
  - Single 2" diameter knockout located top center of enclosure
  - Sixteen (16) double knockouts (1" and 0.75").
- 16 AWG galvanized steel backplane simplifies board layout and wire management.
- Filtered and electronically regulated outputs.
- Thermal and short circuit protection with auto reset.
- AC input and DC output LED indicators.
- Built-in charger for sealed lead acid or gel type batteries.
- Instantaneous transfer to stand-by batteries.
- Supervision
  - AC Fail
  - Low Battery and Battery Presence
  - Low power shutdown.
- Management interface for up to two (2) eFlow power supply/chargers.
- Management interface software included (USB flash drive)
- CE European Conformity.
- Enclosure accommodates up to four (4) 12VDC/12AH batteries.
- Lifetime Warranty\*/Made in the U.S.A.

*\*Altronix Power Supply/Chargers and Sub-Assemblies only*

#### Accessories (order separately)



WM5

#### WM5, WM25, WM100 - Magnetic Cable Tie Mounts

Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps. These are ideal for wire management in our Trove series.



Mounting Magnet

#### MM4, MM8, MM12, MM24 - Magnetic Mounting Solution

Altronix mounting magnets accommodate screws and nylon standoffs to allow for mounting various boards/ accessories in any metal enclosure or backplane.

# T2MK3F8Q2

## Access & Power Integration Solution

### Specifications

#### Power Supply (eFlow6NB):

##### Input

Voltage	120VAC, 60Hz.
Input Fuse	5A/250V.

##### Output

Voltage	24VDC.
Current	6A continuous.
Other	Overvoltage protection. Filtered and regulated.

#### Battery Backup

Capacity	7AH/12VDC (Up to 2 within enclosure). 40 AH/65 AH (requires separate enclosure).
Type	Sealed lead acid or gel type.
Fuse Rating	10A/32V.
Failover	Upon AC loss, instantaneous.

#### Supervision

AC Failure	Form "C" contacts.
Battery	Form "C" contacts.

#### Low DC Power Shutdown

Shuts down DC output terminals if battery voltage drops below 70-75% for 24V units (depending on the power supply).  
Prevents deep battery discharge.

#### Indicators (LED)

Input	120VAC is present.
DC Output	Powered.
Battery	Discharged or not connected.

#### Network Communication Module (LINQ2):

##### Status Monitoring

AC status; Output current draw; Unit's temperature;  
DC output voltage; Low Battery/Battery presence detection.  
Input trigger state change; Output (relay and power supply) state change.

##### Programming

Battery service date indication.  
Programmable via USB or web browser.  
Automated timed events:  
- Control output relays and power supply via flexible timing parameter.

##### Reporting

Programmable dashboard notifications.  
E-mail notification selectable by event.  
Event log tracks history (100+ events).

#### Indicators (LED)

Blue LED:	Power ON.
-----------	-----------

#### Access Power Controller (ACM8):

##### Input

Voltage	24VDC from eFlow6NB.
Input Fuse	10A/250V.

##### Outputs

Voltage	24VDC.
Eight (8) 24VDC independently controlled fused outputs:	
a) Fail-Safe and/or Fail-Secure power outputs.	Form "C" Relays rated 28VAC or VDC @ 2.5A.
b) Auxiliary power outputs (unswitched).	
c) Any combination of the above.	
Output Fuses	3.5A/250V.

#### Indicators (LED)

Red LEDs	Outputs are triggered (relays energized).
Green LED	FACP disconnect is triggered.

#### T2MK3F8Q2 Kit:

##### Agency Listings

All components of this Trove kit are UL Listed sub-assemblies.  
Please refer to the corresponding Sub-Assembly Installation Guides for further information.

CE	European Conformity.
----	----------------------

##### Physical and Environmental:

Dimensions (H x W x D)  
27.25" x 21.5" x 6.5" (692.2mm x 546.1mm x 165.1mm).

##### Weight (approx.)

Product	40.0 lb. (18.15 kg).
Shipping	43.75 lb. (19.85 kg).

##### Temperature

Operating	0°C to 49°C (32°F to 120°F).
Storage	-20°C to 70°C (-4°F to 158°F).

Relative Humidity 85% +/-5%.

BTU/Hr. (approx.): 87 BTU/Hr.