



## 108 TWO HOLE STRAP FOR CPVC PIPE



### CERTIFICATIONS



### FEATURES

Includes flared edges to protect piping

Rated for use with CPVC fire sprinkler pipe

Includes mounting screws


### SPECIFICATIONS

**Finish:** Pregalvanized

**Material:** Steel

Catalog Number	Pipe Size	Outer Diameter(OD)	Hole Size(HS)	A	B	C	Hanger Spacing
1080075EG	3/4"	1.050"	7/32"	3 1/4"	2 1/4"	1 3/16"	6' Max
1080100EG	1"	1.315"	7/32"	3 1/2"	2 1/2"	1 3/16"	6' Max
1080125EG	1 1/4"	1.660"	7/32"	4 1/4"	3 1/4"	1 3/16"	6' Max
1080150EG	1 1/2"	1.900"	7/32"	4 7/16"	3 7/16"	1 3/16"	7' Max
1080200EG	2"	2 3/8"	7/32"	4 15/16"	3 15/16"	1 3/16"	8' Max

## DIAGRAMS

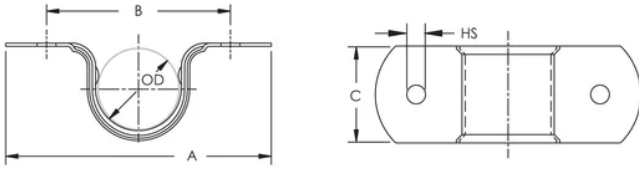

## WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at [www.nvent.com](http://www.nvent.com) and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

### North America

+1.800.753.9221

Option 1 – Customer Care

Option 2 – Technical Support

### Europe

Netherlands:

+31 800-0200135

France:

+33 800 901 793

### Europe

Germany:

800 1890272

Other Countries:

+31 13 5835404

### APAC

Shanghai:

+ 86 21 2412 1618/19

Sydney:

+61 2 9751 8500



Our powerful portfolio of brands:  
nVent.com **CADDY ERICO HOFFMAN RAYCHEM SCHROFF**  
**TRACER**