

Features

Multi-line expanded content display interface for Simplex® 4100ES Series fire alarm control panels, available with the following products:

- Fire alarm control panels (stand-alone or networked)
- Network Display Units (NDU) with support for up to 12,000 points
- Remote InfoAlarm Command Centers mounted in a dedicated cabinet (4100ES control panels support Remote InfoAlarm Command Centers independent of host panel display type)
- Models include an Enhanced Power Supply (EPS) and battery charger (9 A total) with on-board: **IDNAC** SLCs (signaling line circuit) for addressable appliance control, an electrically isolated **IDNet 2** addressable device control module with dual short circuit isolating output loops; and programmable function auxiliary output
- For additional information concerning EPS power supplies and their enhanced features, refer to 4100ES data sheet S4100-0100
- For additional 4100ES related applications, including models with power supplies for conventional non-addressable NACS, refer to data sheet S4100-0045

InfoAlarm Command Centers provide customized operating convenience:


- “Activity in System” primary display choices include: First and Most Recent, First 5 and Most Recent, First 8, Site Plan with activity status icons, General Alarm, or Direct to List; selectable individually by event type
- System reports are easily viewed; logs can be read with minimal scrolling required
- Up to six “softkeys” per screen provide functions that vary with the particular screen information aiding operators to determine how to proceed
- Up to two languages are available per system, easily selected by programmable key press (systems with IMS/GCC/NPU or 2 x 40 LCD panels or annunciators require one language to be the default font)
- International models allow customized language legends for operator keys and status LEDs
- Information sent to Remote InfoAlarm Command Centers can be vectored by point

Display properties:

- 320 x 240 dot matrix (QVGA) display provides an active area of 4.53” W x 3.4” H (115 mm x 86 mm) displaying up to 854 characters using standard ASCII character font
- Bright white LED backlighting provides efficient and long lasting illumination; operation is selectable as continuous or off with power fail or with no key presses

UL listed to Standard 864

* This product has been approved by the California State Fire Marshal (CSFM) pursuant to Section 13144.1 of the California Health and Safety Code. See CSFM Listing 7165-0026:0251 for allowable values and/or conditions concerning material presented in this document. It is subject to re-examination, revision, and possible cancellation. NYC Fire Dept COA #6151. Additional listings may be applicable; contact your local Simplex product supplier for the latest status. Listings and approvals under Simplex Time Recorder Co. are the property of Tyco Fire Protection Products.

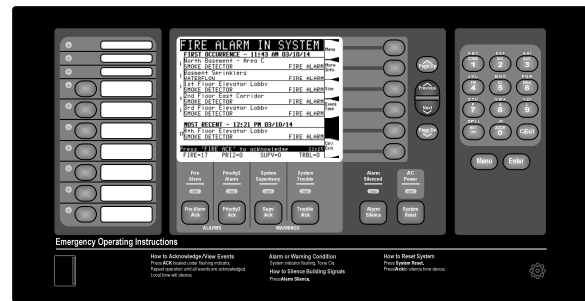

InfoAlarm Command Center for Control Panel Mounting



InfoAlarm Command Center in Remote Cabinet

Introduction

Displaying more information. 4100ES Controls using the InfoAlarm Command Center provide an expanded content, multi-line LCD interface that requires minimal key presses to access detailed information. Because it is system-powered, its detailed information is provided without requiring separate supplementary equipment.

InfoAlarm Command Center Control Panel. By using a larger area format instead of an individual text line display, the LCD provides text information for Alarm, Supervisory, or Trouble. The format is flexible and able to be customized per application allowing additional information to be presented to suit the specific application.

Description

InfoAlarm Command Centers for 4100ES fire alarm systems provide a large display with extended information content, dual language support including 2 byte character languages, and an intuitive control key interface per the following:


- Up to 10 InfoAlarm Command Centers are supported per 4100ES control panel; able to allow one InfoAlarm Command Center to take-control and to designate access levels for interfaces not in-control; LEDs can be programmed for in-control status indications
- Menu-driven format conveniently prompts operators for the next action required
- Key controls are provided to select the highlighted entry, load next screen of information, or jump to top or bottom of activity lists

(continued next page)

Description (Continued)

- Direct point callup displays individual points alphabetically and then homes in on the logical choice as more point information is entered
- A Site Plan bitmap can be displayed for reference; icons can be added to indicate system status
- Up to 50 custom point detail messages can be generated
- Date formats are either MM/DD/YY or DD/MM/YY
- Time formats are either 24 hour or 12 hour with AM/PM
- System Normal screen supports a gray scale bitmap (watermark) for location name, company logo, or site plan

Control Panel Operation Reference

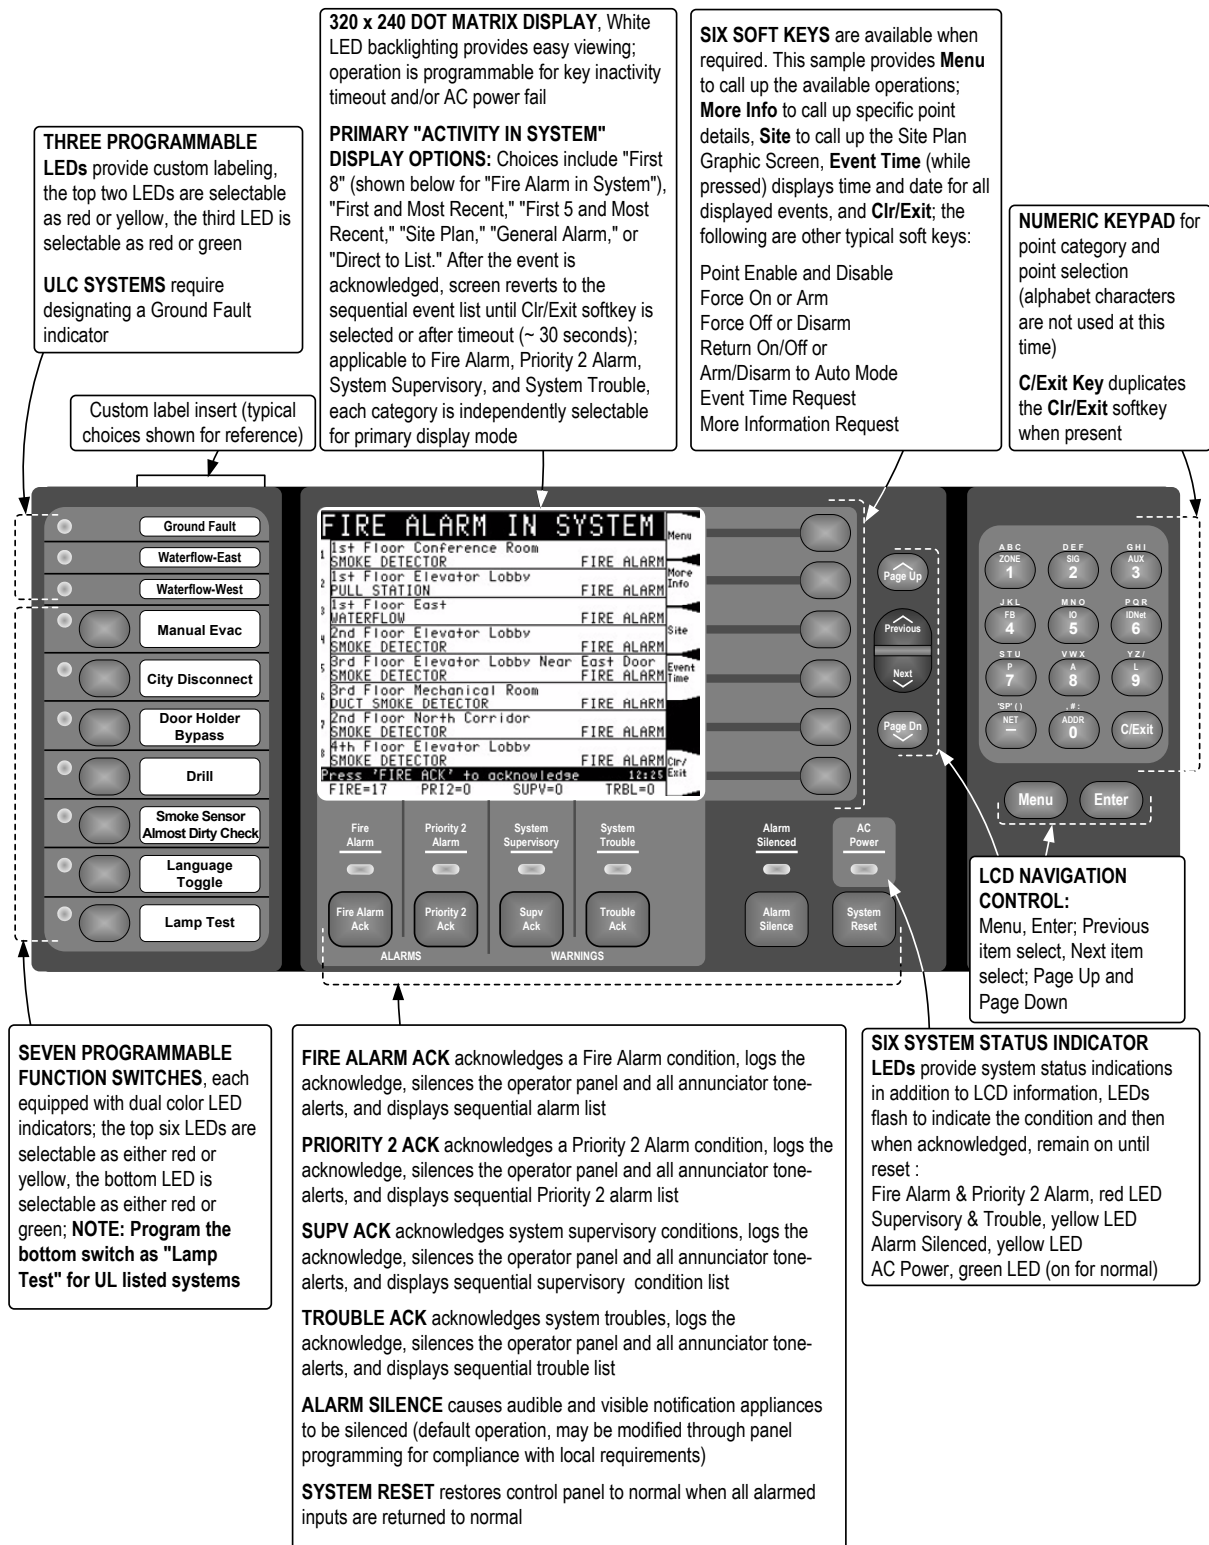

Display Feature Reference (shown actual size)

FIRST OCCURRENCES (UP TO 5) AND MOST RECENT OCCURRENCE, ACTIVITY IN SYSTEM DISPLAY ("Fire Alarm in System" screen shown for reference, see page 2 for a First 8 Events display)
FIRST OCCURRENCE advises of the time, date, device type, and custom label of the first occurrence of the event type displayed; the numerical count identifies the sequence of occurrence; when selected as the primary display screen, display of first occurrence and most recent occurrence is maintained until events are acknowledged which brings up the event list (similar to the First 8 display); the display reverts back to "First and Most Recent" when the Clr/Exit softkey is selected or after a time delay

FONT ATTRIBUTES include:
 Normal, **Bold**, Underline, **Double**, Dim, **Reverse**, Flash On/Off, Flash On/Dim, and commands for Vertical and Horizontal Placement

SOFT KEYS in this column correspond to the panel pushbutton switches; programming allows the soft keys to appear only when the functions are enabled

DISPLAY SIZE:
 4.53" W x 3.4" H
 (115 mm x 86 mm)

The screenshot shows a terminal-style display with the following content:

```

FIRE ALARM IN SYSTEM
FIRST OCCURRENCE - 11:43 AM 10/13/14
1 North Basement - Area C
  SMOKE DETECTOR FIRE ALARM
Basment Sprinklers
2 WATERFLOW FIRE ALARM
3 1st Floor Elevator Lobby
  SMOKE DETECTOR FIRE ALARM
4 2nd Floor East Corridor
  SMOKE DETECTOR FIRE ALARM
5 3rd Floor Elevator Lobby
  SMOKE DETECTOR FIRE ALARM
MOST RECENT - 12:21 PM 10/13/14
17 4th Floor Elevator Lobby
   SMOKE DETECTOR FIRE ALARM
Press 'FIRE ACK' to acknowledge 12:25
FIRE=17 PRI2=0 SUPV=0 TRBL=0
    
```

On the right side of the display, there are four softkey labels: Menu, More Info, Site, and Event Time. At the bottom right, there is a 'Clr/Exit' softkey.

TALLY COUNTS list the number of activities per category of Fire Alarm (FIRE), Primary 2 Alarm (PRI2), Supervisory (SUPV), and Trouble (TRBL)

COMMAND PROMPT advises the operator of the action required and displays local panel time



MOST RECENT advises of the time, date, device type, and custom label of the most recent occurrence of the list shown, in this case, the Fire Alarm list

Site Plan with Event Icons

Site Plan Bitmap. The InfoAlarm Command Center supports a site plan monochrome bitmap image (size is 281 pixels wide by 192 pixels high) that can also display icons indicating activity and location. Shown to the right is a sample site plan with icons shown in each building area. For this example, each area is showing an “A” for an initiating device in alarm, a “WF” for waterflow occurring, and an icon indicating notification appliances in alarm. (Icons can be created for site specific symbology, these are for example only.)

Site Plan Selection and Detail. If desired, the site plan can be the primary display screen for system activity or can be for reference, available by selecting the “Site” softkey. Depending on the facility layout, the site plan can also be a convenient location for common reference information such as primary call phone numbers, street address, etc. to assist operators in their assigned response.

System Normal Screen. The site plan (or another bitmap image) can be displayed on the System Normal screen as a grey image watermark behind the screen text. (Size and type are the same as that for a site plan bitmap). This can be used to identify the specific location of the 4100ES or can display a site-specific logo or other information. (A sample is shown on page 6.)

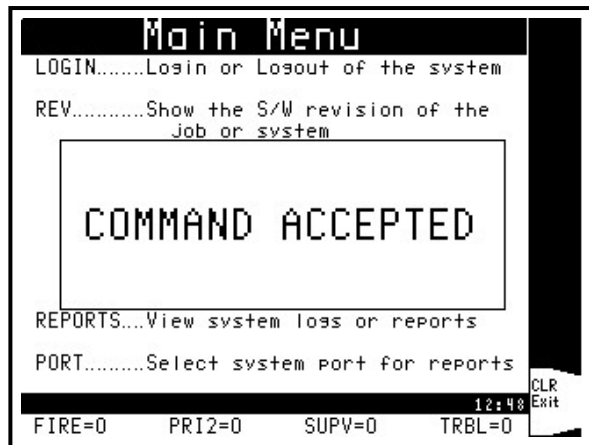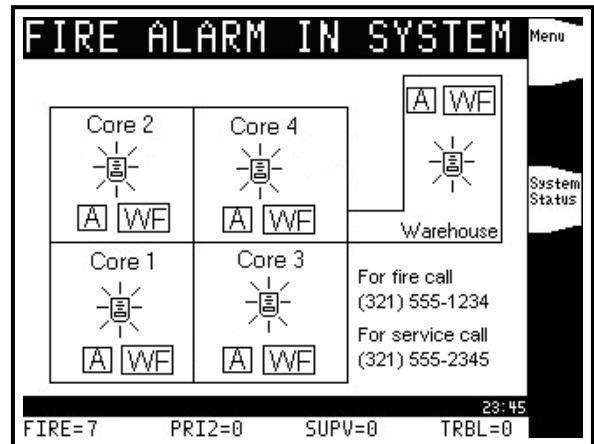


Customized Emphasis

The Main Menu screen illustration to the left demonstrates how print/display statements appear for status information or for prompting of user input. Other examples of this format occur when setting time and date, entering a password, or identification of a status change such as point enabling or disabling. Use of this feature allows the display to clearly focus the user on required information or actions.

Information Review


The Trouble Log History screen shown to the right identifies the ability to view multiple event entries with minimal scrolling. For specific information access, pressing “Next” or “Previous” on the keypad highlights the selected next or previous item in the list as indicated by the arrow and the bolded first line of Entry 6.

For access to the next or previous full screen of information, use the Page Dn or Page Up keys located to the right of the soft keys, each to the right of the display.

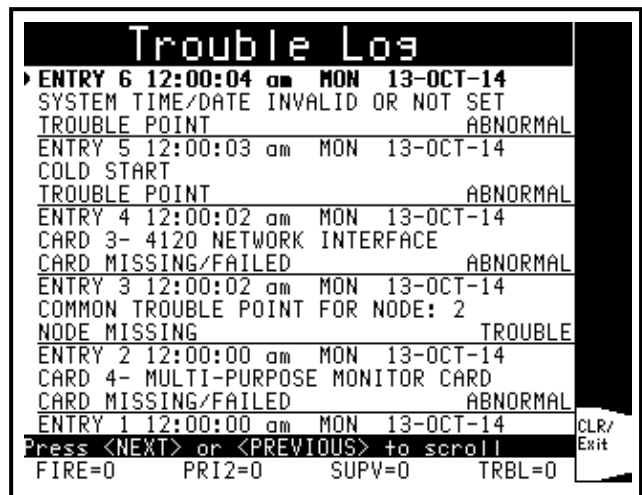

Additional Primary Display Screens

Below are samples of a First and Most Recent primary display and of a General Alarm display.

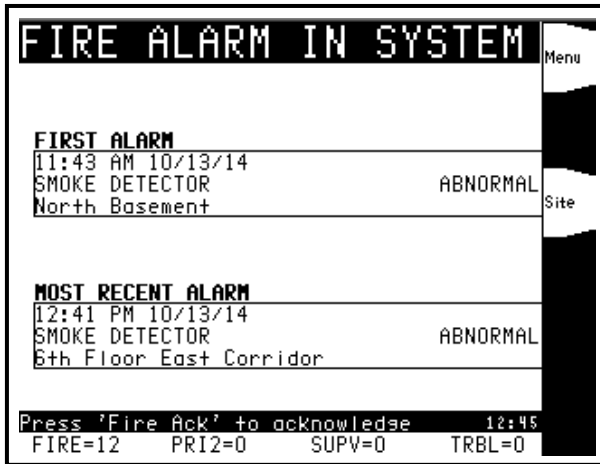


First and Most Recent Primary Display Option



General Alarm Primary Display Option

International Display Details

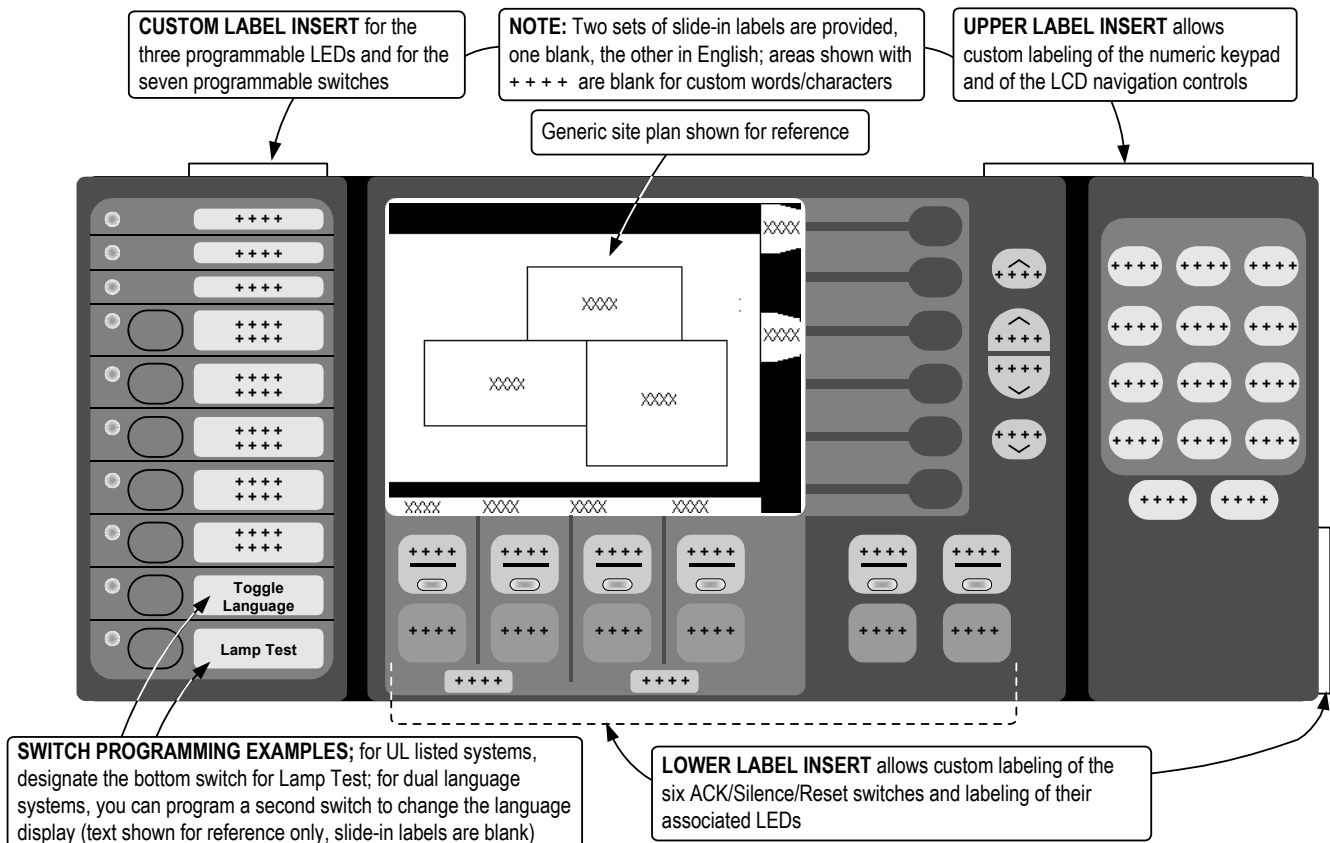

Additional 4100ES Data Sheet Reference

Data Sheet	Subject		Data Sheet	Subject	Data Sheet	Subject
S4100-0100	4100ES Panel Reference	With EPS power supplies	S4100-0034	Audio/Phone Modules	S4100-0045	Additional InfoAlarm Command Center Model Reference
S4100-0102	Network Display Unit		S4100-0032	LED/Switch Modules		
S4100-0103	MINIPLEX Transponders		S4100-0037	Enclosure Options		
S4100-0038	Remote Annunciators		S4100-0031	Additional 4100ES Basic Panel Reference		

Product Selection

4100ES Master Controller with InfoAlarm Command Center*

Model	Model Type	UL	ULC	Voltage	InfoAlarm Command Center Type	Master Controller Features
4100-9314	English	✓	—	120 VAC, 50/60 Hz	Master Controller Assembly; raised keys with fixed labels	Standard CPU Module with RUI+ isolated output communications interface; 9 A Enhanced Power Supply (EPS) with battery charger, electrically isolated 250 Point IDNet 2 Module, three Class B IDNAC SLCs, one 2 A output configurable for Auxiliary Power or Simple NAC operation and expansion slot for City Circuit or Alarm/Supv/Tbl Relay option.
4100-9315	English	—	✓			
4100-9316	French	—	✓			
4100-9513	International	✓	—	120 VAC, 50/60 Hz	Master Controller Assembly; flat keys with inserts for custom key labels	
4100-9512	International	✓	—	220/240 VAC, 50/60 Hz		

Network Display Unit (NDU) with Voice, Master Controller with InfoAlarm Command Center

(NOTE: See data sheet S4100-0102 for NDU feature details)

Model	Model Type	UL	ULC	Voltage	Description
4100-9352	English	✓	—	120 VAC, 50/60 Hz	Top Bay Equipment: InfoAlarm Command Center (raised keys with fixed labels); Network Interface Module (select media cards separately), Standard CPU Module with RUI output communications interface; 9 A System Power Supply (SPS) with battery charger, one 2 A Auxiliary Power output and expansion slot for City Circuit or Alarm/Supv/Tbl Relay option (NOTE: SPS IDNet channel, NACs and Aux Relay are disabled in NDU bay).
4100-9355	English	—	✓		Second Bay Equipment: Voice Command Center (VCC) Bay includes Standard CPU Module with RUI+ isolated output communications interface; Network Interface Module (select media cards separately); 9 A Enhanced Power Supply (EPS) with battery charger, electrically isolated 250 Point IDNet 2 Module, three Class B IDNAC SLCs, one 2 A output configurable for Auxiliary Power or Simple NAC operation, and expansion slot for City Circuit or Alarm/Supv/Tbl Relay option.

InfoAlarm Command Center Memory Option (may be required to be ordered separately, see description details)

Model	Description
4100-0640	Display Memory Expansion Module; included with NDU systems; required for all InfoAlarm Command Centers connected to a panel if any are using 2 byte character fonts; 6 Meg module mounts on rear of display board

Four Loop IDNet Master Controller Option

Model	Description
4100-3112	Four Loop IDNet Master Controller; for the Master Controller and VCC Assemblies listed above, this option moves the standard IDNet 2 Module from the Master Controller/VCC EPS to an available block space in the associated master controller or VCC bay and adds 2, 4100-3111 IDNet Loop Output Modules; requires selection of Factory Built Option 4100-7905; current requirements remain the same (refer to data sheet S4100-0100 for IDNet module details)

Remote InfoAlarm Command Center Control Assembly with Cabinet for Surface Mounting


Model	Cabinet Color	Application Type	Listing	Description
4100-9401	Red	English	UL & ULC	Remote InfoAlarm Command Center with NEMA 1 cabinet; for surface mounting; includes mounting box and door assembly with glass insert; uses RUI communications; requires external 24 VDC system voltage; see illustrations on page 7 and Installation Instructions 579-687 for details
4100-9403	Platinum			
4100-9421	Red	French/Canada	ULC	
4100-9423	Platinum			
4100-9441	Red	International	UL	
4100-9443	Platinum			

* Please refer to data sheet S4100-0100 for detailed descriptions of the 4100ES with EPS Basic Control Panel details, standard product features, options, and reference for related fire alarm control panel products, see data sheet list on page 5 for additional reference.

Remote InfoAlarm Command Center Front View



Remote InfoAlarm Command Center Mounting Reference

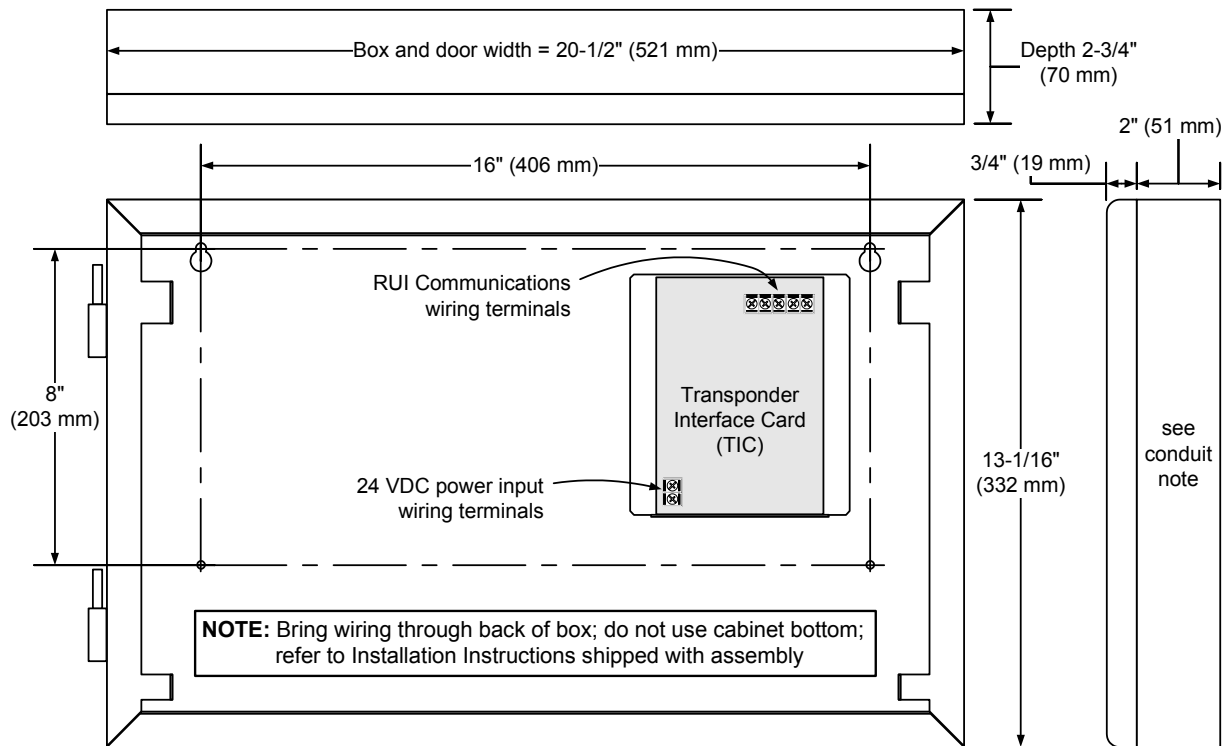

Specifications

General Display Specifications

Size Reference	Dot Matrix Size	320 x 240
	Active Display Area	4.53" W x 3.4" H (115 mm x 86 mm), includes header, footer, and softkey area; 5.66" diagonal measurement (144 mm)
	Characters	Up to 854 characters total using standard ASCII character font
	Designation	QVGA; one quarter of standard VGA (Video Graphics Array) display
Display Polarizer Type	Transflective with rear backlight	
Display Adjustment	Contrast adjustment is located on the controller module	
Backlight	White LEDs with intensity adjustment and selectable AC power fail operation; intensity adjustment is located on the controller module	
Backlighting Operation Options	On continuously; Off with AC power fail until a switch is pushed; selectable timeout without switch activity	

Control Panel Mounted InfoAlarm Command Center Current Requirements

Master Controllers (4100-9314, 4100-9315, 4100-9316, 4100-9513, 4100-9512)	Supervisory	497 mA @ 24 VDC	With 250 IDNet devices and 20 device LEDs in alarm; calculate other external loads separately
	Alarm	805 mA @ 24 VDC; backlight and tone-alert on	
Network Display Units, Voice (4100-9352, 4100-9355)	Supervisory	952 mA @ 24 VDC	
	Alarm	1.212 A @ 24 VDC; backlight and tone-alert on	

Remote Annunciators with InfoAlarm Command Center, Powered from Control Panel

Voltage	19 to 33 VDC (24 VDC nominal), system supplied; requires separate wiring		
Current	Supervisory	169 mA @ 24 VDC	
	Alarm	202 mA @ 24 VDC; backlight and tone-alert on	
Mounting Details; Stand-Alone Cabinet Models	See page 6 for reference illustration		
4100ES Capacity, RUI and RUI+ Output Reference (refer to data sheet S4100-0100 for additional 4100ES RUI+ information)	Type	RUI (Remote Unit Interface) external annunciator communications line SLC (signaling line circuit); RUI+ provides isolated output; Class B or Class A operation	
	Capacity	Up to 31 total remote RUI devices, including up to 10 InfoAlarm Command Center devices	
	Compatible RUI and RUI+ remote equipment	Remote InfoAlarm Command Center, MINIPLEX transponders, 4603-9101 LCD Annunciators, and 4100 Series 24 I/O and LED/Switch modules	
	Compatible RUI only remote equipment	4602 Series LED/Switch and I/O Annunciator modules, including 4602-9101 Status Command Units (SCU), and 4602-9102 Remote Command Units (RCU); (refer to data sheet S4602-0001)	
Wiring Requirements	Data	Single twisted, shielded pair, 18 AWG (0.82 mm ²)	
	Power	18 to 12 AWG (0.82 mm ² to 3.31 mm ²) wires for 24 VDC system power	
	Earth	A dedicated earth ground connection to the electrical box is required for proper ESD and EMI protection; wire in accordance with NFPA 70 (<i>National Electrical Code</i>) Article 250	

Custom Point Detail Messages

Message Location Details	Select "more info" softkey when investigating point detail and scroll to the bottom of the information; typical messages might include contact details (phone numbers, pager numbers, etc.) and other contact or reference information		
Number of Messages	Up to 50		
Message Size	Character Details	120 characters; visible characters = 116; (lines 1 and 2 require one carriage return character and one line feed character)	
	Line Details	3 lines total; 40 characters maximum per line; line 3 may be limited to 36 visible characters depending on characters in lines 1 and 2	
Environmental	Operating Temperature	32° to 120°F (0° to 49° C)	
	Operating Humidity	Up to 93% RH, non-condensing @ 90° F (32° C) maximum	

TYCO, SIMPLEX, and the product names listed in this material are marks and/or registered marks. Unauthorized use is strictly prohibited. National Electrical Code and NFPA are trademarks of the National Fire Protection Association.



Tyco Fire Protection Products • Westminster, MA • 01441-0001 • USA
www.simplex-fire.com

S4100-0101-7 1/2016

© 2015 Tyco Fire Protection Products. All rights reserved. All specifications and other information shown were current as of document revision date and are subject to change without notice.