



LATERAL TELESCOPING BRACE ASSEMBLY



CERTIFICATIONS



FEATURES

Complete, out of the box assembly is compatible with both steel (IPS) and CPVC piping

Telescoping brace member eliminates the need to cut pipe, minimizing waste and allowing one person to effectively complete the installation

Easy "push-to-install" nVent CADDY Rod Lock feature allows the V-bolt to assemble quickly, and helps eliminate the risk of compressing CPVC pipe

Length of telescoping lateral brace is fixed by installing the included self-drilling screw

Electrogalvanized coating throughout the entire assembly provides superior corrosion resistance, and eliminates the risk of exposing CPVC pipe to any harmful oils or residue

Designed to reduce the installation time of a complete brace by up to 80%

Design allows center loading of brace on the service pipe

Meets requirements of NFPA® 13

FM® Specification Tested

Certified chemically compatible with CPVC piping systems

Meets CEN/TS 17551:2021 requirements for Seismic Sway Bracing

SPECIFICATIONS

Finish: Electrogalvanized

Material: Steel

Catalog Number	Brace Length(L)	Pipe Size	Hole Size(HS)	Wrench Size	UL Listed Load
CSBT1	1' - 1 1/2'	1" - 4"	1/2"	5/16"	1,300 lb
CSBT2	1 1/2' - 3'	1" - 4"	1/2"	5/16"	1,300 lb


ADDITIONAL PRODUCT DETAILS

UL Listed Load applies to Sch 40, Sch 10, Youngstown Tube Fire-Flo (1-1/2" to 4"), Bull Moose Eddy Flo (1-1/4" to 4"), and Wheatland Mega Flow (1-1/4" to 4") service pipes.

Wrench Size represents the hex size used to tighten the self-drilling screw.

Vertical Distance from Structure to Pipe Centerline Based on 45° Brace Angle				
Part Number	Pipe Size			
	1"	2"	3"	4"
CSBT1	10" - 13"	10" - 13"	11" - 14"	11" - 14"
CSBT2	12" - 22"	12" - 23"	13" - 23"	13" - 24"

DIAGRAMS

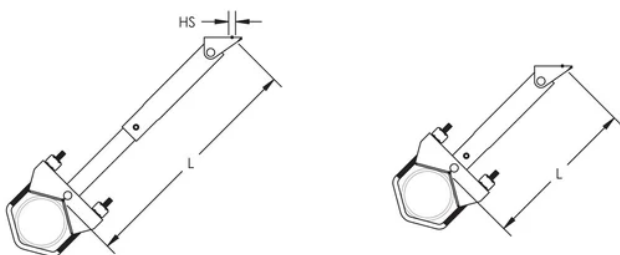

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.nvent.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

North America

+1.800.753.9221

Option 1 – Customer Care

Option 2 – Technical Support

Europe

Netherlands:

+31 800-0200135

France:

+33 800 901 793

Europe

Germany:

800 1890272

Other Countries:

+31 13 5835404

APAC

Shanghai:

+ 86 21 2412 1618/19

Sydney:

+61 2 9751 8500



Our powerful portfolio of brands:
nVent.com CADDY ERICO HOFFMAN RAYCHEM SCHROFF
TRACER