




CZ-6 Six Zone Interfacel Module



CR-6 Six Relay Control Module



SC-6 Six Supervised Control Module



IM-10 Ten Input Monitor Module

Description

The 500 Series multiple input and output modules are designed to meet a range of applications in which numerous single modules are used. This design allows for installation ease and time savings. The monitor and control modules can be used to supervise and activate sounders, strobes, door closers, pull stations, waterflow switches, conventional smoke detectors and more. The conventional zone interface module is ideal for retrofit applications to monitor zones of conventional two-wire detectors. Each module has its own address. Modules are addressed with easy-to-use rotary code switches. Provisions are included for disabling unused addresses. Up to two modules mount in a BB-2 enclosure with built-in chassis and up to six modules mount in a BB-6 enclosure with the CH-6 chassis. Wiring terminals are easily accessible for trouble-shooting purposes.

CR-6 Six Relay Control Module

The CR-6 Six Relay Control module consists of six Form-C relays. The first address is set from 01 to 94, while the remaining modules are automatically assigned to the next five higher addresses. Provisions are included for disabling a maximum of three unused addresses. A single isolated set of dry relay contacts is provided for each module address which is capable of being wired for either a normally open or normally closed operation. The module allows the control panel to switch these contacts on command. No supervision is provided for the controlled circuit.

Features

- Removable 12-18 AWG plug-in terminal blocks
- Individual LED indicators
- Unused addresses may be disabled
- Rotary address switches
- Class A or B operation
- Mount up to 2 modules in BB-2 enclosure (optional)
- Mount up to six modules in BB-6 enclosure with CH-6 chassis (optional)
- Mounting hardware included

SC-6 Six Supervised Control Module

The SC-6 Six Supervised Control module provides supervised monitoring of wiring to load devices that require an external power supply or amplifier to operate, such as horns, strobes, speakers or bells. Upon command from the control panel, the SC-6 will disconnect the supervision and connect the external power supply across the load device. The first module is addressed from 01 to 94, while the remaining modules are assigned to the next five higher addresses. Provisions are included for disabling a maximum of three unused modules. Each module has terminals for connection to an external supply circuit for powering devices on its notification appliance circuit. One or multiple power supplies or amplifiers may be used. There is a short circuit protection monitor for each module. This is provided to protect the external power supply against short circuit conditions on the NAC. When an alarm condition occurs, the relay which connects the external supply to the NAC will not be allowed to close if a short circuit condition currently exists on the NAC. In addition, an algorithm is incorporated to find a short when the module is active. The module will close all circuits that are not shorted to find the NAC with the problem.

CZ-6 Six Zone Interface Module


The CZ-6 Six Zone Interface module provides an interface between the intelligent alarm system and a two-wire conventional detection zone. A common SLC input is used for all modules, and the initiating device circuits share a common external supply. Otherwise, each module operates independently from the others. The first module is addressed from 01 to 94 while the remaining modules are assigned to the next five higher addresses. Provisions are included for disabling a maximum of two unused modules. All two-wire detectors being monitored must be two-wire compatibility listed with the modules. The CZ-6 transmits the status of a zone of two-wire detectors to the fire alarm control panel. Status conditions are reported as normal, open or alarm. The interface module supervises the zone of detectors and the connection of the external power supply.



IM-10 Ten Input Monitor Module

The IM-10 Ten Input Monitor module provides an interface between a control panel and normally open contact devices such as pull stations, security contacts, or flow switches. The first address is set from 01 to 90 and the remaining modules are automatically assigned to the next nine higher addresses. Provisions are included for disabling a maximum of two unused addresses. The supervised state (normal, open or short) of the monitored device is sent back to the panel.

Accessories

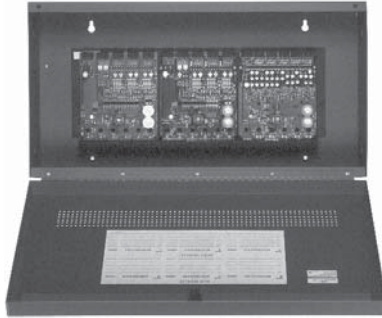

BB-6S Enclosure with CH-6 chassis



BB-2S Enclosure

General Specifications

Operating Voltage	15-32 VDC
Max. SLC Wiring Resistance	40 Ohms
Temperature Range	32° to 120°F (0° to 49° C)
Relative Humidity	10% to 85% noncondensing
Wire Gauge	12-18 AWG
Dimensions	6.8"H x 5.8"W x 1.25"D

CR-6 Specifications

Standby Current	1.45 mA maximum
Alarm Current	32 mA maximum (assumes all six relays have been switched once and all six LEDs solid on)
Max. IDC Wiring Resistance	40 Ohms
Relay Current	30 mA/Relay Pulse (15.6 mS pulse duration) pulse under panel control
Relay Contact Ratings	30 VDC; 70.7 VAC

SC-6 Specifications

Standby Current	2.25 mA maximum
Alarm Current	35 mA maximum (assumes all six relays have been switched once and all six LEDs solid on)
Max. NAC Wiring Resistance	40 Ohms
Power Rating Per Circuit	63W @ 70.7VAC
Relay Contact Ratings	30 VDC; 110 VAC

CZ-6 Specifications

Standby Current	2 mA maximum
Alarm Current	40 mA maximum (assumes all six LEDs solid on)
Max. IDC Wiring Resistance	25 Ohms
External Supply Voltage	
DC Voltage:	18-28 volts power limited
Ripple Voltage:	0.1 volts RMS maximum
Current:	90mA per module
Compatible Detectors	Contact Mircom

IM-10 Specifications

Standby Current	3.5 mA maximum
Alarm Current	60 mA maximum (assumes all ten LEDs solid on)
Max. IDC Wiring Resistance	40 Ohms
Maximum IDC Voltage	12 VDC
Maximum IDC Current	1 mA

BB-2S Enclosure

Dimensions	12"H x 9"W x 3.67"D
------------	---------------------

BB-6S Enclosure

Dimensions	24"H x 12.55"W x 6.47"D
------------	-------------------------

Ordering Information

Model	Description
CR-6	Six Relay Control Module
SC-6	Six Supervised Control Module
CZ-6	Six Conventional Zone Interface Module
IM-10	Ten Input Monitor Module
BB-2S	Module enclosure with built-in chassis; holds maximum of two modules
BB-6S	Module enclosure, chassis sold separately; holds maximum of six modules
CH-6S	Mounting chassis for BB-6 enclosure

Note: For Canadian models add suffix "A".

NOT TO BE USED FOR INSTALLATION PURPOSES.



Canada

25 Interchange Way
Vaughan, Ontario L4K 5W3
Telephone: (905) 660-4655
Fax: (905) 660-4113

U.S.A.

4575 Witmer Industrial Estates
Niagara Falls, NY 14305
Toll Free: (888) 660-4655
Fax Toll Free: (888) 660-4113

Web page: <http://www.mircom.com> Email: mail@mircom.com

Distributed by:

ISO 9001:2008
REGISTERED



CAT. 5923
Rev. 4