


Class 125 (Standard) Fig. 3360R Reducing Cross



For Listings/Approval Details and Limitations, visit our website at www.asc-es.com or contact an ASC Engineered Solutions™ Sales Representative.

Material Specifications

Dimensions: ASME B16.4 Class 125

Material: ASTM A126


Finish: Black or Hot Dip Galvanized per ASTM A153 Class A

Threads: NPT per ASME B1.20.1

Agency Approvals: All cast iron threaded fittings are UL/ULC Listed and FM Approved.

Figure 3360R Reducing Cross

Nominal Size 1 x 1 x 2 x 2	Maximum Working Pressure ▲	Dimensions		Approx. Wt. Each
		A	B	
In. (mm)	psi (kPa)	In. (mm)	In. (mm)	Lbs. (kg)
1¼ x 1¼ x 1 x 1	300	1.58	1.67	2.05
32 x 32 x 25 x 25	2065	40.13	42.41	0.93
1½ x 1½ x 1 x 1	300	1.65	1.80	2.40
40 x 40 x 25 x 25	2065	41.91	45.72	1.09
2 x 2 x 1 x 1	300	1.73	2.02	2.75
50 x 50 x 25 x 25	2065	38.60	44.45	1.25

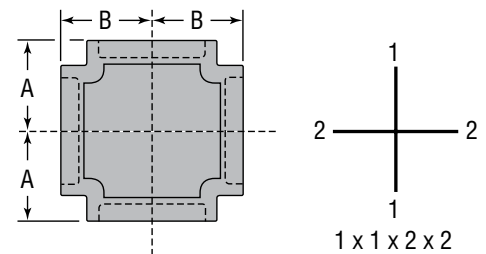

▲ – Working Pressure Ratings are for reference only and based on Sch. 40 pipe. For the latest UL/ULC, and FM pressure ratings versus pipe schedule, please visit asc-es.com or contact your local ASC Engineering Solutions™ Representative.

PROJECT INFORMATION	APPROVAL STAMP
Project:	Approved
Address:	Approved as noted
Contractor:	Not approved
Engineer:	Remarks:
Submittal Date:	
Notes 1:	
Notes 2:	