



Audio Power Amplifier, 125 Watts

Model 1B3125



Overview

The 1B3125 Power Amplifier is rated at 125 Watts continuous (RMS) power and it contains circuitry for 24 Vdc backup. The Amplifier mounts in a standard 19 in (483mm) rack. Output Voltage may be 25 or 70 VRMS. Supply voltage is 120/240 V, 50/60 Hz, or optionally 24-28 Vdc. The Amplifier contains electronic protection safeguards against overloads or shorted output. A thermal overload protection circuit is also included that opens the primary power circuit if the unit overheats. Both protection circuits are self-restoring. The system may incorporate a Standby Amplifier as a backup against any unit failure.

Standard Features

- 24 Vdc battery backup
- Broad frequency response
- Low distortion
- Thermal circuit breaker
- Electronic protection
- UL listed under standards 1711, 1480 and 813
- ULC listed

Application

The 1B3125 Power Amplifier is used in Banked Amplifier Systems. The system supports up to six audio channels.

Engineering Specifications


The Power Amplifier shall be Edwards 1B3125 or an approved equivalent, and it shall be capable of delivering 125 Watts continuous (RMS) power with less than 0.5% harmonic distortion in the 45 Hz to 20 kHz bandwidth (measurements are made at the 70.7V tap). The frequency response shall be 20 Hz to 20 kHz (+0, -1 dB) per EIA Standard SE-101A. The signal-to-noise ratio shall be greater than -90 dB below rated output for the 20 Hz to 20 kHz bandwidth. Input sensitivity shall be 1 VRMS at 1 kHz for rated output, and input impedance shall be 75 k Ohms. The output load (voltage) shall be 40 Ohms (70.7 V), 5 Ohms (25 V), and 8 Ohms (31.6 V), and there shall be a 25 Volt center tap. Output regulation

shall be better than 1 dB (zero load to full load). A rear-mounted input level control shall be provided.

The Amplifier shall have an electronic protection circuit as a safeguard against damage caused by overloads or shorted output. A thermal overload protection circuit shall be provided on the heatsink to open the primary power circuit and illuminate a thermal overload LED whenever the amplifier overheats. Both protective circuits shall be self-restoring. The normal power source shall be 120/240 V 50/60 Hz, and the system shall draw 3.0 Amps at 120 Vdc power required shall be 11.5 Amps at rated output.

Terminations shall be screw terminal strips with barriers on the output. The Power Amplifier shall be 5-1/4 in (133mm) high, 19 in (483mm) wide, 6-5/8 in (168mm) deep, and be finished in charcoal baked enamel. Net weight shall not exceed 22.5 lbs (10.1 kg). The Amplifier shall be acceptable for Fire Protective Signaling Systems, approved and tested under UL Standards 1711, 1480, and 813. The amplifier shall be listed by ULC.

Connection Diagram

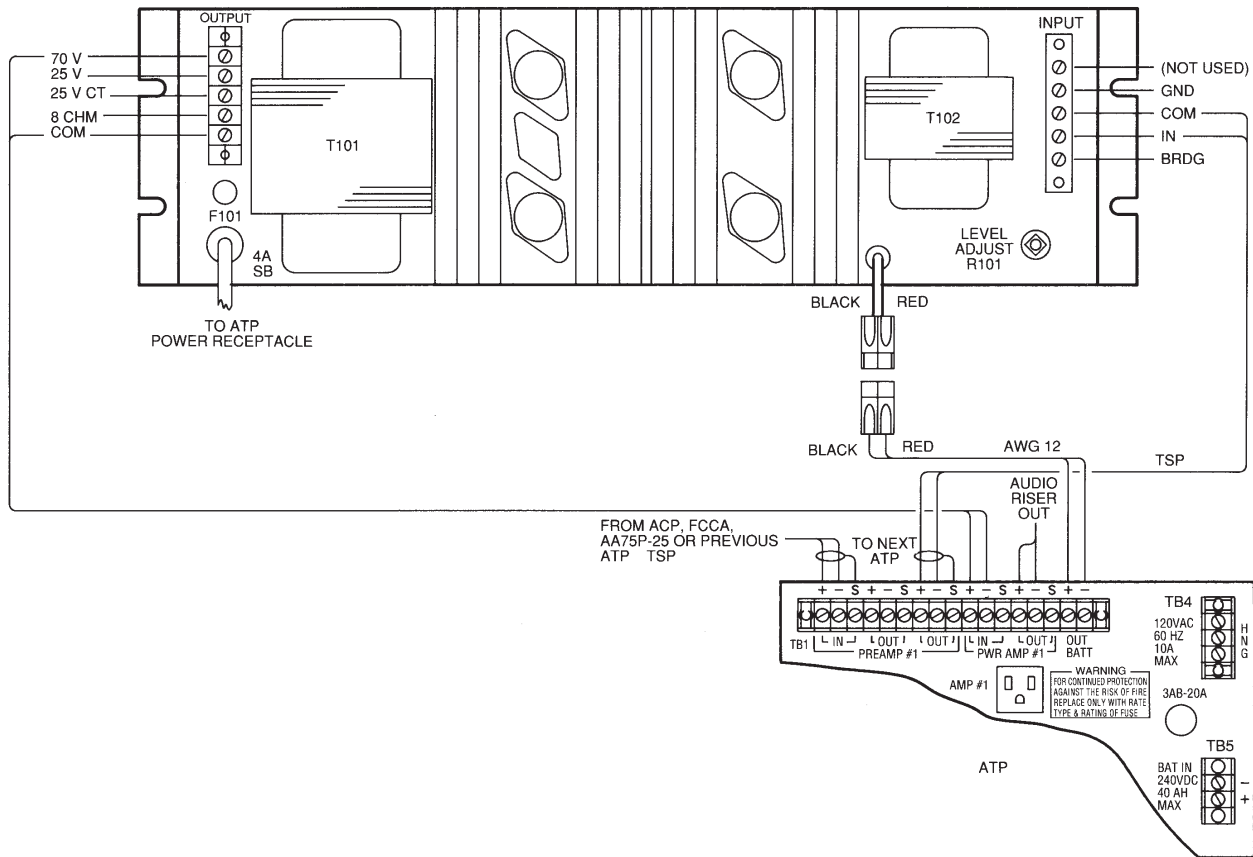

Specifications

Power Output	125 Watts continuous (RMS)
Harmonic Distortion	Less .5% 45 to 20 kHz at rated output
Frequency Response	20 to 20 kHz (+0, -1 dB) per EIA Standard SE 101-A
Signal to Noise Ratio	Greater than -90 dB below rated output (20 to 20 kHz bandwidth)
Input Sensitivity	1 VRMS at 1 kHz for rated output
Input Impedance	75 kOhm
Output Load (Voltage)	75 kOhm (70.7 V) balanced 2.5 kOhm (25 V) balanced 25 V center tap 8 Ohm (31.6 V) balanced
Output Regulation	Better than 1 dB, zero load to full load
Controls	Input level control, rear panel
Terminations	Screw terminal strips, barriers on output
Indicators	LED power, LED Thermal Overload
Power Source	120/240 Volts, 50/60 Hz; 24-28 Vdc
AC Power Required	3.0 Amps (120 V)/ 1.5 Amps (240 V), 0.22 Amps at idle
DC Power Required	11.5 Amps at rated output
Fuse	4 Amp, slow blow; 15 Amp (DC)
Finish	Charcoal, baked enamel
Dimensions	5-1/4 in (133mm) high, 19 in (483mm) wide, 6-5/8 in (168mm) deep

Ordering Information

Catalog Number	Description	Shipping Weight
1B3125	Audio Power Amplifier, 125 Watts	22.5 lbs (10.1 kg)



Contact us...

Email: edwards.fire@fs.utc.com

Web: www.est-fire.com

EST is an **EDWARDS** brand.

1016 Corporate Park Drive
Mebane, NC 27302

In Canada, contact Chubb Edwards...

Email: inquiries@chubbedwards.com

Web: www.chubbedwards.com

© 2013 UTC Fire & Security Americas Corporation, Inc. All rights reserved. Specifications subject to change without notice. Edwards is part of UTC Climate, Controls & Security, a unit of United Technologies Corporation.
