


SWITCH / CIRCUIT BREAKER COMBOS


PSP SERIES

Power Control Centers, 4 Amp or 10 Amp Switch / Circuit Breaker, 120 Vac, 2 Outlets, Terminal or Wire Connections, NEMA 1 Housing

PSPT2RB4 / PSPT2RB10

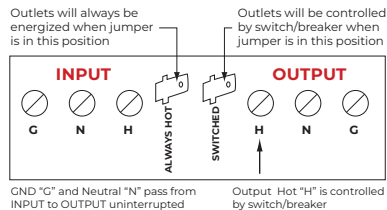

PSPW2RB4 / PSPW2RB10

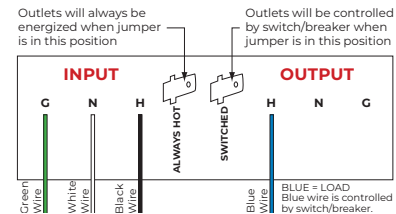

PSP SERIES SELECTION GUIDE

Model #	Circuit Breaker	Terminals	Wires
PSPT2RB4	4 Amps	Yes	No
PSPT2RB10	10 Amps	Yes	No
PSPW2RB4	4 Amps	No	16", 600V Rated
PSPW2RB10	10 Amps	No	16", 600V Rated

SPECIFICATIONS

Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Circuit Breaker: 4 Amp Max. or 10 Amp Max.
Dimensions: 4.00"H x 4.00"W x 1.81"D with 0.50" NPT hub
Origin: Made of US and non-US parts
Approvals: UL Listed, UL916, C-UL, CE, RoHS
Housing Rating: UL Accepted for Use in Plenum, NEMA 1
Terminals: (PSPT2RB4 and PSPT2RB10)
 Ground "G" and Neutral "N" pass from INPUT to OUTPUT uninterrupted. OUTPUT Hot blue wire is controlled by the switch/breaker.

Note:

Indicator light will illuminate when switch/breaker is ON (RESET position) indicating power has been transferred from INPUT to OUTPUT by the switch/breaker. If it is desired for the indicator light to be illuminated continuously to indicate the presence of input (Line) power, INPUT and OUTPUT may be reversed -- connect input power from line to OUTPUT and connect output load to INPUT (operation of the jumpers above also reverses).