

Overview

The SIGA-DMP Detector Mounting Plate is part of GE Security's Signature Series family. It is a 7 inch (178mm) square mounting plate designed to provide convenient mounting of Signature Series intelligent smoke detectors in raised floor or plenum applications. The detector mounting plate may also be installed in low velocity ducts that have a maximum width of up to 36 inches (915mm) and a maximum height of up to 36 inches (915mm). It includes a 4 inch square junction box for wiring connections.

The SIGA-DMP is compatible with the following Signature Series smoke detectors and detector mounting bases:

- SIGA-PS Intelligent Photoelectric Smoke Detector
- SIGA-PHS Intelligent 3D Multisensor Smoke Detector
- SIGA-IPHS Intelligent 4D Multisensor Smoke Detector
- SIGA-SB Standard Base; SIGA-RB Relay Base
- SIGA-IB Isolator Base.

Mounting hardware is included along with a drilling template and rubber gasket which forms air tight seal between the mounting plate and the mounting surface. The complete assembly is finished in red epoxy powder coat for maximum durability and easy identification.

Standard Features

- **Compatible with Signature Series detectors**
Use in raised floor and plenum applications or low velocity HVAC ducts
- **Standard, relay, fault isolator mounting bases**
- **Designed to ISO9001 standards**
Manufactured to strict international quality standards for highest reliability.

Application

The SIGA-DMP may be installed in any of three possible configurations.


Installation Option #1: In applications in which the SIGA-DMP is mounted in a clearly visible location, a remote LED (model SIGA-LED) may be mounted directly to the SIGA-DMP to indicate Alarm conditions of the smoke detector.

Installation Option #2: In applications in which an intelligent control relay module (model SIGA-CR) is mounted directly to the SIGA-DMP, a remote LED (model SIGA-LED) must be mounted at a remote location to provide indication of Alarm conditions of the smoke detector.

Installation Option #3: In applications in which the SIGA-DMP is not located in a clearly visible location, a remote LED (model SIGA-LED) must be mounted at a remote location to provide indication of Alarm conditions to the smoke detector.

Detector Mounting Plate

SIGA-DMP

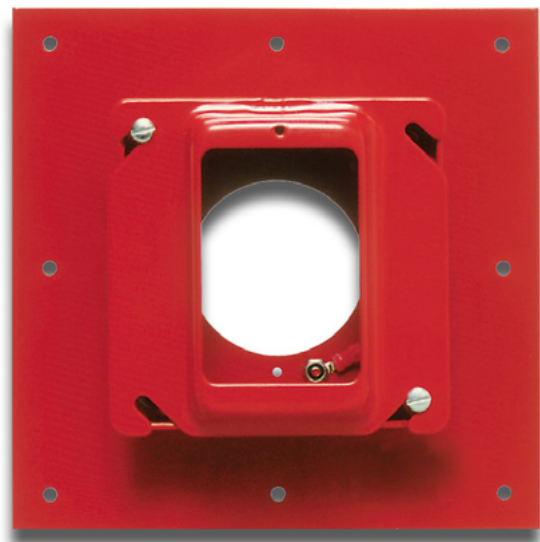

MEI



U.S.
T 888-378-2329
F 866-503-3996

Canada
T 519 376 2430
F 519 376 7258

Asia
T 852 2907 8108
F 852 2142 5063

Australia
T 61 3 9259 4700
F 61 3 9259 4799

Europe
T 32 2 725 11 20
F 32 2 721 86 13

Latin America
T 305 593 4301
F 305 593 4300

www.gesecurity.com/est

© 2006 General Electric Company
All Rights Reserved

Signature Series is a Trademark
of GE Security.

Specifications

Agency Listings	UL, ULC, MEA, CSFM
Compatible Detectors	SIGA-PS Intelligent Photoelectric Detector SIGA-PHS Intelligent 3D Multisensor Detector SIGA-IPHS Intelligent 4D Multisensor Detector NOTE: For proper operation, only the specified detectors should be used with the SIGA-DMP
Sensitivity Range	0.67% - 3.7% obscuration/ft.
User Selected Alarm Sensitivity Settings	Most Sensitive: 1.0% More Sensitive: 2.0% Less Sensitive: 3.0% Least Sensitive: 3.5% Normal: 2.5%
Compatible Bases	SIGA-SB Standard Base; SIGA-RB Relay Base; SIGA-IB Isolator Base
Compatible Remote Annunciator	SIGA-LED Remote LED Indicator (Use ONLY with SIGA-SB Standard Base)
Maximum Duct Size	36 inches (915mm) x 36 inches (915mm) with up to 3/4 inch (19mm) Wall Thickness
Air Velocity Range	For SIGA-PS, 0 - 5,000 ft/min (0 - 25.39 m/s) For SIGA-PHS, 0 - 5,000 ft/min (0 - 25.39 m/s) For SIGA-IPHS, 0 - 500 ft/min (0 - 2.54 m/s)
Operating Temperature Range	32° - 120°F (0° - 49°C) for SIGA-PS 32° - 100°F (0° - 38°C) for SIGA-IPHS, -PHS
Operating Humidity Range	0 - 93% RH

Ordering Information

Catalog Number	Description	Ship Wt. lbs (kg)
SIGA-DMP	Detector Mounting Plate	3.0 (1.4)
SIGA-PS	Intelligent Photoelectric Detector	
SIGA-PHS	Intelligent 3D Multisensor Detector	0.5 (.23)
SIGA-IPHS	Intelligent 4D Multisensor Detector	
Accessories		
SIGA-SB	Detector Mounting Base	
SIGA-RB	Detector Mounting Base w/Relay	
SIGA-IB	Detector Mounting Base w/Fault Isolator	0.2 (.09)
SIGA-LED	Remote Alarm LED	



imagination at work