

# Farenhyt



SILENT  
KNIGHT

by Honeywell

Intelligent Device

## Addressable Monitor Module

### IDP-Monitor

The IDP-Monitor is an addressable monitor module for use with Silent Knight IFP-series fire alarm control panels (FACPs). The IDP-Monitor acts as an interface to contact devices, such as waterflow switches and pull stations.

The IDP-Monitor supports Class A supervised or Class B supervised wiring to the load device. Conventional 4-wire smoke detectors can be monitored for alarm and trouble conditions.

### Features

- Single contact monitor
- Support for Class A and Class B wiring
- Fully supervised
- Panel controlled status LED that flashes green in normal state and is solid red in alarm
- Attractive ivory cover plate
- Rotary address switches for fast installation
- SEMS screws for easy wiring
- UL Listed

### Installation

The IDP-Monitor mounts directly into a 4" square electrical box. The box must have a minimum depth of 2-1/8". A surface mount electrical box (System Sensor® PN SMB500) is available from Silent Knight.

## Agency Listings



MEA

386-0-E-Vol 2



IDP-Monitor


## Compatibility

The IDP-Monitor is compatible with the following FACPs:


- IFP-2000 / RPS-2000 Intelligent Fire Panel
- IFP-2000ECS Emergency Communication System with Fire Panel
- IFP-1000 / ECS Intelligent Fire Panel
- IFP-100 / ECS Intelligent Fire Panel
- IFP-50 Intelligent Fire Panel

P/N 350288 Rev J

Copyright © 2015 Honeywell International Inc.

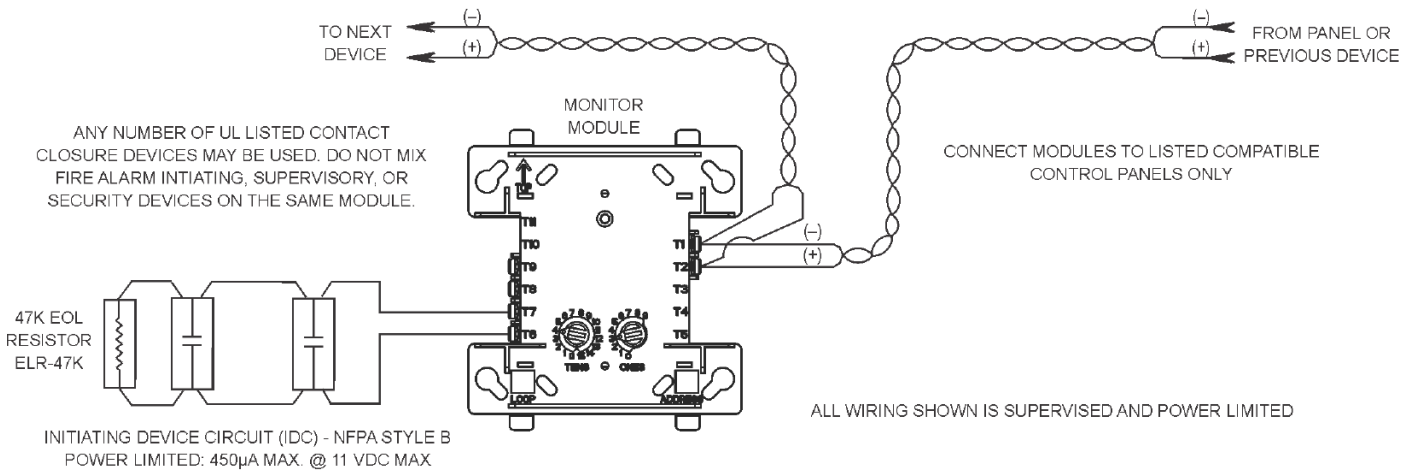

Typical Wiring for IDP-Monitor Module, NFPA Style B

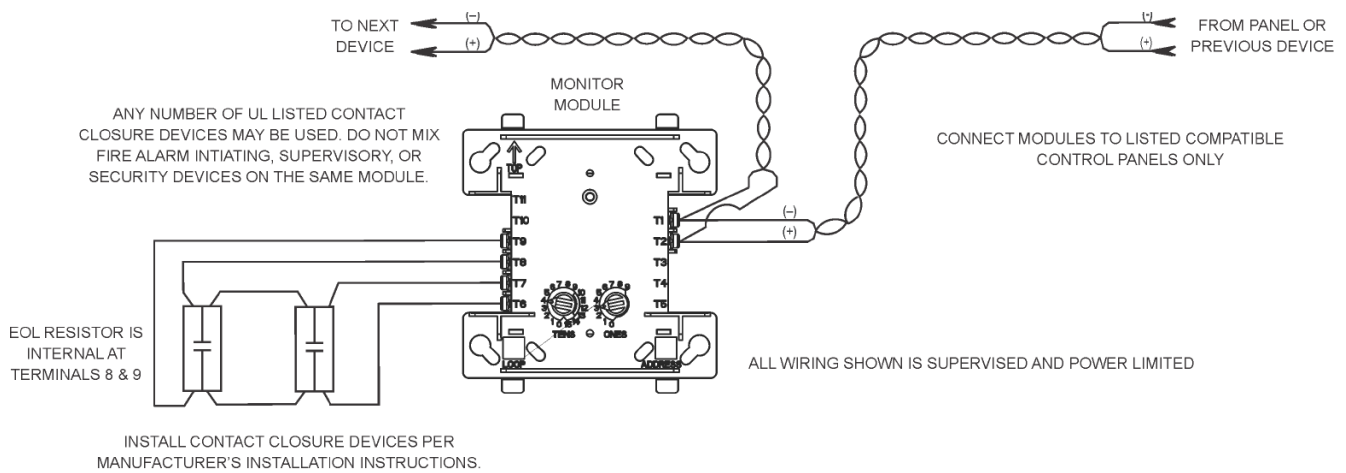

Typical Wiring for IDP-Monitor Module, NFPA Style D

## Specifications

### Physical

Height: 4.5" (11.4 cm)

Width: 4" (10.2 cm)

Depth: 1.25" (3 cm)

Shipping Weight: 6.3 oz (196 g)

### Electrical

Operating Voltage: 15 – 32 VDC

SLC Standby and Alarm Current Draw: 350  $\mu$ A

End-of-Line Resistance: 47K  $\Omega$

Max. IDC wiring resistance: 1,500  $\Omega$

Max. IDC Voltage: 11 Volts

Max. IDC Current: 450  $\mu$ A

SLC Loop Resistance: 40  $\Omega$  max.

### Environmental

Operating Temperature: 32°F – 120°F (0°C – 49°C)

Humidity: 10% – 93% non-condensing

### Ordering Information

IDP-Monitor      Monitoring Module

### Accessories

SMB500      4" Square Surface Mount Electrical Box



**SILENT  
KNIGHT**

by Honeywell

This document is not intended to be used for installation purposes. We try to keep our product information up-to-date and accurate. We cannot cover all specific applications or anticipate all requirements. All specifications are subject to change without notice. For more information, contact Silent Knight 12 Clintonville Road, Northford, CT 06472-1610 Phone: (800) 328-0103, Fax: (203) 484-7118.

For Technical Support, Please call 800-446-6444. [www.farenhyt.com](http://www.farenhyt.com)