EST Fire & Life Safety EST3 Multiplexed Fire Alarm System

Overview

EST3 has a wide selection of cabinet arrangements allowing the greatest use of EST3's flexible modular design. From the elegant contoured door design of the lobby enclosure through the standard design of remote closet cabinets both aesthetics and function are easily addressed.

Lobby enclosure wallboxes are manufactured from #14 AWG cold rolled steel with a gray baked enamel finish. Lobby enclosure doors are manufactured from #14 AWG cold rolled steel and have a modern contoured door design with integral viewing window. The exception is the small lobby enclosure 3-CAB5. The 3-CAB5 wallbox and non-contoured door are #16 AWG cold rolled steel. Lobby enclosure doors come with gray baked enamel or optional red baked enamel finishes. The EST3 lobby enclosures back boxes, doors and chassis units are ordered and shipped separately. The 3-CAB5 lobby enclosure comes complete with door and back box providing space to mount five local rail modules.

The EST3 remote closet cabinet design allows the installation of control panel electronics in electrical closets. The remote closet cabinets have left hand hinged doors and are available with red finish only. Optional display modules used for system diagnostics display, mount behind the closet cabinet door and are not visible with the door closed.

Standard Features

- Right or left hand hinging of doors
- Lag and Keyway holes for quick mounting
- Attack rated door for security applications
- Knockouts for 3/4 inch conduit
- Attractive contour door design on lobby enclosures
- Combination flush or surface mounting lobby enclosure design
- Remote closet cabinets for electrical closet mounting support up to 65 AMP hour batteries

EST3 Cabinets and Chassis

3-CAB series, 3-RCC series, 3-CHAS7 series











EN54-2:1997+A1 and EN54-4:1997+A1:2002+A2 pending



Application

Lobby Enclosures

EST3 lobby enclosures provide space for control, monitoring and display modules. Ideal for mounting in lobby's where appearance is important, maximum mounting flexibility is provided with doors that will mount for right or left hand opening. Lobby enclosures come in several sizes to match individual project requirements.

The **3-CAB5 series** semi-flush or surface mounts. A built in rail assembly provides space for up to five local rail modules, no chassis assembly needed. Back space for 1-1/2 footprints gives room for a power supply and a 1/2 footprint module and 10 AH batteries. The local rail module spaces provide room for amplifiers, common control and annunciation modules.

The **3-CAB7** semi-flush or surface mounts and has a contoured front door with viewing window. Space is provided for two 17 AH batteries and one chassis assembly providing seven local rail module spaces.


The **3-CAB14** semi-flush or surface mounting and has a contoured front door with viewing window. Space is provided for two 17AH batteries and two chassis assemblies each providing seven local rail module spaces.


The **3-CAB21** semi-flush or surface mounts and has a contoured front door with viewing window. Space is provided for two 17AH batteries and three chassis assemblies each providing seven local rail module spaces.


Remote Closet Cabinets

Remote closet cabinets provide an economical way of installing equipment in locations where esthetics are not paramount, like electrical closets. You can have optional display modules used for system diagnostics display mounted behind the front door. These display modules will not be visible with the door closed. Remote closet cabinets are surface mounting and come in sizes providing space for one to three chassis with room for standby batteries. A UL Listed attack rated door having a 2-minute rating is available for the 3-RCC7R cabinet. This door is required for security applications.

Installation and Mounting

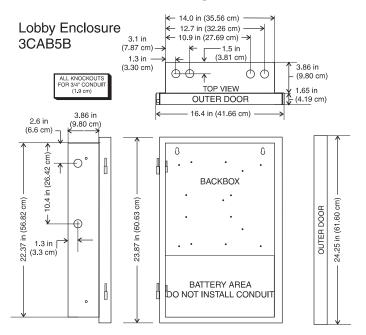

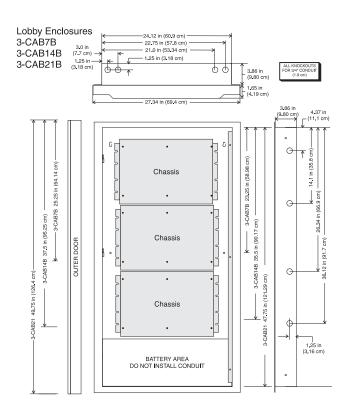

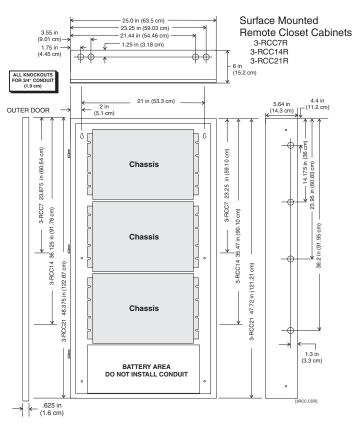

Ordering Information

Catalog Number	Description	Equipment Mounting Space	Battery Space	Ship Wt. lb. (Kg)
Lobby Enclosure	es — Outer doors with viewing window			
3-CAB5	Cabinet w/Wallbox, door and chassis	Five local rail modules One footprint and ½ footprint module	Two - 12V10A	30 (13.6)
3-CAB7B	Wallbox only	One Chassis	F CV0A T 12V10A T 12V17A	30 (13.6)
3-CAB7B-E	Wallbox only, EN54* certified CE	1 Chassis	Four - 6V8A Two - 12V10A Two - 12V17A	30 (13.6)
3-CAB7D(R)	Inner and outer doors for 3-CAB7B		N/A	
3-CAB7D(R)-E	Inner & outer doors for 3-CAB7B, EN54*, CE		N/A	10 (4.5)
3-CAB14B	Wallbox only	Two Chassis	5 61047 4014047 401474	42 (19.1)
3-CAB14B-E	Wallbox only, EN54* certified CE	2 Chassis	Four - 6V8A Two - 12V10A Two - 12V17A	42 (19.1)
3-CAB14D(R)	Inner and outer doors for 3-CAB14B	- N/A		15 (6.8)
3-CAB14D(R)-E	Inner & outer doors for 3-CAB14B, EN54*, CE			15 (6.8)
3-CAB21B	Wallbox only	Three Chassis	Four - 6V8A Two - 12V10A Two - 12V17A	55 (25)
3-CAB21B-E	Wallbox only, EN54* certified CE	3 Chassis	FOUI - 608A 1WO - 12010A 1WO - 12017A	55 (25)
3-CAB21D(R)	Inner and outer doors for 3-CAB21B	N/A		20 (9.1)
3-CAB21D(R)-E	Inner & outer doors for 3-CAB21B, EN54*, CE			20 (9.1)
	nclosure — No viewing window			1
3-RCC7R	Red wallbox and door	One Chassis	Four - 6V8A, Two - 12V10A	37.5 (17)
3-RCC7R-E	Red wallbox and door, EN54* certified CE	0116 01143313	Two - 12V17A, Two - 12V50A	37.5 (17)
ATCK	Attack rated door for 3-RCC7R	N/A		26 (11.8)
3-RCC14R	Red wallbox and door	Two Chassis	5 (1/04	53 (24)
3-RCC14R-E	Red wallbox and door, EN54* certified CE	Two Chassis Four - 6V8A Two - 12V10A, Two - 12V17A		53(24)
3-RCC21R	Red wallhox and door		100 - 120 10A, 100 - 120 1/A	70 (31.8)

Chassis Assemblies

3-RCC21R

3-RCC21R-E

3-CHAS7	Takes one chassis space in wallbox, provides space for 7 local rail modules, up to two power supplies, and a ½ footprint module.	8.4 (3.8)		
3-ASU**	Takes one chassis space in wallbox, provides an audio source unit /w microphone and an inner door filler plate.	15 (6.8)		
3-ASU/4**	Takes one chassis space in wallbox, provides an audio source unit /w microphone and four local rail module spaces.	15 (6.8)		
3-ASU/FT**	Takes one chassis space in wallbox, provides an audio source unit /w microphone and Firefighters Telephone	20 (9.1)		
3-FTCU**	Takes one chassis space in wallbox, provides Firefighters Telephone Control unit and inner door filler plate.	15 (6.8)		

Three Chassis

Accessories		
3-BATS	Battery Shelf for RCC Enclosures. Takes one chassis space. Room for up to one 65 AH or two 50 AH batteries.	3 (1.36)
3-BTSEN	Battery sensor/distribution module	.5 (.2)
3-TAMP	Tamper switch for 3-CAB7, 3-CAB14 and 3-CAB21 cabinets. Mounts to side of cabinet.	.5 (.2)
3-TAMP5	Tamper switch for 3-CAB5. Mounts to side of cabinet.	.5 (.2)
3-TAMPRCC	3-TAMPRCC Tamper Switch for RCC series cabinets. Mounts to side of cabinet	5 (2)

Notes

- 1) All lobby enclosures, wallboxes and doors have a textured gray enamel finish; outer doors are available in red by adding the suffix "R" to the catalog number, i.e. 3-CAB7DR.
- 2) Remote closet cabinets will support 65 AH batteries with the use of the 3-BATS Battery Shelf, which reduces the enclosure's chassis capacity by one chassis.
- 3) The EST3 is modularly listed under the following standards: UL 864 categories: UOJZ, UOXX, UUKL and SYZV, UL 294 category ALVY, UL 609 category AOTX, UL 636 category ANET, UL 1076 category APOU, UL 365 category APAW, UL 1610 category AMCX, UL 1635 category AMCX ULC-S527, ULC-S301, ULC-S303, ULC-S303, ULC-S304, ULC-S306, ULC/ORD-C1076, ULC/ORD-C693 Please refer to EST3 Installation and Service Manual for complete system requirements.

Red wallbox and door

Red wallbox and door, EN54* certified CE

70 (31.8)

70 (31.8)

Two - 12V50A, Two - 12V65²

^{*} EN54-2:1997+A1 and EN54-4:1997+A1:2002+A2 pending

^{**} Add "-CC" for City of Chicago.

GE Security

U.S. T 888-378-2329 F 866-503-3996

Canada T 519 376 2430 F 519 376 7258

Asia T 852 2907 8108 F 852 2142 5063

Australia T 61 3 9259 4700 F 61 3 9259 4799

Europe T 32 2 725 11 20 F 32 2 721 86 13

Latin America T 305 593 4301 F 305 593 4300

www.gesecurity.com/est

© 2006 General Electric Company All Rights Reserved

