


Hello, we use cookies to improve website performance, facilitate information sharing on social media, and offer advertising tailored to your interests. By using our site, you consent to the use of these cookies. You can also customize your browser's cookie settings. For more information, see our [Privacy Statement](#).

[Click here to not show this message again](#)

# Innovation that Endures

- Products
  - Annunciators & Accessories
  - AV Notification
  - Communicators
  - Control Panels (Addressable)
  - Control Panels (Conventional)
  - Devices (Addressable)
  - Devices (Conventional)
  - Mass Notification
  - Power Supplies
  - Pull Stations
  - Releasing Panels
  - Wireless (SWIFT)
- All Products

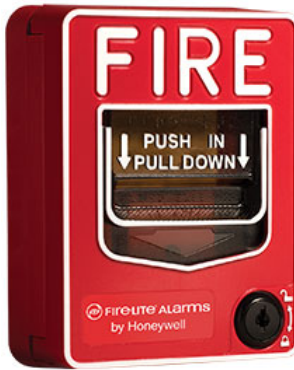

## W-BG12LX(SP) SWIFT Pull Station

The W-BG12LX wireless addressable pull station is a dual-action manual pull station with a key-lock reset feature. Rotary dial switches are provided for setting the pull station's address. The W-BG12LX is marked in English only (Fire) while the W-BG12LXSP is marked in Spanish and English (Fuego/Fire). The W-BG12LX and W-BG12LXSP communicate with the fire alarm control panel (FACP) through a wireless mesh network to the W-GATE wireless gateway. Note: Must be used with an ES-200X, ES-50X, MS-9600(UD)LS or MS-9200UDLS FACP.

[Datasheet](#)  
[Manual](#)  
[Learn more](#)

### Discontinued Products



[Download the ECC APP](#)

[Honeywell Power Products](#)

[Zoom](#)

- [Features & Benefits](#)
- [Accessories](#)
- [Documents](#)
- [Tools](#)
- [Agencies](#)

### W-BG12LX(SP) SWIFT Pull Station Features and Benefits

- Integrated LED display Status
- Cascading Mesh Wireless Technology (902-928 MHz frequency)
- Requires (4) CR-123A batteries (included)
- Compatible with wireless battery cartridge (W-BATCART)