


IP-5IRD2M02MZ-W-FR

2MP Network IR Water-Proof
Dome Camera



- 2MP (1920 × 1080) H.265 full real time coding
- Max. resolution: 1920 × 1080; ICR auto switch, true day / night
- 30 ~ 50m IR night view distance
- Motorized or manual zoom lens optional
- 3D DNR, Digital WDR, HLC, BLC and Defog
- ROI coding
- Hardware reset
- Built-in micro SD card slot, up to 128GB
- DC12V/PoE power supply
- Support smart phone, iPad, remote monitoring
- IP67 ingress protection;
- Support dual streams

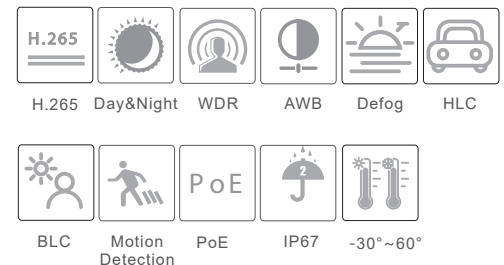

SPECIFICATIONS

Specifications	Model	IP-5IRD2M02MZ-W-FR
Camera		
Image Sensor	1 / 2.7 "CMOS	
Image Size	1920 × 1080	
Electronic Shutter	1 / 25 s ~ 1 / 100000 s	
Iris Type	Fixed Iris	
Min. Illumination	0.005 lux@F1.6, AGC ON; 0 lux with IR 0.0028 lux@F1.2, AGC ON; 0 lux with IR	
Lens	2.8 ~ 12 mm @F1.4, horizontal field of view: 95.4° ~ 35.5°	
Lens Mount	Φ14	
Wide Dynamic Range	Digital WDR	
BLC	Yes	
HLC	Yes	
Defog	Yes	
Digital NR	3D DNR	
Angle Adjustment	Pan: 0°~360°; Tilt: 0°~80°; Rotation: 0°~360°	
Image		
Video Compression	H.265 / H.264 / MJPEG	
H.264 Compression Standard	Baseline Profile/Main Profile/High Profile	
Resolution	1080P (1920 × 1080), 720P (1280 × 720), D1, CIF, 480 × 240	
Main Stream	60Hz : 1080P (1 ~ 30fps) / 720P (1 ~ 30fps) 50Hz : 1080P (1 ~ 25fps) / 720P (1 ~ 25fps)	
Sub Stream	60Hz : D1/CIF/480x240 (1~30fps); 50Hz: D1/CIF/480x240 (1~25fps)	
Bit Rate	128 Kbps ~ 4 Mbps	
Bit Rate Type	VBR / CBR	
Audio Compression	G711A / U	
Image Settings	ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR, etc. adjustable through client software or web browser	
ROI	Each ROI to be configured separately	
Interfaces		
Network	RJ45	
Video Output	NO	
Audio	NO	
Storage	Built-in micro SD card slot; up to 128GB	
Hardware Reset	Yes	
Functions		
Remote Monitoring	Web browsing, CMS remote control	
Online Connection	Support simultaneous monitoring for up to 3 users; Support multi-stream real time transmission	
Network Protocol	UDP, IPv4, IPv6, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, 802.1x, UPnP, HTTPs, QoS	
Interface Protocol	ONVIF, GB-T/28181-2011	
Storage	Network remote storage; micro SD card storage	
Smart Alarm	Motion detection, SD card error, SD card full	
General function	Watermark, IP address filtering, video mask, heartbeat, password protection	
PoE	Yes	
IR Distance	30 ~ 50 m	
Ingress Protection	IP67	
Others		
Power Supply	DC12V/PoE	
Power Consumption	< 9.5W	

Operating Environment	- 30 °C ~ 60 °C (-22°F~140°F) Humidity: less than 95 % (non-condensing)
Dimensions (mm)	Φ 111.5 × 99.6
Weight (net)	Approx. 0.66KG
Installation	Ceiling mounting (wall mounting available with the junction box and bracket)

DIMENSIONS

