


4MP Vandalproof IR Fixed Mini Dome Camera


Specifications

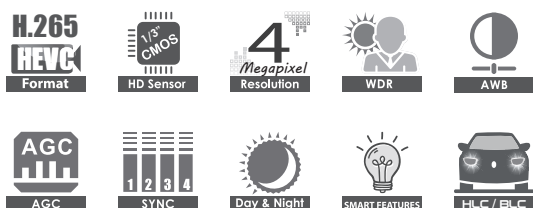

Key Features

- 1/3" HD CMOS Sensor
- Up to 2592 x 1520 resolution, 20fps
- 2.8 / 3.6mm Fixed Lens
- WDR, Smart IR, Distance: 30m
- Audio I/O, ONVIF, Built-In Mic , microSD
- DC12V, PoE
- IP66, IK 10

Dimensions

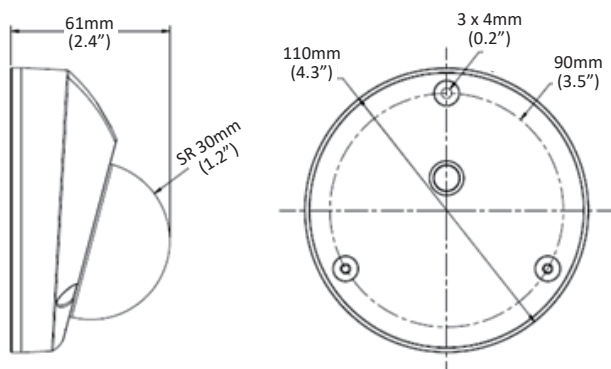

Model	UN-IPC314SRDVPF28		UN-IPC314SRDVPF36
Camera			
Sensor	1/3", 4 megapixel, progressive scan CMOS		
Lens	2.8mm@F2.0	3.6 mm@F2.0	
Angle of View (H)	101.8°	76.8°	
Shutter	Auto/Manual, 1/6~1/100000 s		
Min. Illumination	Colour: 0.02 Lux (F2.0, AGC ON)		
	0 Lux with IR		
Day/Night	IR-cut filter with auto switch (ICR)		
S/N	≥55 dB		
WDR	120 dB		
Video			
Max. Resolution	2592 × 1520		
Video Compression	H.265, H.264, MJPEG		
Frame Rate	4MP (2592×1520): Max. 20 fps; 4MP (2560×1440): Max. 25 fps		
	3MP (2048×1520): Max. 30 fps; 1080P (1920×1080): Max. 30 fps		
Video Streaming	Triple		
9:16 Corridor Mode	Supported		
ROI	Supported		
Evaluative Metering	Supported		
OSD	Up to 8 OSDs		
Privacy Mask	Up to 8 areas		
Smart			
Behavior Detection	Intrusion, crossing line, motion detection		
Exception Detection	Audio detection		
Intelligent Identification	Face detection, Defocus, Scene Change		
Statistical Analysis	People counting		
Storage			
Edge Storage	Micro SD, Up to 128 GB		
Network			
Protocols	L2TP, IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x		
Compatible Integration	ONVIF, API		
Interface			
Audio I/O	Audio cable		
	Input: impedance 35 kΩ; amplitude 2 V [p-p]		
	Output: impedance 600 Ω; amplitude 2 V [p-p]		
	Supported		
Network	10M/100M Base-TX Ethernet		
General			
Power	12 V DC±25%, PoE (IEEE 802.3af)		
	Power consumption: 3~5W		
Dimensions (L x H)	Φ110 x 61 mm (Φ4.3" x 2.4")		
Weight	0.25 kg (0.55 lb)		
Working Environment	-35°C ~ +60°C (-31°F ~ 140°F), Humidity ≤ 95% RH(non-condensing)		
Ingress Protection	IP66		
Vandal Resistant	IK10		