


UN-IPC6222ERX30PB


2MP IR Network PTZ Camera

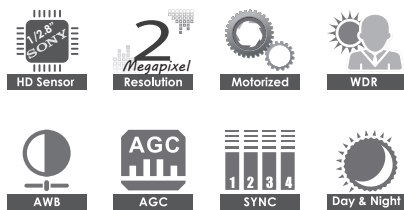

Key Features

- 1/2.8" HD CMOS Sensor
- Up to 1920 × 1080 resolution, 30fps
- 30X Optical Zoom
- DWDR, Smart IR, Distance: 150m
- Alarm I/O, Audio I/O, ONVIF
- AC24V, DC24V, PoE (PSE Required)
- IP66

Dimensions

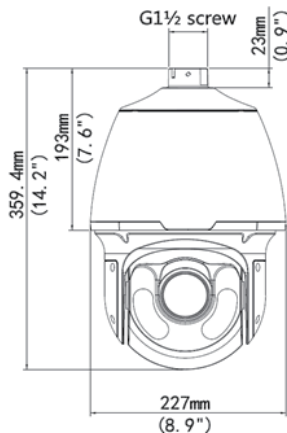

Specifications

Model		UN-IPC6222ERX30PB				
Camera						
Sensor	1/2.8", 2.0 megapixel, progressive scan, CMOS					
Lens	4.5 ~ 135mm, AF automatic focusing and motorized zoom lens					
Digital Zoom	16					
Optical Zoom	30					
DORI Distance	Lens (mm)	Detect (m)	Observe (m)	Recognize (m)	Identify (m)	
	4.5	69.8	27.9	14	7	
	135	2094.8	837.9	419	209.5	
Angle of View (H)	71.7° ~ 2.4°					
Angle of View (V)	43.4° ~ 1.3°					
Angle of View (O)	88.2° ~ 2.8°					
Shutter	Auto/Manual; shutter time: 1 ~ 1/100000s					
Minimum Illumination	Colour: 0.001Lux (F1.5, AGC ON), 0Lux with IR					
Iris	Auto/Manual; F1.5 ~ F4.0					
Day/Night	IR-cut filter with auto switch (ICR)					
Digital noise reduction	2D/3D DNR					
S/N	>52dB					
IR Range	Up to 150m (492ft)					
Defog	Digital Defog					
WDR	120dB					
Video						
Video Compression	Ultra 265, H.265, H.264, MJPEG					
H.264 code profile	Baseline profile, Main Profile, High Profile					
Frame Rate	Main Stream: 2MP (1920*1080), Max 30fps; Sub Stream: 2MP (1920*1080), Max 30fps; Third Stream: D1 (720*576), Max 30fps					
HLC / BLC / EIS	Supported					
OSD	Up to 8 OSDs					
Privacy Mask	Up to 24 areas					
ROI	Up to 8 areas					
Motion Detection	Up to 4 areas					
Smart						
Behavior Detection	Intrusion, cross line, motion detection, auto tracking					
Intrusion	Enter and loiter in a pre-defined virtual region					
cross line	Cross a pre-defined virtual line					
motion detection	Moving within a pre-defined virtual region					
auto tracking	Tracking the specified target					
Recognition	Face detection, Audio detection					
Intelligent Identification	Object Left, Object Moving					
Statistical Analysis	People counting					
General Function	Watermark, IP Address Filtering, Tampering Alarm, Alarm input, Alarm output, Access Policy, ARP Protection, RTSP Authentication, User Authentication					
Audio						
Audio Compression	G.711					
Two-way audio	Supported					
Suppression	Supported					
Sampling Rate	8KHZ					
Storage						
Edge Storage	Micro SD, up to 256GB					
Network Storage	ANR					
Network						
Protocols	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP, QoS					
Compatible	ONVIF (Profile S, Profile G, Profile T), API					
Pan & Tilt						
Pan Range	360° (endless)					
Pan Speed	0.1°/s ~ 240°/s, Preset speed: 300°/s					
Tilt Range	-15° ~ 90° (auto reverse)					
Tilt Speed	0.1° ~ 160°/s, Preset speed: 240°/s					
Number of Presets	1024					
Patrol	Up to 16 patrols, up to 32 presets per patrol Note: The total number of patrols and patterns is 16.					
Home Position	Supported					
Interface						
Audio I/O	Audio cable Input: impedance 35kΩ; amplitude 2V [p-p] Output: impedance 600Ω; amplitude 2V [p-p]					
Alarm I/O	1/1					
Network	1RJ45 10M/100M Base-TX Ethernet					
General						
Power	AC 24V±25%, DC 24V±25%, PoE (PSE Required) Power consumption: 9 ~ 42W					
Dimensions (Ø x H)	Ø227 x 359.4mm (Ø8.9" x 14.2")					
Weight	5.28kg (11.6lb)					
Working Environment	-40°C ~ 65°C (-40°F ~ 149°F), Humidity: ≤95% RH (non-condensing)					
Ingress Protection	IP66					