



Amerex Corporation

"Quality is Behind the Diamond"




Product Catalog

WHERE TO USE

















Amerex manufactures an extensive variety of hand portable and wheeled fire extinguishers, both “compliance” (code required) and “specialty” types. “Specialty” type extinguishers are intended for use on particular types of hazards, so careful attention should be made to locating them in close proximity to the specific hazard they are meant to protect. It is natural for a person to use the extinguisher located nearest to a fire. The most current issue of NFPA-10 should be consulted for minimum recommended fire extinguisher types, placement and travel distances. Your local Amerex Fire Equipment Distributor is professionally equipped to help you evaluate and implement these recommendations.

All “Picture Symbols” are detailed below and should be reviewed with all who might be expected to use a fire extinguisher. Everyone should be familiar with these picture symbols which identify the types of fires on which they may be used. The International sign system **diagonal red slash** indicates a potential danger if the extinguisher is used on that particular type of fire.

TYPES OF FIRES

- CLASS A** **ORDINARY COMBUSTIBLES:**
wood, paper, rubber,
fabrics and many plastics 
- CLASS B** **FLAMMABLE LIQUIDS & GASES:**
gasoline, oils, paint,
lacquer and tar 
- CLASS C** **FIRES INVOLVING
LIVE ELECTRICAL
EQUIPMENT** 
- CLASS D** **COMBUSTIBLE METALS
OR
COMBUSTIBLE METAL ALLOYS
(NO picture symbol)** 
- CLASS K** **FIRES IN COOKING APPLIANCES
THAT INVOLVE COMBUSTIBLE
COOKING MEDIA
vegetable or animal oils and fats** 

TYPES OF EXTINGUISHERS

- CLASS A**   
- CLASS A:B**   
- CLASS A:B:C**   
- CLASS A:C**  
- CLASS B:C**  
- CLASS D** 
- CLASS A:K**  

HOW TO USE

All Amerex extinguishers are furnished with a detailed “Owners Manual” containing valuable information. The manual contains information on the installation, use and maintenance of the extinguisher. The extinguisher nameplate (label) contains specific information on “HOW TO USE” the particular extinguisher. The label instructions vary slightly according to type and size. All potential operators should be totally familiar with the instructions on any extinguisher they might be required to use.



ALL AMEREX FIRE EXTINGUISHERS COMPLY WITH THE RECOMMENDATIONS OF THE NATIONAL FIRE PROTECTION ASSOCIATION AND ARE TESTED AND RATED BY UNDERWRITERS LABORATORIES OR FM GLOBAL TO ANSI / UL STANDARDS. ALL EXTINGUISHER NAMEPLATES CONTAIN THE NECESSARY HMIS INFORMATION TO COMPLY WITH NATIONAL AND LOCAL OSHA REQUIREMENTS.



Amerex Corporation

RUGGED

- 5 Year Manufacturer's Warranty
- Stored Pressure Design
- Polished Stainless Steel Cylinders
- All Metal Valve Construction
- Exclusive crevice free, butt welded cylinders
- Temperature Range +40°F to 120°F

CLEAN

- Leaves no powder residue

USER FRIENDLY

- Maximum visibility during discharge
- Large Loop Stainless Steel Pull Pin
- Bar Coded and Bi-lingual Labels



Model
240



Model
254

Model
252
250



AVAILABLE IN A 33 GAL. FFFP WHEELED EXTINGUISHER OR STATIONARY UNIT

Model 240 utilizes the cooling, soaking and penetrating effect of a 45-55 ft. stream of WATER. The 55 sec. discharge time makes it very effective for inexperienced operators for use on Class A fires.

Model 254 AFFF FOAM unique 6 liter size fills many requirements for a lighter, more compact Class A:B extinguisher. Easy and effective application with the spray nozzle. Apply to Class B liquid spills to prevent ignition. Ideal for emergency first response vehicles.

Model 252 FFFP FOAM adds Class B fire fighting capability to the Class A effectiveness of this extinguisher. The Alcohol Resistant fire fighting agent is effective on fires in a wide variety of Class B materials such as alcohols, polar solvents, hydrocarbons and combinations such as gasohol. Apply to a non-ignited Class B liquid spill and it will seal the surface minimizing the chance of serious fire.

Model 250 AFFF FOAM Class A:B extinguisher. Easy and effective application with air aspirated nozzle. Apply to Class B liquid spills to prevent ignition. Ideal for emergency first response vehicles.

The model 240 may be freeze protected to -40°F by adding a Model 506 Anti-Freeze charge

| AGENT TYPE | WATER | AFFF FOAM | | FFFP FOAM |
|---------------------------|---------------|---------------------|-------------|-----------------------------|
| DESIGN | HOSE & NOZZLE | HOSE & SPRAY NOZZLE | | HOSE & AIR ASPIRATED NOZZLE |
| MODEL NUMBER | 240 | 254 | 250 / 250CG | 252 |
| UL RATING | 2A | 2A:10B | 3A:20B | 3A:20B |
| CAPACITY | 2.5 GAL | 6 LITER | 2.5 GAL | 2.5 GAL |
| SHIPPING WT. (LBS. EMPTY) | 7.5 | 7.5 | 11 | 11 |
| HEIGHT (IN.) | 24.5 | 19 | 24.5 | 24.5 |
| WIDTH (IN.) | 9 | 8 | 9 | 9 |
| DEPTH (IN.) | 7 | 7 | 7 | 7 |
| RANGE (INITIAL- FT) | 45-55 | 10-12 | 10-12 | 10-15 |
| FM APPROVED | YES | | YES | |
| DISCHARGE TIME (SEC.) | 55 | 30 | 55 | 55 |
| INCLUDED BRACKET | WALL | WALL | WALL | WALL |

**Manufactured and Tested to ANSI/UL Standards
Complies with NFPA 10 Standard
ISO-9001 / ISO-14001 Certified
UL LISTED**

CONFORMS TO TEST STANDARDS:

WATER: CAN/ULC-S507 - ANSI/UL626 & CAN/ULC-S508 - ANSI/UL711

FOAM: CAN/ULC-S554 - ANSI/UL8 & CAN/ULC-S508 - ANSI/UL711

MADE IN U.S.A.



Amerex Corporation

RUGGED

- 5 Year Manufacturer's Warranty
- Stored Pressure Design
- Polished Stainless Steel Cylinders
- All Stainless Steel Valve Construction
- Exclusive Crevice Free, Butt Welded Cylinder
- Tested on Commercial Deep Fat Fryers to ANSI / UL 711 Test Protocol and Safe to Use on Class C Fires
- Class 2A Rated to Meet Fire Code Occupancy Hazard Requirements
- Temperature Range +40°F to 120°F

USER FRIENDLY

- Factory Charged
- Large Loop Stainless Steel Pull Pin
- Swivel Connection on Hose Allows Nozzle to be Oriented for Proper Use
- Nozzle Grip Design with 45° Angle for Easy "Overhead" Application
- Agent Discharged as a Fine Mist Helps Prevent Grease Splash and Re-flash While Cooling the Appliance
- Precise Extinguishing Agent Application
- Bar Coded and Bi-lingual Labels

OPTION

- USCG Approved with Bracket Listed on UL Label



B260

B262



Coast Guard Approved

B260CG B262CG

MUST USE 810CG BRACKET

*(Sold Separately)



WET CHEMICAL extinguishers are the best restaurant kitchen appliance hand portable fire extinguishers you can purchase. Each model has been tested and approved for the Class K listing by UL specifically for restaurant kitchen hazards. They contain a special potassium acetate based agent. The recent trend to more efficient cooking appliances and use of vegetable based cooking oils dictates the use of a hand portable fire extinguisher with greater fire fighting capacity and cooling effect to combat these very hot and difficult fires. Available in two sizes - 6 liter or 2½ gal. - with attractive stainless steel cylinders and easy to use hose and spray application nozzle. The superior fire fighting capability of the Wet Chemical agent is placed exactly where you aim it with no chemical residue to clean up. The Models B260 and B262 are the ideal "KITCHEN USE" fire extinguishers. They supplement existing cooking equipment automatic system protection for an extra margin of safety.

Excellent for use on all cooking appliances including solid fuel charbroilers

| AGENT TYPE | WET CHEMICAL | | | |
|-----------------------|---------------------|---------|---------|---------|
| DESIGN | HOSE & SPRAY NOZZLE | | | |
| MODEL NUMBER | B260 | B262 | B260CG | B262CG |
| UL RATING | 2A-K | | 2A-K | |
| CAPACITY | 6 LITER | 2.5 GAL | 6 LITER | 2.5 GAL |
| SHIPPING WT. (LBS.) | 22.5 | 33.5 | 22.5 | 33.5 |
| HEIGHT (IN.) | 19 | 24.5 | 19 | 24.5 |
| WIDTH (IN.) | 9 | 9 | 9 | 9 |
| DEPTH (IN.) | 7 | 7 | 7 | 7 |
| RANGE (INITIAL- FT) | 10-12 | 10-12 | 10-12 | 10-12 |
| FM APPROVED | | YES | | YES |
| DISCHARGE TIME (SEC.) | 53 | 107 | 53 | 107 |
| INCLUDED BRACKET | WALL | WALL | WALL | WALL |

Complies with NFPA 10 Standard
ISO-9001 and ISO-14001 Certified
UL LISTED

CONFORMS TO TEST STANDARDS:

CAN/ULC-S554 - ANSI/UL 8 &
CAN/ULC-S508 - ANSI/UL 711

MADE IN U.S.A.



Amerex Corporation

RUGGED

- 5 Year Manufacturer's Warranty
- Stored Pressure Design
- Stainless Steel Cylinders
- Durable High Gloss Polyester Powder Paint
- All Metal Valve Construction
- Exclusive Crevice Free, Butt Welded Cylinder
- Temperature Range +40°F to 120°F

MRI SAFE

- Nonmagnetic Construction Tested by an Independent Agency for use in MRI Facilities to 7 Tesla (including wall hanger bracket)

CLEAN

- Non-toxic - Causes no Respiratory Problems
- De-ionized Water Extinguishing Agent (sold separately)
- Sanitary White Paint Finish (easy to clean)
- No Powder Residue

USER FRIENDLY

- Wand Provides Greatest Operator Safety
- Large Loop Stainless Steel Pull Pin
- Maximum Visibility During Discharge
- No Electrical Conductivity Back to the Operator
- No Thermal or Static Shock
- Minimal Training - Simplest to use
- Most Economical Agent Available
- Bar Coded and Bi-lingual Labels

OPTION

- USCG Approved with Bracket Listed on UL Label
- Available with Polished Stainless Steel Cylinders



B270NM

B272NM



NONMAGNETIC

Tested to ANSI/UL 711
for Class C Listing

WATER MIST is the ultimate extinguisher for Class A fires and where a potential Class C (electrical) hazard exists. The fine spray from the unique misting nozzle provides safety from electrical shock, greatly enhances the cooling and soaking characteristics of the agent and reduces scattering of burning materials. The Amerex Water Mist extinguishers contain de-ionized water (sold separately) making them the best extinguishers for protection of hospital environments, valuable books and documents, telecommunication facilities and "clean room" manufacturing facilities. The Amerex Water Mist extinguishers are easy to use, maintain, and service.

Safe to use in MRI facilities and on energized equipment

| AGENT TYPE | DE-IONIZED WATER | |
|---|------------------|---------|
| | HOSE & WAND | |
| DESIGN | HOSE & WAND | |
| MODEL NUMBER | B270NM | B272NM |
| UL RATING | 2A:C | 2A:C |
| CAPACITY | 1.75 GAL | 2.5 GAL |
| SHIPPING WT. (LBS. EMPTY) | 7 | 8 |
| HEIGHT (IN.) | 19 | 24.5 |
| HEIGHT WITH HOSE AND WAND INSTALLED (IN.) | 24.5 | 27.5 |
| WIDTH (IN.) | 11 | 11 |
| DEPTH (IN.) | 7 | 7 |
| RANGE (INITIAL- FT) | 10-12 | 10-12 |
| DISCHARGE TIME (SEC.) | 72 | 80 |
| INCLUDED BRACKET | NM WALL | NM WALL |

Manufactured and Tested to ANSI/UL Standards
Complies with NFPA 10 Standard
ISO-9001 / ISO-14001 Certified
UL LISTED

CONFORMS TO TEST STANDARDS:

CAN/ULC-S554 - ANSI/UL8 &
CAN/ULC-S508 - ANSI/UL711

MADE IN U.S.A.



Amerex Corporation

RUGGED

- 5 Year Manufacturer's Warranty
- Stored Pressure Design
- Dependable Drawn Steel Cylinders
- Durable High Gloss Polyester Powder Paint
- All Metal Valve Construction
- Temperature Range -40°F to 120°F

ENVIRONMENTALLY ACCEPTABLE

- EPA approved "Clean Agent" for Class A, B and C hazards
- Low GWP (Global Warming Potential)
- Low ODP (Ozone Depletion Potential)
- Short Atmospheric Lifetime

CLEAN

- Leaves No Residue

USER FRIENDLY

- Maximum Visibility During Discharge
- Large Loop Pull Pin
- No Electrical Conductivity Back to the Operator
- No Thermal or Static Shock
- Bar Coded and Bi-lingual Labels

OPTION

- 5 lb., 11 lb. and 15 ½ lb. Extinguishers are USCG Approved with Bracket Listed on UL Label



Aluminum Valve
A384T
B385TS
B386T
B394TS



Brass Valve
397
398



AVAILABLE IN WHEELED EXTINGUISHERS

Halotron™ I clean fire extinguishing agent discharges as a rapidly evaporating liquid, which is non-conductive, non-corrosive, and leaves behind no residue. Halotron™ I is the clean agent market leader with a history of successful real-world protection of valuable assets. From model scale aircraft to wide body commercial aircraft, from data centers to pharmaceutical and other industrial plants, the Halotron™ I agent has been used to extinguish the fire, limit damage and help reduce downtime that can be caused by other agents. The Halotron™ I clean agent has been determined to be the most environmentally beneficial halocarbon agent on the market today that meets wide performance standards. The primary raw material in the agent is HCFC-123, which has an outstanding profile of near-zero ozone depleting potential (0.0098, CFC-11=1.0) and a low global warming potential (77, 100 yr. CO2 time horizon). State of the art atmospheric modeling completed in 2009 describes the smaller environmental footprint than HFC-based agents available for portable extinguishers. Ideal applications for these extinguishers include: data centers, laboratories, manufacturing plants, general office areas, computer rooms, telecommunication facilities, clean rooms, control rooms, warehouses, military electronics, vehicles including classic autos, boats, engine compartments, aircraft ramps, onboard aircraft and in facilities that service aircraft and any facility where dry chemical extinguishers could cause unacceptable damage or contamination.

FAA Approved Models Available (See Chart Below)

| AGENT TYPE | HALOTRON™ I | | | | | |
|---|-------------------|---------|---------|----------|---------------|----------|
| | ANODIZED ALUMINUM | | | | CHROMED BRASS | |
| DESIGN | NOZZLE | | | | HOSE & NOZZLE | |
| MODEL NUMBER | A384T | B385TS | B386T | B394TS | 397 | 398 |
| UL & ULC RATING | 1B:C | 2B:C | 5B:C | 5B:C | 1A:10B:C | 2A:10B:C |
| CAPACITY (LBS.) | 1.4 | 2.5 | 5 | 5.5 | 11 | 15.5 |
| SHIPPING WT. (LBS.) | 3.25 | 5.25 | 9.5 | 10 | 22.5 | 27.5 |
| HEIGHT (IN.) | 10 | 15.5 | 15.25 | 15 | 21.88 | 21.88 |
| WIDTH (IN.) | 3.5 | 6.38 | 5.75 | 5.13 | 9.25 | 9.25 |
| DEPTH (IN.) | 2.63 | 3 | 4.25 | 4.25 | 6 | 6 |
| RANGE (INITIAL-FT) | 6-8 | 6-8 | 9-15 | 9-15 | 9-15 | 12-18 |
| DISCHARGE TIME (SEC.) | 9 | 9 | 9 | 9 | 9 | 14 |
| FM APPROVED | | | | YES | YES | YES |
| OPTIONAL CHROME CYLINDER | YES | YES | YES | | | |
| MINIMUM CONFINED SPACE REQUIREMENTS (CU. FT.) | 196 | 350 | 700 | 770 | 1540 | 2170 |
| FAA APPROVED MODEL | | | | YES | YES | YES |
| INCLUDED BRACKET | VEHICLE | VEHICLE | VEHICLE | AIRCRAFT | WALL | WALL |

Manufactured and Tested to ANSI/UL Standards
Complies with NFPA 10 Standard
ISO-9001/ ISO-14001 Certified
UL LISTED

CONFORMS TO TEST STANDARDS:

CAN/ULC-S556 - ANSI/UL2129 &
CAN/ULC-S508 - ANSI/UL711

MADE IN U.S.A.



Amerex Corporation

RUGGED

- 1 Year Manufacturer's Warranty
- Stored Pressure Design
- Dependable Drawn Steel Cylinders
- Durable High Gloss Polyester Powder Paint
- All Metal Valve Construction
- Temperature Range -40°F to 120°F

CLEAN

- Leaves no residue
- Reclaimed Halon 1211 is Restored to Original Military Specification
- Uses All Recycled Gas in Accordance With The Montreal Protocol

USER FRIENDLY

- Maximum Visibility During Discharge
- Large Loop Pull Pin
- No Electrical Conductivity Back to the Operator
- No Thermal or Static Shock
- Bar Coded and Bi-lingual Labels

OPTION

- USCG Approved with Bracket Listed on UL Label (except model A344T)

HALON 1211 is a liquified gas, pressurized with nitrogen, which discharges as a vapor causing no cold or static shock and no impairment of the operator's vision. This "CLEAN" agent quickly penetrates difficult to see and hard to reach areas and leaves no residue. It is recommended for protection of delicate, sensitive and expensive computers, electrical equipment, tapes and film, automotive and aircraft engines, laboratory chemicals and equipment.

Quality industrial grade hardware, "CLEAN" agent, light weight, good discharge range and excellent fire extinguishing ability.

Aluminum Valve

A344T
C352TS
B355T



C354TS

Brass Valve

B369
B371
361



Recycled gaseous agent certified to meet military specifications

| AGENT TYPE | HALON 1211 | | | | | | |
|--------------------------------------|-------------------|----------|----------|---------|---------------------|----------|----------|
| | ANODIZED ALUMINUM | | | | CHROME PLATED BRASS | | |
| VALVE TYPE | NOZZLE | | HOSE | NOZZLE | HOSE | | |
| DESIGN | | | | | | | |
| MODEL NUMBER | A344T | * C352TS | * C354TS | B355T | B369 | B371 | 361 |
| UL & ULC RATING | 2B:C | 5B:C | 5B:C | 10B:C | 1A:10B:C | 2A:40B:C | 4A:80B:C |
| CAPACITY (LBS.) | 1.25 | 2.5 | 3 | 5 | 9 | 13 | 17 |
| SHIPPING WT. (LBS.) | 2.75 | 5.5 | 6 | 9.75 | 16.75 | 22 | 36.25 |
| HEIGHT (IN.) | 10 | 14.38 | 14.38 | 15.25 | 16.25 | 20.25 | 24 |
| WIDTH (IN.) | 3.63 | 4.5 | 6 | 5.75 | 8.5 | 8.5 | 9.75 |
| DEPTH (IN.) | 2.63 | 3 | 3 | 4.25 | 5 | 5 | 7 |
| RANGE (INITIAL- FT) | 9-12 | 9-15 | 9-15 | 9-15 | 12-18 | 12-18 | 12-18 |
| DISCHARGE TIME (SEC.) | 10 | 10 | 12 | 10 | 9 | 14 | 22 |
| OPTIONAL CHROME CYLINDER | YES | YES | YES | YES | YES | YES | |
| MINIMUM SPACE REQUIREMENTS (CU. FT.) | 156 | 312 | 375 | 624 | 1123 | 1622 | 2120 |
| INCLUDED BRACKET | VEHICLE | AIRCRAFT | AIRCRAFT | VEHICLE | WALL | WALL | WALL |

* SPECIAL VALVE DESIGN FOR AIRCRAFT INSTALLATIONS

Manufactured and Tested to
ANSI/UL Standards
Complies with NFPA 10 Standard
ISO-9001/ ISO-14001 Certified
UL LISTED

CONFORMS TO TEST STANDARDS:

UL-1093 - ANSI/UL711

MADE IN U.S.A.

HALON 1211



Amerex Corporation

RUGGED

- 5 Year Warranty
- All Metal Valve Construction
- Rust free aluminum cylinders
- Durable High Gloss Polyester Powder Paint
- Temperature Range -22°F to 120°F

USER FRIENDLY

- Meets Many Hospital Medical Equipment Requirements
- Large Loop Stainless Steel Pull Pin
- Model 322NM Independently Tested and Approved for use in MRI Facilities to 7 Tesla
- Model 322NM Has Sanitary White Paint Finish (easy to clean)
- Bar Coded and Bi-lingual Labels

OPTION

- USCG Approved with Bracket Listed on UL Label



MODELS

| | |
|-----|-----|
| 322 | 330 |
| 331 | 332 |



Also available in 50 / 100 lb. wheeled extinguishers and 100 lb. stationary.

**Model 322NM
NONMAGNETIC
MRI SAFE TO 7 TESLA**
(USES 17737 WALL HANGER - INCLUDED)



CARBON DIOXIDE is discharged as a white cloud of “snow” which smothers a fire by eliminating oxygen. It is effective for Class B flammable liquids and is electrically non-conductive. Carbon Dioxide is a clean, non-contaminating, odorless gas.

Nonmagnetic model available (Model 322NM - tested to 7 Tesla)

| AGENT TYPE | CARBON DIOXIDE | | | | |
|-----------------------|---------------------|---------|-------------|-------|-------|
| VALVE TYPE | CHROME PLATED BRASS | | | | |
| DESIGN | HORN | | HOSE & HORN | | |
| MODEL NUMBER | 322 | 322NM | 330 | 331 | 332 |
| UL RATING | 5B:C | 5B:C | 10B:C | 10B:C | 10B:C |
| CAPACITY (LBS.) | 5 | 5 | 10 | 15 | 20 |
| SHIPPING WT. (LBS.) | 14 | 14 | 28.25 | 37.75 | 50.75 |
| HEIGHT (IN.) | 17.75 | 17.75 | 24 | 30 | 30 |
| WIDTH (IN.) | 8.25 | 8.25 | 12 | 12 | 13 |
| DEPTH (IN.) | 5.25 | 5.25 | 7 | 7 | 8 |
| RANGE (INITIAL- FT) | 3-8 | 3-8 | 3-8 | 3-8 | 3-8 |
| DISCHARGE TIME (SEC.) | 10 | 10 | 10 | 12.5 | 19 |
| FM APPROVED | YES | YES | YES | YES | YES |
| INCLUDED BRACKET | WALL | NM WALL | WALL | WALL | WALL |

**Manufactured and Tested to ANSI/UL Standards
Complies with NFPA 10 Standard
ISO-9001 / ISO-14001 Certified
UL LISTED**

CONFORMS TO TEST STANDARDS:

CAN/ULC-S503 - ANSI/UL154 &
CAN/ULC-S508 - ANSI/UL711

MADE IN U.S.A.



Amerex Corporation

RUGGED

- 6 Year Warranty
- Stored Pressure Design
- Dependable Drawn Steel Cylinders
- Special corrosion resistant yellow
- (Class D) color coded paint finish
- All Metal Valve Construction
- Temperature Range -40°F to 120°F

USER FRIENDLY

- Unique “soft flow” extension applicator plus built in long range nozzle
- Large Loop Stainless Steel Pull Pin
- Bar Coded and Bi-lingual Labels



MODELS

- B570
- B571



The Amerex “soft flow” extension applicator is particularly suited for fighting Class D fires. It keeps the operator away from the extreme heat and toxic fumes caused by burning material. The easily controlled, even discharge provides a non-dispersing application of the agent. The applicator may be quickly detached to provide a straight stream of chemical where greater range, a narrow discharge pattern or a lobbing effect is required.

MODEL B570 contains a special blended Sodium Chloride based dry powder extinguishing agent. Heat from the fire causes it to cake and form a crust excluding air and dissipating heat from burning metal. Metal fires involving magnesium, sodium, potassium and sodium-potassium alloys can be successfully extinguished with this extinguisher. There is data showing that zirconium, uranium, titanium, and powdered aluminum fires can be controlled and extinguished with this unique extinguisher.

Extinguishing Capacity

- Magnesium Chips: 4 ft² and/or 6 lbs. of metal
- Sodium or Potassium Spill: 5 ft² and/or 5 lbs. of metal
- Sodium or Potassium Spill Depth Over 1/2": 3 ft² and or 6 lbs. of metal
- Sodium Potassium Alloy Spil: 3 ft² and/or 2 lbs. of metal

Available in 150 lb. Wheeled or Stationary

MODEL B571 contains a copper extinguishing agent specially developed by the U.S. Navy for fighting lithium and lithium alloy fires. The copper compound smothers the fire and provides an excellent heat sink for dissipating heat. Copper powder has been found to be superior to all other known fire extinguishing agents for lithium.

Extinguishing Capacity

4 ft² and/or 5 lbs. of lithium

Available in 250 lb. Wheeled

OPTIONAL MODEL 859 DOLLY CART PROVIDES FOR EASY TRANSPORT

For Combustible Metal Fires

| AGENT TYPE | SODIUM CHLORIDE | COPPER |
|-----------------------|--------------------------------|--------|
| VALVE TYPE | CHROME PLATED BRASS | |
| DESIGN | HOSE & HORN OR WAND APPLICATOR | |
| MODEL NUMBER | B570 | B571 |
| CAPACITY (LBS.) | 30 | 30 |
| SHIPPING WT. (LBS.) | 53 | 53 |
| HEIGHT (IN.) | 35 | 35 |
| WIDTH (IN.) | 13 | 13 |
| DEPTH (IN.) | 8 | 8 |
| RANGE (INITIAL- FT) | 3-6 | 3-6 |
| DISCHARGE TIME (SEC.) | 24 | 18 |
| FM APPROVED | YES | YES |
| INCLUDED BRACKET | WALL | WALL |

Manufactured and Tested to ANSI/UL Standards
 Complies with NFPA 10 Standard
 ISO-9001 / ISO-14001 Certified
FM APPROVED

CONFORMS TO TEST STANDARDS:

CAN/ULC-S504 - ANSI/UL299 &
 CAN/ULC-S508 - ANSI/UL711

MADE IN U.S.A.



Amerex Corporation

RUGGED

- 6 Year Warranty
- Stored Pressure Design
- Dependable Drawn Steel Cylinders
- Durable High Gloss Polyester Powder Paint
- All Metal Valve Construction
- Temperature Range -65°F to 120°F

USER FRIENDLY

- Easy and More Economical to Maintain and Service
- Large Loop Pull Pin
- Bar Coded and Bi-lingual Labels

OPTION

- USCG Approved with Bracket Listed on UL Label



Aluminum Valve
 B417/T
 B500/T
 B402/T
 B443
 B456
 A411



Brass Valve
 B424
 B461
 B441
 423



Available in Wheeled and Stationary Extinguishers

ABC or Multi-Purpose extinguishers utilize a specially fluidized and siliconized mono ammonium phosphate dry chemical. It chemically insulates Class A fires by melting at approximately 350°F and coats surface to which it is applied. It smothers and breaks the chain reaction of Class B fires and will not conduct electricity back to the operator.

Largest selection of size and extinguisher options available

| AGENT TYPE | | ABC DRY CHEMICAL | | | | | | | | | |
|--------------------------|-------------------|------------------|------------|----------|----------|---------------|---------------------|----------|----------|------------|--|
| VALVE TYPE | ANODIZED ALUMINUM | | | | | | CHROME PLATED BRASS | | | | |
| DESIGN | NOZZLE | HOSE & NOZZLE | | | | HOSE & NOZZLE | | | | | |
| MODEL NUMBER | B417/B417T | B500/B500T | B402/B402T | B443 | B456 | A411 | B424 | B461 | B441 | 423 | |
| UL & ULC RATING | 1A:10B:C | 2A:10B:C | 3A:40B:C | 3A:40B:C | 4A:80B:C | 10A:120B:C | 2A:10B:C | 3A:40B:C | 4A:80B:C | 10A:120B:C | |
| CAPACITY (LBS.) | 2.5 | 5 | 5 | 6 | 10 | 20 | 5 | 6 | 10 | 20 | |
| SHIPPING WT. (LBS.) | 5.25/5.5 | 9.25/9.5 | 9.25/9.5 | 12.75 | 18 | 38 | 10.5 | 13.75 | 19 | 39 | |
| HEIGHT (IN.) | 15.5 | 15.25 | 15.25 | 16 | 20 | 24 | 15.5 | 16.25 | 20.5 | 24 | |
| WIDTH (IN.) | 5.75 | 7.25 | 7.25 | 7.75 | 7.75 | 10.25 | 8 | 8.5 | 8.75 | 10.25 | |
| DEPTH (IN.) | 3 | 4.25 | 4.25 | 5 | 5 | 7 | 4.25 | 5 | 5 | 7 | |
| RANGE (INITIAL- FT) | 9-15 | 12-18 | 12-18 | 15-21 | 15-21 | 15-21 | 12-18 | 15-21 | 15-21 | 15-21 | |
| DISCHARGE TIME (SEC.) | 10 | 14 | 14 | 14.5 | 20 | 30 | 14 | 14 | 20 | 30 | |
| FM APPROVED | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | |
| OPTIONAL CHROME CYLINDER | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES | |
| INCLUDED BRACKET | WALL/VEHICLE | | | WALL | WALL | | WALL | | | | |

Manufactured and Tested to ANSI/UL Standards
 Complies with NFPA 10 Standard
 ISO-9001 / ISO-14001 Certified
UL LISTED

CONFORMS TO TEST STANDARDS:

CAN/ULC-S504 - ANSI/UL299 &
 CAN/ULC-S508 - ANSI/UL711

MADE IN U.S.A.



Amerex Corporation

RUGGED

- 6 Year Warranty
- Stored Pressure Design
- Dependable Drawn Steel Cylinders
- Durable High Gloss Polyester Powder Paint
- All Metal Valve Construction
- Temperature Range -65°F to 120°F

USER FRIENDLY

- Easy and More Economical to Maintain and Service
- Large Loop Pull Pin
- Bar Coded and Bi-lingual Labels

OPTION

- USCG Approved with Bracket Listed on UL Label



Aluminum Valve
 A620T
 B403/T
 B409T
 B453
 B457
 A412



Brass Valve
 B462
 B447
 408



Available in Wheeled and Stationary Extinguishers

REGULAR extinguishers contain a siliconized sodium bicarbonate based dry chemical with free flowing and non-caking additives. Economical Class B & C protection with lower initial cost and recharging. This chemical smothers fires in flammable liquids and pressurized gases and will not conduct electricity back to the operator.

Largest selection of size and extinguisher options available

| AGENT TYPE | REGULAR DRY CHEMICAL | | | | | | | | |
|--------------------------|----------------------|--------------|---------|---------------|-------|---------------------|-------|-------|--------|
| VALVE TYPE | ANODIZED ALUMINUM | | | | | CHROME PLATED BRASS | | | |
| DESIGN | NOZZLE | | | HOSE & NOZZLE | | | | | |
| MODEL NUMBER | A620T | B403/B403T | B409T | B453 | B457 | A412 | B462 | B447 | 408 |
| UL & ULC RATING | 2B:C | 10B:C | 10B:C | 40B:C | 60B:C | 120B:C | 40B:C | 60B:C | 120B:C |
| CAPACITY (LBS.) | 1 | 2.5 | 5 | 5.5 | 10 | 20 | 6 | 10 | 20 |
| SHIPPING WT. (LBS.) | 2.5 | 5.5 | 9.25 | 9.75 | 18 | 38 | 13.75 | 19 | 39 |
| HEIGHT (IN.) | 10 | 15.5 | 15.25 | 15.25 | 20 | 24 | 16.25 | 20.25 | 24 |
| WIDTH (IN.) | 3.5 | 5.75 | 5.5 | 7.25 | 7.75 | 10.25 | 8.5 | 8.75 | 10.25 |
| DEPTH (IN.) | 2.63 | 3 | 4.25 | 4.25 | 5 | 7 | 5 | 5 | 7 |
| RANGE (INITIAL- FT) | 5-8 | 9-15 | 12-18 | 12-18 | 15-21 | 15-21 | 15-21 | 15-21 | 15-21 |
| DISCHARGE TIME (SEC.) | 10 | 10 | 10 | 14 | 18 | 28 | 14 | 18 | 28 |
| FM APPROVED | | YES | YES | YES | YES | YES | YES | YES | YES |
| OPTIONAL CHROME CYLINDER | YES | YES | YES | YES | YES | | YES | YES | |
| INCLUDED BRACKET | VEHICLE | WALL/VEHICLE | VEHICLE | | | | WALL | | |

Manufactured and Tested to ANSI/UL Standards
 Complies with NFPA 10 Standard
 ISO-9001 / ISO-14001 Certified
 UL LISTED

CONFORMS TO TEST STANDARDS:

CAN/ULC-S504 - ANSI/UL299 &
 CAN/ULC-S508 - ANSI/UL711

MADE IN U.S.A.

REGULAR DRY CHEMICAL



Amerex Corporation

RUGGED

- 6 Year Warranty
- Stored Pressure Design
- Dependable Drawn Steel Cylinders
- Durable High Gloss Polyester Powder Paint
- All Metal Valve Construction
- Temperature Range -65°F to 120°F

USER FRIENDLY

- Easy and More Economical to Maintain and Service
- Large Loop Pull Pin
- Bar Coded and Bi-lingual Labels

OPTION

- USCG Approved with Bracket Listed on UL Label



Aluminum Valve
B410T
B479/T
A413



Brass Valve
B460
415



Available in Wheeled and Stationary Extinguishers

PURPLE K extinguishers contain specially fluidized and siliconized potassium bicarbonate dry chemical which is particularly effective on Class B flammable liquids and pressurized gases. It is electrically non-conductive. Purple K has been the choice of oil, gas, chemical and utilities industries as the preferred fire fighting agent.

Largest selection of size and extinguisher options available

| AGENT TYPE | PURPLE K DRY CHEMICAL | | | | |
|--------------------------|-----------------------|-------------------|---------------|---------------------|--------|
| | VALVE TYPE | ANODIZED ALUMINUM | | CHROME PLATED BRASS | |
| DESIGN | | NOZZLE | HOSE & NOZZLE | | |
| MODEL NUMBER | B410T | B479/B479T | A413 | B460 | 415 |
| UL & ULC RATING | 10B:C | 30B:C | 120B:C | 80B:C | 120B:C |
| CAPACITY (LBS.) | 2.5 | 5 | 20 | 10 | 20 |
| SHIPPING WT. (LBS.) | 5.5 | 9.5 | 38 | 19 | 39 |
| HEIGHT (IN.) | 15.5 | 15.25 | 24 | 20.5 | 24 |
| WIDTH (IN.) | 5.75 | 7.25 | 10.25 | 8.75 | 10.25 |
| DEPTH (IN.) | 3 | 4.25 | 7 | 5 | 7 |
| RANGE (INITIAL- FT) | 9-15 | 12-18 | 15-21 | 15-21 | 15-21 |
| DISCHARGE TIME (SEC.) | 10 | 12 | 28 | 22 | 28 |
| FM APPROVED | YES | | YES | YES | YES |
| OPTIONAL CHROME CYLINDER | YES | YES | | YES | |
| INCLUDED BRACKET | VEHICLE | WALL/VEHICLE | | WALL | |

Manufactured and Tested to ANSI/UL Standards
Complies with NFPA 10 Standard
ISO-9001 / ISO-14001 Certified
UL LISTED

CONFORMS TO TEST STANDARDS:

CAN/ULC-S504 - ANSI/UL299 &
CAN/ULC-S508 - ANSI/UL711



Amerex Corporation

HIGH PERFORMANCE
Dry Chemical



RUGGED

- 12 Year Warranty
- Hot Dip Galvanized Drawn Steel Cylinders
- High Gloss Polyester Powder Paint (Best corrosion protection available)
- All Metal Valve Construction
- Gauge Guards
- Protective Rubber Foot Rings
- Superior Range (Vertical & Horizontal)
- High (240 PSI) Operating Pressure
- Temperature Range -65°F to 120°F

CHOICE OF CHEMICALS:

ABC Multi Purpose, Regular, Purple K

SELECT FAST FLOW FOR:

- High Flow Rate
- Fast Discharge
- Quicker Knockdown
- More Operator Protection

SELECT COMPLIANCE FLOW FOR:

- Long Range
- Highest UL Ratings

USER FRIENDLY

- Wide Grip Allows Clearance for Gloved Hand
- Large Loop Stainless Steel Pull Pin
- Bar Coded and Bi-lingual Labels

OPTION

- USCG Approved with Bracket Listed on UL Label
- Hot dip galvanized USCG brackets available

Fast Flow

- 594
- 581
- 567
- 582
- 568
- 595
- 580
- 584
- 569

Compliance Flow

- 592
- 564
- 589
- 599
- 566
- 591



Available in 125 and 250 lb. Wheeled and Stationary extinguishers

HIGH PERFORMANCE extinguishers are the ultimate choice in fire extinguishers for high hazard, frequent use and extreme environment applications. Economical - less initial cost, lower maintenance costs and greater reliability than cartridge operated extinguishers.

Lower initial cost and lower costs to maintain

| AGENT TYPE | ABC DRY CHEMICAL | | | REGULAR DRY CHEMICAL | | | PURPLE K DRY CHEMICAL | | | ABC DRY CHEMICAL | | | PURPLE K DRY CHEMICAL | | |
|------------------------------------|--------------------------------------|----------|----------|----------------------|---------|--------|-----------------------|-------|---------|------------------|------------|------------|-----------------------|--------|---------|
| PERFORMANCE | FAST FLOW | | | | | | COMPLIANCE FLOW | | | | | | | | |
| VALVE TYPE | CHROME PLATED BRASS WITH GAUGE GUARD | | | | | | | | | | | | | | |
| DESIGN | HOSE & NOZZLE | | | | | | | | | | | | | | |
| MODEL NUMBER | 594 | 581 | 567 | 582 | 568 | 595 | 580 | 584 | 569 | 592 | 564 | 589 | 599 | 566 | 591 |
| UL & ULC RATING | 2A:40B:C | 4A:40B:C | 4A:40B:C | 40B:C | 40B:C | 40B:C | 40B:C | 20B:C | 40B:C | 4A:80B:C | 10A:120B:C | 10A:160B:C | 80B:C | 120B:C | 160B:C |
| CAPACITY (LBS./KG) | 13.2/6 | 20/9 | 30/13.6 | 20/9 | 30/13.6 | 13.2/6 | 20/9 | 20/9 | 30/13.6 | 13.2/6 | 20/9 | 30/13.6 | 13.2/6 | 20/9 | 30/13.6 |
| SHIPPING WT. (LBS.) | 31 | 42.5 | 58 | 42.5 | 58 | 31 | 42.5 | 42.5 | 58 | 31 | 42.5 | 58 | 31 | 42.5 | 58 |
| HEIGHT (IN.) | 17.5 | 24.75 | 26.5 | 24.75 | 26.5 | 17.5 | 24.75 | 24.75 | 26.5 | 17.5 | 24.75 | 26.5 | 17.5 | 24.75 | 26.5 |
| WIDTH (IN.) | 10.5 | 10.5 | 11 | 10.5 | 11 | 10.5 | 10.5 | 10.5 | 11 | 10.5 | 10.5 | 11 | 10.5 | 10.5 | 11 |
| DEPTH (IN.) | 7 | 7 | 8 | 7 | 8 | 7 | 7 | 7 | 8 | 7 | 7 | 8 | 7 | 7 | 8 |
| RANGE (INITIAL- FT) | 40-50 | | | 40-50 | | | 40-50 | | | 40-50 | | | 40-50 | | |
| DISCHARGE TIME (SEC.) | 15 | 18 | 21 | 15 | 17 | 15 | 15 | 10 | 16 | 22 | 30 | 34 | 22 | 29 | 34 |
| AVERAGE DISCHARGE RATE (LBS./SEC.) | .94 | 1.20 | 1.60 | 1.40 | 1.76 | .94 | 1.44 | 2.00 | 1.88 | .59 | .65 | .95 | .61 | .67 | .81 |
| INCLUDED BRACKET | WALL | | | WALL | | | WALL | | | WALL | | | WALL | | |

Manufactured and Tested to ANSI/UL Standards
Complies with NFPA 10 Standard
ISO-9001 / ISO-14001 Certified
UL LISTED

CONFORMS TO TEST STANDARDS:

CAN/ULC-S504 - ANSI/UL299 &
CAN/ULC-S508 - ANSI/UL711

MADE IN U.S.A.



Amerex Corporation

RUGGED

- 6 Year Warranty
- Stored Pressure Design
- Dependable Drawn Steel Cylinders
- Durable High Gloss Polyester Powder Paint
- All Metal Valve Construction
- Twice the Flow Rate of Standard Models
- Meets DOT Requirements
- Temperature Range -65°F to 120°F

USER FRIENDLY

- Easy and More Economical to Maintain and Service
- Large Loop Stainless Steel Pull Pin
- Bar Coded and Bi-lingual Labels

OPTION

- USCG Approved with Bracket Listed on UL Label
- ABC, Regular, or Purple K Chemical



MODELS (10 LB)

720
721
722

MODELS (20 LB)

760
761
762



HIGH FLOW portable fire extinguishers for applications where discharge rates exceeding one pound per second are required as specified in NFPA 10. These extinguishers utilize the same hardware and are manufactured to the same U.L. specifications as Amerex compliance rated products.

HIGH FLOW - Exceeds 1 lb. per second discharge rate

| AGENT TYPE | ABC | ABC | REGULAR | REGULAR | PURPLE K | PURPLE K |
|----------------------------|----------------|----------|---------------|---------|---------------|----------|
| MODEL NUMBER | 720 | 760 | 721 | 761 | 722 | 762 |
| CAPACITY (LBS.) | 10 | 20 | 10 | 20 | 10 | 20 |
| APPLICATION | HOSE & NOZZLE | | HOSE & NOZZLE | | HOSE & NOZZLE | |
| U/L RATING | 1A:20B:C | 4A:60B:C | 20B:C | 60B:C | 20B:C | 60B:C |
| SHIPPING WEIGHT (LBS.) | 19 | 39 | 19 | 39 | 19 | 39 |
| DISCHARGE TIME (SEC.) | 10 | 19 | 10 | 20 | 11 | 20 |
| DISCHARGE RATE (LBS./SEC.) | 1.22 | 1.14 | 1.15 | 1.13 | 1.15 | 1.08 |
| DISCHARGE RANGE (FT.) | 15-25 | 15-25 | 15-25 | 15-25 | 15-25 | 15-25 |
| HEIGHT (IN.) | 20½ | 24 | 20½ | 24 | 20½ | 24 |
| WIDTH (IN.) | 8¾ | 10¼ | 8¾ | 10¼ | 8¾ | 10¼ |
| DEPTH (IN.) | 5 | 7 | 5 | 7 | 5 | 7 |
| TEMPERATURE RANGE (°F) | -65°F to 120°F | | | | | |
| INCLUDED BRACKET | WALL | | WALL | | WALL | |

Manufactured and Tested to ANSI/UL Standards
Complies with NFPA 10 Standard
ISO-9001 / ISO-14001 Certified
UL LISTED

CONFORMS TO TEST STANDARDS:

CAN/ULC-S504 - ANSI/UL299 &
CAN/ULC-S508 - ANSI/UL711

WATER & FOAM CHARGES

Charge 502, 8 oz. bottle AFFF – Model 250 & 254
 Charge 504, 38½ oz. bottle FFFP – Model 252
 Charge 506, 10 lb. carton Loaded Stream/Anti-Freeze – Model 240
 Charge 506, 55 gal. drum Loaded Stream/Anti-Freeze - Model 240
 Charge 534, 2 gal. pail FFFP – Model 630 & 631 Wheeled



WET CHEMICAL CHARGES

Charge 530-2, two 6 liter bottles – Model B260
 Charge 660-2, two 2½ gal. bottles – Model B262



WATER MIST CHARGES

Charge 670-2, two 1¾ gal. bottles – Model B270NM
 Charge 671-2, two 2½ gal. bottles – Model B272NM



HALOTRON™ I CHARGES

Charge 890, 35 lb. cylinder
 Charge 891, 80 lb. cylinder
 Charge 892, 200 lb. cylinder



CLASS D DRY POWDER CHARGES

Charge 543, 35 lb. pail Graphite (G-Plus)
 Charge 532, 300 lb. drum Graphite (G-Plus)
 [Graphite applied to a metal fire using scoop or shovel]
 Charge 557, 30 lb. pail Sodium Chloride (Super D) – Model B570 & 680
 Charge 545, 50 lb. pail Sodium Chloride (Super D) – Model B570 & 680
 [Sodium Chloride (Super D) may also be dispensed by a scoop or shovel]
 Charge 548, 50 lb. pail Copper (Navy 125S) – Model B571 & 681



ABC DRY CHEMICAL CHARGES

Charge 552, 25 lb. pail
 Charge 550, 50 lb. pail
 Charge 555, 50 lb. pail – Model B402
 Charge 540, 40 lb. carton
 Charge 540-4, four 10 lb. bags in 40 lb. carton
 Charge 509, 400 lb. drum



REGULAR DRY CHEMICAL CHARGES

Charge 512, 50 lb. pail
 Charge 541, 40 lb. carton
 Charge 541-4, four 10 lb. bags in 40 lb. carton
 Charge 511, 400 lb. drum




PURPLE K DRY CHEMICAL CHARGES

Charge 553, 25 lb. pail
 Charge 515, 50 lb. pail
 Charge 542, 40 lb. carton
 Charge 542-4, four 10 lb. bags in 40 lb. carton
 Charge 517, 400 lb. drum




Wall Hanger Brackets




Bracket Adapters



10 lb. Wall Strap Type

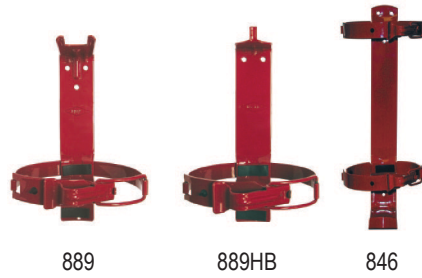

Vehicle / Marine / Aviation Brackets

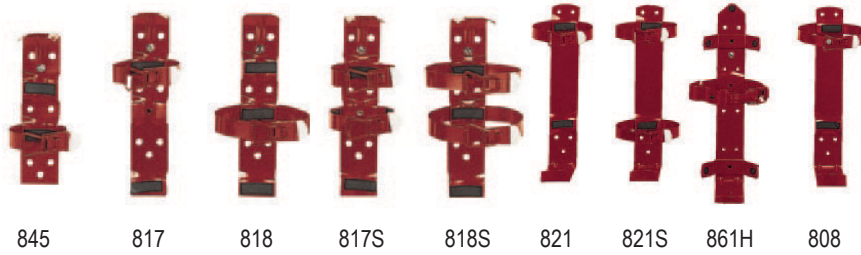


**Heavy Duty Box Type Vehicle Brackets
(Red Brackets are Galvanized)**




Heavy Duty Dolly Cart



Heavy Duty Rubber Strap Brackets



**"I" Beam Brackets
Exterior & Interior**



| AGENT TYPE | SIZE (CAPACITY) | MODEL | CYL. DIA. (INCH) | INCLUDED BRACKET | USCG BRACKET | OPTIONAL BRACKETS | RUBBER STRAP BRACKETS | 859 DOLLY OPTION |
|---|------------------|------------------------------|------------------|---------------------|----------------|----------------------------|-----------------------|------------------|
| WATER | 2.5 GAL. | 240 | 7 | 01007 WALL | N/A | 810 | 864 | YES |
| WATER MIST | 1.75 GAL. | B270NM | 7 | 14315 WALL | N/A | 810NM | N/A | |
| | 2.5 GAL. | B272NM | 7 | 14135 WALL | N/A | 810NM | N/A | |
| AFFFOAM | 6 LITER | 254 | 7 | 01007 WALL | N/A | 810 | 864 | |
| | 2.5 GAL. | 250 | 7 | 01007 WALL | N/A | 810 | 864 | YES |
| FFFOAM | 2.5 GAL. | 252 | 7 | 01007 WALL | N/A | 810 | 864 | YES |
| WET CHEMICAL | 6 LITER | B260 | 7 | 01007 WALL | 810 | 810 | N/A | |
| | 2.5 GAL. | B262 | 7 | 01007 WALL | 810 | 810 | N/A | YES |
| | 6 LITER | B260CG | 7 | 01007 WALL | 810CG | N/A | N/A | |
| | 2.5 GAL. | B262CG | 7 | 01007 WALL | 810CG | N/A | N/A | |
| HALOTRON® I | 1.4 LB. | A384T | 2.88 | 845 VEHICLE | N/A | N/A | N/A | |
| | 2.5 LB. | B385TS | 4.25 | 817S AIRCRAFT | N/A | 817S | 860 | |
| | 5 LB. | B386T | 4.25 | 818 V/MARINE | 818, 821, 861H | 818S, 821, 821S, 807 | 860 | |
| | 5.5 LB. | B394TS | 4.25 | 818S AIRCRAFT | N/A | N/A | N/A | |
| | 11 LB. | 397 | 6 | 00575 WALL | 812 | 812 | N/A | |
| | 15.5 LB. | 398 | 6 | 00575 WALL | 812 | 812 | N/A | |
| HALON 1211 | 1.25 LB. | A344T | 2.88 | 845 VEHICLE | N/A | N/A | N/A | |
| | 2.5 LB. | C352TS | 3 | 817S AIRCRAFT | N/A | N/A | 860 | |
| | 3 LB. | C354TS | 3 | 817S AIRCRAFT | N/A | N/A | 860 | |
| | 5 LB. | B355T | 4.25 | 818 V/MARINE | 818, 821, 861H | 818S, 821, 821S, 807 | 860 | |
| | 9 LB. | B369 | 5 | 00546 WALL | 808, 809 | 808, 809, 889HB | 862 | |
| | 13 LB. | B371 | 5 | 01007 WALL | 809 | 846, 809, 889HB | 862 | |
| ABC DRY CHEMICAL | 17 LB. | 361 | 7 | 00577 WALL | 810 | 810 | 864 | YES |
| | 2.5 LB. | B417 / B417T | 3 | 4834 WALL / 817 VM | 817 | 817S | 860 | |
| | 5 LB. | B402 / B402T | 4.25 | 16591 WALL / 818 VM | 818, 821, 861H | 818S, 821, 821S, 807 | 862 | |
| | 5 LB. | B500 / B500T | 4.25 | 16591 WALL / 818 VM | 818, 821, 861H | 818S, 821, 821S, 807 | 862 | |
| | 5 LB. | B424 | 4.25 | 16591 WALL | 821, 861H | 821, 821S, 807 | 862 | |
| | 6 LB. | B443 | 5 | 05525 WALL | 808, 809, 895 | 808, 809, 889, 895 | 862 | |
| | 6 LB. | B461 | 5 | 00546 WALL | 808, 809, 895 | 808, 809, 889, 895 | 862 | |
| | 10 LB. | B456 | 5 | 00546 WALL | 808, 809, 895 | 808, 809, 889, 889HB, 895 | 862 | |
| | 10 LB. | B441 | 5 | 01007 WALL | 809, 895 | 808, 809, 889HB, 895 | 862 | |
| | 20 LB. | A411 | 7 | 00577 WALL | 810 | 810 | 864 | YES |
| REGULAR DRY CHEMICAL | 20 LB. | 423 | 7 | 00577 WALL | 810 | 810 | 864 | YES |
| | 1 LB. | A620T | 2.88 | 845 VEHICLE | N/A | N/A | N/A | |
| | 2.5 LB. | B403 / B403T | 3 | 4834 WALL / 817 VM | 817 | 817S | 860 | |
| | 5 LB. | B409T | 4.25 | 818 V/MARINE | 818, 821, 861H | 807, 818, 821, 861H | 862 | |
| | 5.5 LB. | B453 | 4.25 | 16591 WALL | 818, 821, 861H | 807, 818, 821, 861H | 862 | |
| | 6 LB. | B462 | 5 | 00546 WALL | 808, 809, 895 | 808, 809, 889HB, 895 | 862 | |
| | 10 LB. | B447 | 5 | 01007 WALL | 809, 895 | 809, 846, 889HB, 895 | 862 | |
| | 10 LB. | B457 | 5 | 00546 WALL | 809, 895 | 809, 846, 889HB, 895 | 862 | |
| | 20 LB. | A412 | 7 | 00577 WALL | 810 | 810 | 864 | YES |
| | 20 LB. | 408 | 7 | 00577 WALL | 810 | 810 | 864 | YES |
| PURPLE K DRY CHEMICAL | 2.5 LB. | B410T | 3 | 817 V/MARINE | 817 | 817S | 860 | |
| | 5 LB. | B479 / B479T | 4.25 | 16591 WALL / 818 VM | 818, 821, 861H | 807, 818S, 821, 821S, 861H | 860 | |
| | 10 LB. | B460 | 5 | 01007 WALL | 809, 895 | 809, 846, 889HB | 862 | |
| | 20 LB. | A413 | 7 | 00577 WALL | 810 | 810 | 864 | YES |
| | 20 LB. | 415 | 7 | 00577 WALL | 810 | 810 | 864 | YES |
| CARBON DIOXIDE | 5 LB. | 322 | 5.25 | 00546 WALL | 809 | 809 | 862 | |
| | 5 LB. | 322NM | 5.25 | 17737 WALL | N/A | N/A | N/A | |
| | 10 LB. | 330 | 7 | 00575 WALL | 810 | 810 | N/A | |
| | 15 LB. | 331 | 7 | 00575 WALL | 810 | 810 | 864 | YES |
| | 20 LB. | 332 | 8 | 00577 WALL | 811 | 811 | 864 | YES |
| HIGH PERFORMANCE DRY CHEMICAL <i>FAST FLOW AND COMPLIANCE FLOW</i> | 13.2 LB. (6 KG) | 594, 592, 595, 599 | 7 | 09582 WALL | 810 & 810G | 810 & 810G | N/A | |
| | 20 LB. (9 KG) | 581, 582, 580, 584, 564, 566 | 7 | 09852 WALL | 810 & 810G | 810 & 810G | 864 & 874 | YES |
| | 30 LB. (13.6 KG) | 567, 568, 569, 589, 591 | 7 | 09581 WALL | 811 & 811G | 811 & 811G | 864 | YES |
| HIGH FLOW EXTINGUISHERS | 10 LB. | 720, 721, 722 | 5 | 01007 WALL | 809, 895 | 808, 809, 889HB, 895 | 862 | |
| | 20 LB. | 760, 761, 762 | 7 | 00577 WALL | 810 | 810 | 864 | YES |
| CLASS D DRY POWDER | 30 LB. | B570 | 8 | 00577 WALL | N/A | 811 | 864 | YES |
| | 30 LB. | B571 | 8 | 00577 WALL | N/A | 811 | 864 | YES |

All Amerex brackets are quality made and manufactured of steel with a powder coated paint. The paint finish assures many years of use and meets the latest UL salt spray requirements (240 hrs. @ 20% salt solution - ASTM B117).

Wheeled Extinguishers

The largest variety of QUALITY wheeled fire extinguishers available anywhere. All available in a Stationary configuration (except 50 lb. Carbon Dioxide). See Amerex "Wheeled Fire Extinguishers" brochure for more details.

DRY CHEMICAL STORED PRESSURE



Models 495, 496, 497
50 lb. Dry Chemical



Models 573, 574, 575, 690
HIGH PERFORMANCE
125 / 250 lb. Dry Chemical



Models 488, 489, 490
125/150 lb. Dry Chemical

DRY CHEMICAL NITROGEN CYLINDER OPERATED



Models 450, 451, 452
125/150 lb. Dry Chemical



Models 467, 468, 469
125/150 lb. Dry Chemical



Models 470, 471, 472
125/150 lb. Dry Chemical



Models 491, 492, 493
300/350 lb. Dry Chemical

CLASS D



Model 680 150 lb.
Sodium Chloride
Model 681 250 lb. Copper

FOAM



Model 630
33 gal. FFFP Foam

CARBON DIOXIDE



Model 333
50 lb. Carbon Dioxide
Model 334
100 lb. Carbon Dioxide

HALOTRON™ I



Models 673, 674, 675
65 lb. / 150 lb.
Halotron™ I

Amerex Fire Suppression Systems


Vehicle Fire Suppression Systems:

Amerex Vehicle Fire Suppression Systems may make it easier to obtain insurance and also help you qualify for lower premiums. As the costs of heavy duty vehicles increase, insurance rates escalate accordingly. Many insurance companies have recognized a reduction in claims paid out due to the presence of a fixed vehicle fire suppression system. The Amerex Fire Suppression System will lower your fire risk, which can lower your insurance premiums. The key phrase is "material change of risk." Ask your insurance agent.



AMGADS III:

Amerex Mobile Gas Detection System - (3rd Generation) gas monitoring system is a pre-engineered system designed to be utilized on any type of alternatively fueled vehicle. The system can be installed by the vehicle OEM or retrofitted. Its advanced technology can detect: Compressed Natural Gas (CNG), Liquefied Natural Gas (LNG), Propane (LPG), Hydrogen and any other hydrocarbon fuel vapors.



SMALL BUS SYSTEM:

The Amerex Small Vehicle System (SMVS) is designed specifically for applications involving front engine vehicles such as Para-Transit, Airport Shuttle buses and other small front engine vehicles. The SMVS kit includes all hardware and components required for a complete turn-key Automatic Fire Suppression System. The electronics portion of the system is made up of a Vehicle Operator Display with Manual Release Push Button, a wiring Interface Module, and two Solid State Heat Detectors. The system is continuously supervised by the system panel which can detect and actuate the system even when the vehicle is not in use.



KP RESTAURANT SYSTEM:



The Amerex KP Restaurant System is a pre-engineered, wet chemical, stored-pressure type with a fixed nozzle agent distribution network. The system is listed by Underwriter's Laboratories, Inc., ULC and tested to U.L. Standard 300. The system shall be designed, installed and maintained in accordance with: Amerex Part No. 20150 "Design, Installation and Maintenance Manual", N.F.P.A. 96, N.F.P.A. 17A, local codes and ordinances by an Authorized Amerex KP Systems Distributor using factory trained personnel.

ZONE DEFENSE RESTAURANT SYSTEM:

The Zone Defense Restaurant Fire Suppression System is a pre-engineered, wet chemical, stored-pressure type with a fixed nozzle agent distribution network manufactured by Amerex Corporation. The system is listed by Underwriter's Laboratories, Inc., ULC and tested to UL Standard 300. The system shall be designed, installed and maintained in accordance with: Amerex Part No. 20150 "Design, Installation and Maintenance Manual", N.F.P.A. 96, N.F.P.A. 17A, local codes and ordinances by an Authorized Amerex Zone Defense Systems Distributor using factory trained personnel. The Zone Defense system is fully self-contained and does not require electrical power or connection to either domestic water supply or fire sprinkler supply lines.



AUTOMATIC INDUSTRIAL DRY CHEMICAL SYSTEM:



The Amerex "IS" system uses our exclusive ABC (Model 555) dry chemical. ABC dry chemical suppresses more fire, by volume, than any other agent, has quick flame "knock-down" and can help to secure Class A fires against re-ignition. Since many hazards involve a variety of fuel sources, our ABC dry chemical, with protection against Class A (wood, paper, pulp), Class B (flammable liquids) and Class C (live electrical equipment) is the agent that is best suited for most Industrial hazards.



PRE-ENGINEERED CLEAN AGENT SYSTEM:



Utilizing an industry recognized fire suppression agent FM-200® or NOVEC 1230™, Amerex has developed an affordable pre-engineered clean agent fire suppression system to protect areas with sensitive electrical equipment and valuable data. The modular design incorporates pre-assembled wiring harnesses and keyed locking connectors on all electrical components to assist you in a simple and confident installation. Agent tanks are available in two sizes having a diameter of 10 inches making tank location in confined spaces easier. The Amerex CPS is monitored by an electrical control panel that has a battery back-up for 24 hour protection during power failure. Photoelectric smoke detectors are used for detection and are cross zoned to reduce the potential for unwanted system discharge. A bell and horn/strobe device alarm when fire conditions are present. All electrical circuits are supervised and factory terminated.



PLEASE SEE INDIVIDUAL SYSTEMS BROCHURES FOR MORE INFORMATION
AVAILABLE TO AUTHORIZED DISTRIBUTORS AND FACTORY TRAINED PERSONNEL



Amerex Corporation

7595 Gadsden Hwy. • P.O. Box 81
Trussville, AL 35173
Ph: (205) 655-3271
Fax: 1-800-654-5980
Int'l Fax: (205) 655-0584

www.amerex-fire.com
sales@amerex-fire.com



ISO 9001 - Quality
ISO 14001 - Environmental
OHSAS 18001 - Safety
CERTIFIED FIRM

For more information please contact:

Amerex Corporation makes every attempt possible to provide the most current and updated information. Information contained within this brochure is deemed to be as accurate as possible as of the printing date. Routine changes to products, codes and standards, and warranties subsequent to this printing will supersede printed information. Please contact Amerex Corporation for any revisions, updates, or product changes.