# STI BEAM SMOKE DAMAGE STOPPER®







STI-9706

#### PRODUCT OVERVIEW

Five models are offered to protect the vital sensor units of projected beam type smoke detectors in large areas (such as gymnasiums, warehouses and auditoriums). STI Beam Smoke Damage Stoppers are designed to protect both transmitter and receiver sensors. Installation is simple with anchors and screws provided.

#### BACKED BY A THREE YEAR GUARANTEE

As all STI protective covers, Beam Smoke Damage Stoppers are backed by a three year guarantee against breakage in normal use. They are constructed of 9-gauge, welded steel wire coated with a tough, corrosion resistant polyester shell.

### **KEY FEATURES**

#### **General Information**

- · Protection against misalignment and false fire alarms.
- · For use in controlled environment (not intended for outdoor use).
- Three year guarantee against breakage in normal use.

#### Design

 Designed to protect both transmitter and receiver units (sold individually).

#### Construction

- Super tough construction of
  9-gauge coated steel wire makes
  guards extremely difficult to break.
- · Coated with a tough, corrosion resistant polyester shell.

#### Installation

- · Fast and easy installation.
- May be painted once prior to installation.

#### Options

· Five sizes available.



## STI Beam Smoke Damage Stopper®

Dimensions and Technical Information

#### MODELS AVAILABLE

STI-9623 Beam Smoke Damage Stopper for DS240 & DS241 Beam Smoke Damage Stopper for Fireray 50/100 R STI-9624 STI-9625 Beam Smoke Damage Stopper for System Sensor

Beam Smoke Detector 6424

STI-9706 Beam Smoke Damage Stopper - flush mount for

System Sensor 1224

STI-9707 Beam Smoke Damage Stopper - surface mount

STI-9845 Smoke Detector Damage Stopper® STI-9846 Smoke Detector Damage Stopper

KIT-82 Tamper resistant stainless steel screws, #8 x 1 1/2


in. snake eye

KIT-19038 5/16 in. hex drive tamper bit for tamper resistant

screws

MODEL	HEIGHT	WIDTH	DEPTH
STI-9623	7.75 in. (196mm)	6 in. (152mm)	6 in. (152mm)
STI-9624	8.875 in. (225mm)	5.5 in. (140mm)	4.75 in. (120mm)
STI-9625	7.875 in. (200mm)	10.25 in. (260mm)	12.625 in. (321mm)
STI-9706	10.82 in. (275mm)	9.32 in. (237mm)	4 in. (120mm)
STI-9707	11 in. (280mm)	9.62 in. (244mm)	5.5 in. (140mm)
STI-9845	6.57 in. (167mm)	9.2 in. (234 mm)	4.1 in. (104 mm)
STI-9846	7.6 in. (193mm)	11.6 in. (295mm)	5.6 in. (141mm)

NOTE: No tamper resistant stainless steel screws available for STI-9625.

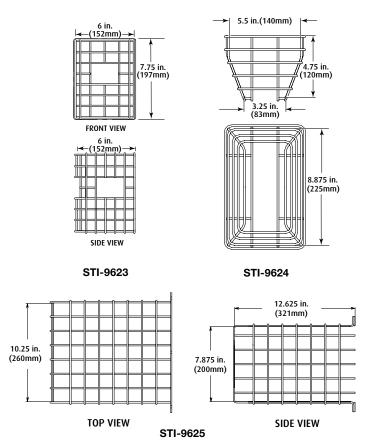


#### APPROVALS AND WARRANTY


STI-9625 has been tested and approved or listed by:


· UL, cUL Listed S3504 for use with System Sensor beam detector

#### WARRANTY

Three year guarantee against breakage in normal use.

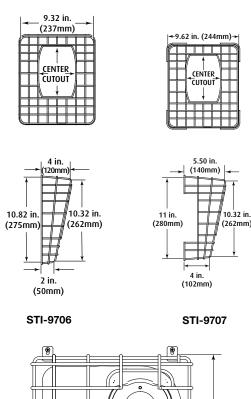





**Safety Technology** International