

Replacement Lockset for TX3-TOUCH-S15B-WR and TX3-TOUCH-S15S-WR

Follow these instructions to install RPL-LK-WR replacement lockset.

A. Remove the old lock

The lockset consists of 5 parts: lock, gaskets, washer, and nut.

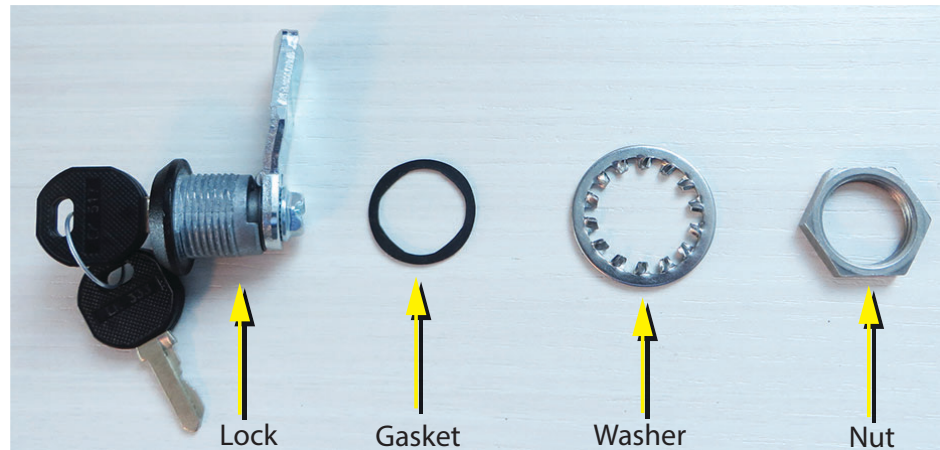


Figure 1 Parts of the lockset

1. Unscrew the old nut and remove the old lock, nut, washer, and gasket.
2. Insert the new lock in the hole in the door and secure with the new washer and nut.
3. Make sure that the gasket is on the outside.

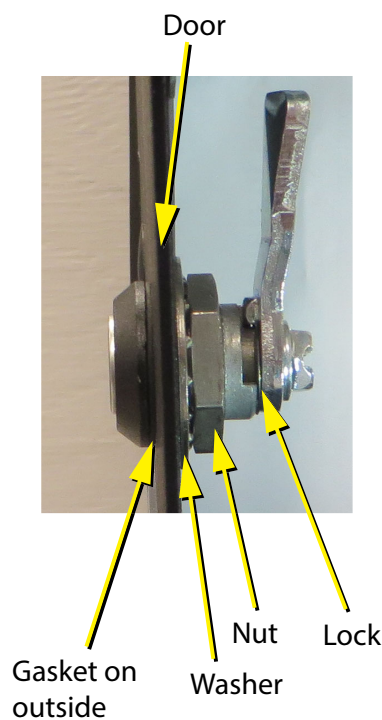


Figure 2 Lockset

4. Close and lock the door.
When the lock is in locked position, the keyhole is horizontal.



Keyhole is horizontal
when locked

Figure 3 Keyhole is horizontal when locked

You are done! If you need more help, call us at 1-888-660-4655.