

Weather Baffle for PointWatch Eclipse


DESCRIPTION

Weather baffles for the PIRECL PointWatch Eclipse are available in two different calibration gas entry versions:

The Internally Threaded model uses a 1/16 inch NPT internally threaded calibration gas opening, enabling the user to install a threaded compression fitting (not supplied) into the baffle for use with plastic or metal tubing. See Figure 1.

The Externally Threaded model uses an external 7/16-20 threaded calibration gas opening, and is a replacement for the weather baffle used in the PIRECL sample draw cup assembly p/n 007378-001.

These special weather baffles are identical in all other respects to the factory installed weather baffles provided on all standard PIRECL Pointwatch Eclipse models.

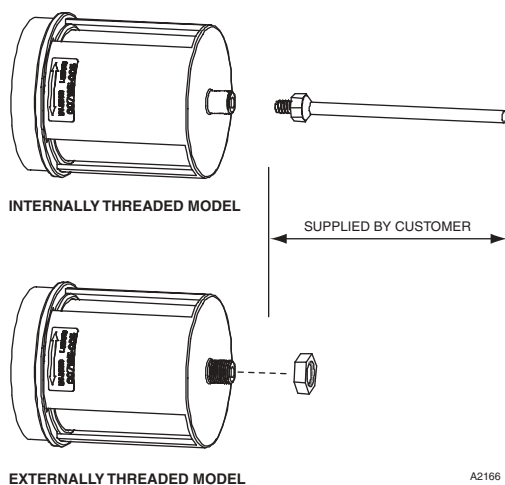

PART NUMBERS

Part Number	Description
007165-004	Internally threaded weather baffle with hydrophobic filter.
007165-003	Internally threaded weather baffle without hydrophobic filter.
007165-005	Externally threaded weather baffle with hydrophobic filter.

Figure 1—Weather Baffle Options

Detector Electronics Corporation

6901 West 110th Street • Minneapolis, Minnesota 55438 • Operator (952) 941-5665 or (800) 765-FIRE
Customer Service (952) 946-6491 • Fax (952) 829-8750 • www.detronics.com • E-mail: detronics@detronics.com