


CURRENT TRANSFORMER

CT-100A2-333

Enclosed Self-Powered Split Core 100 Amp Current Transformer with 333 mV Output

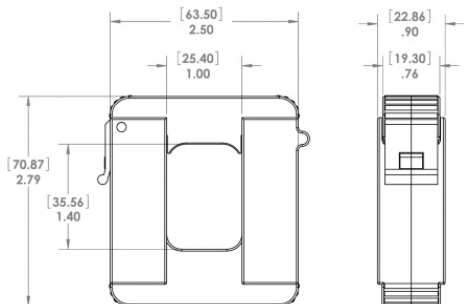

SPECIFICATIONS

Environment: Indoor Use Only
5 to 176° F (-15 to 80°C)
90% relative humidity
Wires: 6', 18 AWG
600V Rated

Primary Input (A): 100A max. AC 50/60 Hz
Secondary Output (V): 0.333 Vac
Accuracy: 0.75% (typical)
Linearity: 10%-120%
Polarity: White-Hi, Black-Low

Frequency Range: 40-400 Hz
Max Sense Voltage: 600 Vac
Approvals: ETL Listed, CE, RoHS
Ratio: 100A/0.333V
Alternate ratios available for large orders