
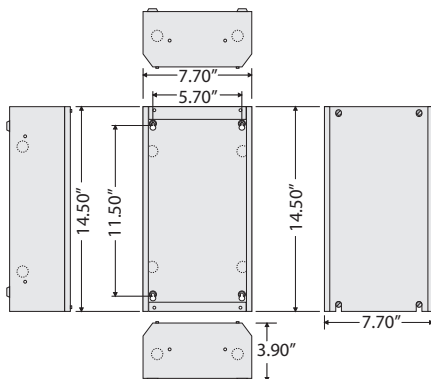


AC POWER SUPPLY

CTRL-PS

40 VA Power Supply, 120 to 24 Vac, DIN rail and 14.5"x 7.7"x 3.9" Enclosure

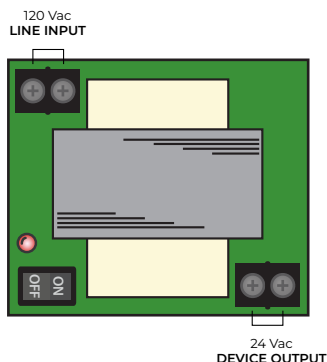

Shown
With
Cover



SPECIFICATIONS

Transformer: One 40 VA
Primary: 120 Vac
Secondary: 24 Vac, isolated
Frequency: 50/60 Hz
Overload Protection: Inherently Limited
Status: LED On = Activated
ON/OFF Switch: 2 Position
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Approvals: Class 2 (UL Approved UL5085-3),
UL916, C-UL, CE, RoHS (PSMN40AS)
UL916, C-UL, CE, RoHS (MH1000 Series)
Dimensions: 14.50" D x 7.70" W x 3.90" D
Origin: Made of US and non-US parts
Housing: NEMA 1 Metal Enclosure with screw cover

GREAT FOR ZONE & NETWORK CONTROLLERS

Notes:

Track mounted power supply may be ordered separately as model PSMN40AS.

40 VA power supply mounted in MT212-4 track, high/low voltage barrier and 8.75" of 35 mm top hat DIN rail for mounting of desired controller in one metal enclosure.

Controller must be 9.50" x 6.75" x 3.50" or smaller with DIN rail mounting capability, or 9.50" x 6.75" x 3.125" without DIN rail mounting capability.

Controller not included.