


AC POWER SUPPLIES

PSH100A SERIES

Single 100 VA Power Supply, 120 Vac to 24 Vac, UL Class 2, Metal Enclosure

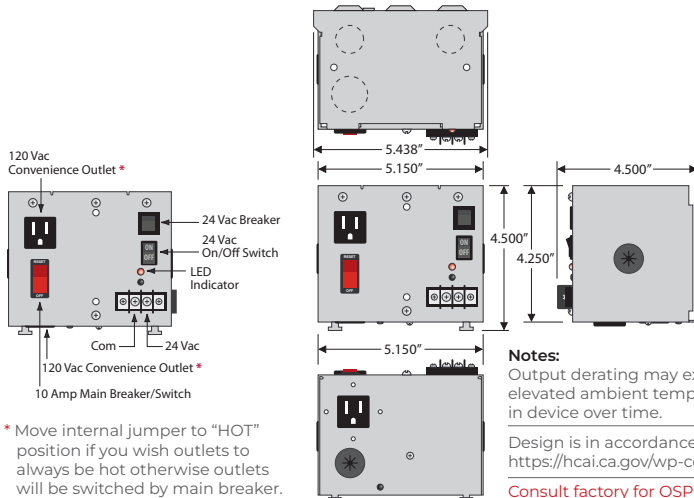

PSH100A SERIES				
Model #	120 Vac Outlets	Auxiliary Output Wire	Main Breaker On Input Power	Secondary Configuration
PSH100A	•			External Terminal Strip
PSH100AW	•			Internal Wires
PSH100AB10	•	•	10 Amp Switch / Breaker	External Terminal Strip
PSH100AWB10	•	•	10 Amp Switch / Breaker	Internal Wires

SPECIFICATIONS

Transformer: One 100 VA Split-Bobbin
Over Current Protection: Circuit Breaker
Frequency: 50/60 Hz
24 Vac ON/OFF: On / Off Switch & Breaker
Main Breaker ON/OFF: Switch / Breaker (10 Amp)
(Kills power to entire unit: Outlets, Aux. Output, & Transformer)*
Total Combined Output 9A
Max. Ambient Temperature: 40° C
Approvals: Class 2 (UL Approved UL5085-3), UL916, UL508, C-UL, CE, RoHS, Special
^Δ **Seismic Certification of Equipment and Components: OSP-0201-10**
Dimensions: 4.500" H x 5.438" W x 4.500" D
Origin: Made of US and non-US parts

Input Wires: "B10" Models Only
Input Power Wires
BLK: 120 Vac
WHT: Neutral
GRN: Ground

Outlet Wires
BLK: 120 Vac
WHT: Neutral
GRN: Ground

Output Wires: "B10" Models Only
Auxiliary Output
BLU: 120 Vac

All Other Models
Primary Wires
BLK: 120 Vac
WHT: Common

"W" Models Only
Transformer Output
WHT/YEL: 24 Vac
WHT/BLU: Common