


30 AMP TRACK MOUNT CONTROL RELAYS


RIBM24ZL

Power Relay, 30 Amp DPST-N/O,
 24 Vac/dc Coil, 4.00" Track Mount

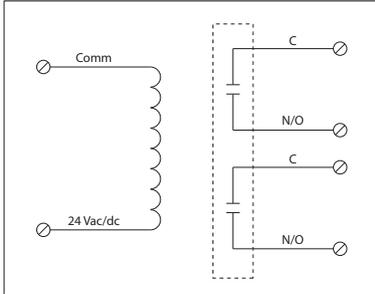

RIBMN24ZL

Power Relay, 30 Amp DPST-N/O,
 24 Vac/dc Coil, 2.75" Track Mount

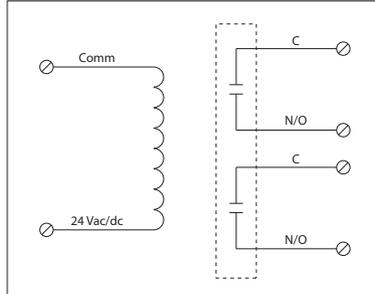

SPECIFICATIONS

- # Relays & Contact Type: One (1) DPST Continuous Duty Coil
- Expected Relay Life: 10 million cycles minimum mechanical
- Operating Temperature: -30 to 140° F
- Humidity Range: 5 to 95% (noncondensing)
- Operate Time: 18ms
- Relay Status: LED On = Activated
- Dimensions: 2.50"H x 4.00"W x 2.25"D1/2.75"D2 (RIBM24ZL)
 2.50"H x 2.75"W x 2.25"D1/2.75"D2 (RIBMN24ZL)
- Housing Detail: See **Housing H** in housing guide for dimensions
- Track Mount: 4.000" (RIBM24ZL) or 2.750" (RIBMN24ZL)
Mounting Track Sold Separately
- Origin: Made of US and non-US parts
- Approvals: UL Listed, UL916, UL864, C-UL
 California State Fire Marshal, CE, RoHS
- Gold Flash: Yes
- Override Switch: No

- Contact Ratings:
- 30 Amp Resistive @ 300 Vac
- 25 Amp Resistive @ 28 Vdc
- 15 Amp Resistive @ 600 Vac
- 3 HP @ 480-600 Vac
- 2 HP @ 240/277 Vac
- 1 HP @ 120 Vac
- 20 Amp Ballast @ 277-480 Vac
- Not rated for Electronic Ballast
- 770 VA Pilot Duty @ 120 Vac
- 1,158 VA Pilot Duty @ 240 Vac
- 1,109 VA Pilot Duty @ 277 Vac
- 1,640 VA Pilot Duty @ 480 Vac
- Heavy Pilot Duty @ 600 Vac

- Coil Current:
- 110 mA @ 20 Vac
- 138 mA @ 24 Vac
- 55 mA @ 20 Vdc
- 55 mA @ 24 Vdc
- 77 mA @ 30 Vdc

- Coil Voltage Input:
- 24 Vac/dc ; 50-60 Hz
- Drop Out = 2.1 Vac / 3.8 Vdc
- Pull In = 18 Vac / 22 Vdc

- Notes:
- Order Normally Closed by adding "NC" to end of model number