


AC CURRENT SWITCH

RIBXJA

Current Switch, Split Ring Remote, Adjustable, 3-150 Amp

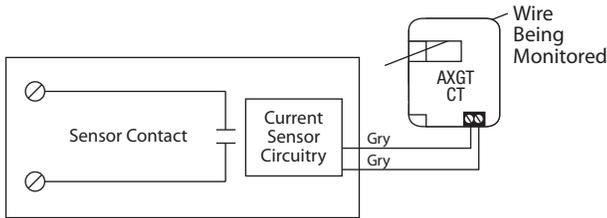

SPECIFICATIONS

Operating Temperature: -30 to 140° F

Humidity Range: 5 to 95% (noncondensing)

Dimensions: 4.00"H x 4.00"W x 1.81"D with 0.50" NPT nipple

Housing Detail: See **Housing C** in housing guide for dimensions

Origin: Made of US and non-US parts

Wire Length: 16", 600V Rated

Approvals: UL Listed, UL916, C-UL, CE, RoHS
 UL Accepted for Use in Plenum, NEMA 1

Housing Rating: External, with contact status

Sensor Type: Adjustable, 3-150 Amps

Sensor Threshold: 3-150 Amps

Sensor Range: 600 Vac

Max Sense Voltage: Current below threshold: Open / LED OFF

Sensor Contact Status: Current above threshold: Closed / LED ON

Sensor Contact:

- Solid State Contact
- 30 Vac/dc, .4 Amp Max.
- When sensor contact is off (open), leakage <30 uA @ 30Vac/dc

- When sensor contact is on (closed), voltage drop < .3 Vac/dc @ .1 Amp < 1.6 Vac/dc @ .4 Amp