


AC CURRENT SWITCH

RIBXJF

Current Switch, Split Ring Remote, Fixed, 3-150 Amp

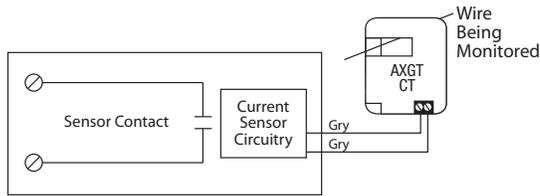

SPECIFICATIONS

Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Dimensions: 4.00"H x 4.00"W x 1.81"D with 0.50" NPT nipple
Housing Detail: See **Housing C** in housing guide for dimensions
Origin: Made of US and non-US parts
Remote Dimensions: (Outside) 2.52" x 2.00", (Inside) .52" x .52"
Wire Length: 16", 600V Rated
Approvals: UL Listed, UL916, C-UL, CE, RoHS
Housing Rating: UL Accepted for Use in Plenum, NEMA 1
Sensor Type: External, with contact status

Sensor Threshold: Fixed, 3 Amps
Sensor Range: 3-150 Amps
Max Sense Voltage: 600 Vac
Sensor Contact Status: Current below threshold: Open / LED OFF
 Current above threshold: Closed / LED ON

Sensor Contact:

- Solid State Contact
- 30 Vac/dc, .4 Amp Max.
- When sensor contact is off (open), leakage <30 uA @ 30Vac/dc
- When sensor contact is on (closed), voltage drop < .3 Vac/dc @ .1 Amp < 1.6 Vac/dc @ .4 Amp