
Gas Temperature Controls (FVIR Related)

Gas Temperature Controls: FVIR **NEW Part** Part Gas **Image** Description Manufacturer Number Number Type 3-1/2" manifold pressure setting, Pilot pressure D 9004703105 100110026 fixed w/ECO cut off at 195°F. Temperature White Rodgers® Natural range to 160°F. (A=1.25") 3-1/2" manifold pressure setting, Pilot pressure D 9004353105 100109812 fixed w/ECO cut off at 195°F; Temperature White Rodgers® Natural range to 160°F. (A=2.5") 4" manifold pressure setting, Pilot pressure 9004028205 100109674 fixed w/ECO cut off at 195°F; Temperature D White Rodgers® Natural range 160°F. (A=1.25") 4" manifold pressure setting, Pilot pressure D 9003739005 100109446 fixed w/ECO cut off at 195°F; Temperature White Rodgers® Natural range to 160°F. (A=2.5") 4" manifold pressure setting, Pilot pressure NI* 9003407005 100109217 fixed w/ECO cut off at 195°F; Temperature White Rodgers® Natural range 160°F. (A=1.25") 4" manifold pressure setting, Pilot pressure NI* 9003638005 100109365 fixed w/ECO cut off at 195°F; Temperature White Rodgers® Natural range 160°F. (A=2.5") 10" manifold pressure setting, Pilot pressure fixed w/ECO cut off at 195°F; Temperature Ε 9004713105 100110038 White Rodgers® Propane range 160°F. RIGHT HAND THREAD Burner Tube Connection (A=1.25") 10" manifold pressure setting, Pilot pressure fixed w/ECO cut off at 195°F; Temperature Ε 9003408005 100109219 White Rodgers® Propane range 160°F. LEFT HAND THREAD Burner Tube Connection (A=1.25") 10" manifold pressure setting, Pilot pressure fixed w/ECO cut off at 195°F; Temperature NI* 9003639005 100109367 White Rodgers® Propane range to 160°F. LEFT HAND THREAD Burner Tube Connection (A=2.5") 10" manifold pressure setting, Pilot pressure fixed w/ECO cut off at 195°F; Temperature NI* 9003656005 100109372 White Rodgers® Propane range 160°F, LEFT HAND THREAD Burner Tube Connection (A=2.5") 10" manifold pressure setting, Pilot pressure fixed w/ECO cut off at 195°F; Temperature NI* 9009076005 100233299 White Rodgers® Propane range to 160°F. LEFT HAND THREAD Burner Tube Connection (A=2.5")

*NI: Not Illustrated

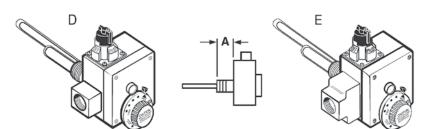

FEATURES & BENEFITS

- Safe lighting features permits lighting without danger of main gas flow
- 100% gas shutoff if needed