

NVR

/128CH NVR

16MP/12MP/8MP/6MP/4MP/3MP/1080P/720P HD NVR



ED98128H5NV-A3H































8K Output HD IPC

DDNS

Network

Audio

MIC

Mobile

CMS

Mouse

E-mail

This seires of products supports 64/128CH 16MP/12MP /8MP / 6MP / 5MP / 4MP / 3MP /

 $1080P / 1280 \times 1024 / 960P / 720P$ high definition IP video input, which adopts the advanced

SOC technique to ensure high definition recording in each channel and realize outstanding robustness of the system.

This seires supports 64/128 CH IP input, simultaneous 16 CH playback, and 8K high definition


display. So it can meet different security requirements of home, financial, commerce, enterprise,

transportation and government, etc.

Features

- Support 64/128CH 16MP/12MP/8MP/6MP/5MP/4MP/3MP/1080P/1280x1024/960P/720P/960H/D1/CIF IP input
- H.265S/H.265+/H.265/H.264 coding
- Intuitive and user-friendly Graphic User Interface (GUI), Windows style operation by mouse
- Multi-mode recording: manual / timed / motion / sensor/ POS / AI recording
- Playback: 16 CH simultaneous playback
- Search: time slice, time, event, tag, smart and target database search •
- Support face detection and comparison
- Support multiple VCA (Video Content Analytics) events, such as region intrusion, tripwire, etc. .
- Support OS information overlay on live view and playback
- . Support RAID 0, 1, 5, 6, 10
- Express and flexible backup via USB, network and so on
- Preview, record, playback, backup and remote access are supported
- DHCP, DDNS, PPPoE network protocol, etc.
- Compatible with third-party IPCs, such as ONVIF, Hikvision, etc.
- Remote control via Web Client or CMS: preview, playback, backup, PTZ and configuration
- Multi-user online simultaneously
- Authorization management, log view and device status view
- 8K output, true high resolution display
- Support PTZ preset and auto cruise, up to 255 presets and 8 cruises •
- Support NAT function and QR Code scanning by mobile phones
- Powerful mobile surveillance by smart phones with iOS and Android OS

Dimensions

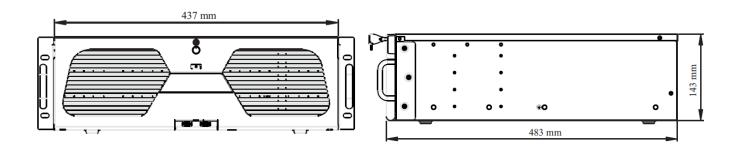

Specifications

	Model	TD-33128H16-A3H		
System	os	Embedded Linux		
Video	IP Video Input		128CH	
	Network Bandwidth		Incoming: 768Mbps Outgoing: 768Mbps	
	Resolution	16MP/12MP/8MP/6MP/5MP/4MP/3MP/1080P/128	:0x1024/960P/720P/960H/D1/CIF	
	Output	HDMI1: 7680×4320@60, 7680×4320@30, 3840×2160@60, 3840×2160@30, 1920×1080, 1280×1024, 1024×768 (When the resolution of HDMI1output is 8K, HDMI2 is unavailable and the maximum resolution of HDMI3 output is 1920×1080) HDMI2: 3840×2160@60, 3840×2160@30, 1920×1080, 1280×1024, 1024×768 HDMI3: 3840×2160@60, 3840×2160@30, 1920×1080, 1280×1024, 1024×768 HDMI4: 1920×1080, 1280×1024, 1024×768 VGA×1: 1920×1080, 1280×1024, 1024×768 (VGA and HDMI1 output the same video source)		
	Multi-screen Display	Main output: 1/4/6/8/9/13/16/25/32/36/64 AUX output 1:1/4/6/8/9/13/16/25/32/36 AUX output2: 1/4/6/8/9/13/16 AUX output 3:1/4/6/8/9/13/16 Max. 132(64+36+16+16)		
	Compression	H.264/H.265/H.265S		
	Network input		128CH	
	Local Input	RCA ×I (for two-way talk)		
Audio	Local Output	RCA×I		
	HDMI Audio Output	Support		
	Compression	G.711(U/A)		
Record	Resolution	16MP/12MP/8MP/6MP/5MP/4MP/3MP/1080P/1280x1024/960P/720P/960H/D1/CIF		
	Frame Rate	N:30fps; P:25fps		
Playback	Simultaneous Playback	16CH		
	Search	Time slice/time/event/tag/smart search		
	Function	Play, pause, FF, Rewind, digital zoom, previous frame, next frame, etc.		
Decoding Capability	Live View	1CH 16MP@30 / 4 CH 12MP(only available for main output)		
	Playback	1CH 16MP@30 / 4CH 8MP(only available for main output)		
	Mode	Manual, sensor, motion, exception, smart events, etc.		
Alarm	Input	24CH		
	Output	8CH		
	Triggering	Record, snapshot, preset, e-mail, etc.		
	Face Detection Performance (AI by IPC)		128CH	
	Face Detection Performance (AI by Device)	4CH(4MP)		
	Face Match Performance	16CH		
Face	Comparison Capability	36 pictures/second		
1 400	Face Picture Database	32 libraries 10000 face pictures		
	Face Picture Search	Search by picture is supported		
	Database Management	Add, modify, delete and search face pictures		
	Face Picture Adding	Add face pictures through APP, WEB and external import		
	Face Picture Comparison	Supports successful face recognition alarm and stranger match alarm		

	Statistical Graph		
	of Information	Bar graph	
	Statistical Mode of Information	Statistics by day, week, month, quarter as well as customized time period	
Perimeter Protection	Human/Vehicle Classification (AI by IPC)	128CH	
	Human/Vehicle Classification (AI by Device)	8CH(2MP)	
Video Metadata	Human/Vehicle Attribute Analysis (AI by IPC)	Yes	
Other Functions	Fisheye	Supports fisheye dewarping via NVR/Web Client/mobile APP	
	Plate Recognition (AI by IPC)	Yes	
Network	Protocol	TCP/IP, HTTP, HTTPS, 802.1x, FTP, DHCP, DDNS, RTP, RTSP, RTCP, NTP, UPnP, SMTP, IPv6, UDP, WebSocket, PPPoE, SNMP, IGMP	
	Interface	RJ45 10/100/1000Mbps ×2	
	Client Connection	Max. 128 users access	
Mobile Device	os	iOS, Andriod	
	HDD Interface	SATA×16, max 10TB per HDD	
Storage	RAID Type	RAID0,1,5,6,10	
	E-SATA Interface	2	
	USB	USB3.0×1; USB2.0 ×3(Front:2);	
	RS485	Yes (full-duplex), connect to PTZ or keyboard	
Port	RS232	Yes	
	Reset	Yes	
	Remote Controller	No	
	Power	ATX-275W	
	Consumption	≤50W (without HDD)	
Others	Dimensions	437 ×483 ×143mm	
	Certificate	CE,FCC	
	Environmental Protection	Directive EU RoHS, WEEE(2012/19/EU), Directive 94/62/EC and REACH(EC1907/2006)	
	Working Environment	-10~50°C; Humidity: 10%~90%	

Rear Panel

