

2 MEGAPIXEL HD CAMERA

ENS

FEATURES





- High performance CMOS image sensor, megapixel definition.
- HD video, coaxial cable to transmit the control signal.
- Support 75-3 coaxial cable transmission without any loss.
Transmission distance is over 350 m.
- High speed, long distance real-time transmission.
- Support ICR switch to realize surveillance both in the daytime and at night.
- Support auto exposure, auto white balance, auto electronic shutter and auto gain function.
- Support DC12V power supplying.
- IP66 compliance.
- Support CVI TVI CVBS AHD video output, switch is simple and fast.




SPECIFICATIONS

Signal System	NTSC
Resolution	Digital:1080 (30p)
Image Sensor	1/2.9" CMOS (IMX323)
Total Pixels	1956(H)x1266(V) Approx. 2.47M pixels
Effective Pixels	1944(H)x1092(V) Approx. 2.12M Pixels
Shutter Speed	AUTO/MANUAL (1/50~1/30000 sec)
Min.illumination	Color:0.1lux.BW:0.5lux. Color DSS:0.017lux.BW DSS:0.0008lux
Max.IR LEDs Lenght	70-100m
Day/Night	Auto/Color/B&W/EXTERN
Noise Reduction	Off/Low/Middle/High
Lens Focal length	5-50mm
Power Supply	DC12V±10%
S/N Ratio	More than 50Db (AGC off)
Power Consumption	800mA
Working Environment	-30°C~+60°C
AGC	0-20 steps
Ingress Protection	IP66
Dimensions(WxDxH)	347mm (L) x102mm (W) x96mm (H)
Working temperature	-10°C~+45°C
Video Output	1.HD (1080P).2.CVBS
Brightness	0-20
ACE/DWDR	WDR
MONITOR	0/1/2/3
Menu	YES
White Balance	Auto/Auto ext/Preset/Manual
Digital Zoom	1.0x-8.0x
Defog	Off/On
Privacy Mask	16Masks
Mirror	Off/On
Transmission Distance	Over 350m via 75-3 coaxial cable
IR LED	Super Led 10 IR
Weight	0.83kg

DIMENSION

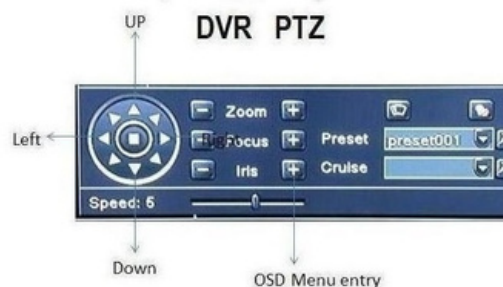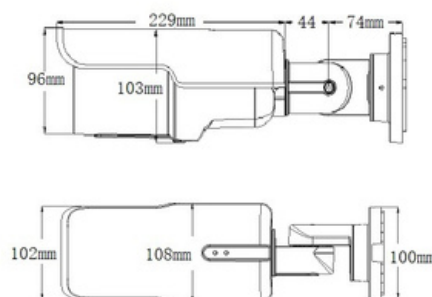

MENU

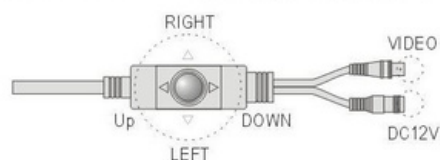

Video switching mode

- 1.Go in the menu,click on the system.
- 2.Choose output,switch TVI/AHD/CVI/CVBS
- 3.Factory default TVI output