

# HDC-VPD8AE1/28

8MP HD Analog IR Dome Camera




- 8MP@15fps/5MP@20fps/4mp@30fps image, high resolution, true color
- AHD / TVI / CVI / CVBS standard and lossless video output
- Up to 1700 TVL resolution
- CMOS progressive scan, perfectly capture the moving object
- Support OSD menu
- High speed, long distance and real time transmission
- Auto color to B/W at low illumination
- Support ICR switch, true day/night, WDR
- Support noise reduction function
- 10~20m IR night view distance
- IP66 & IK10 ingress protection
- Support COC
- Support 960H CVBS output



## SPECIFICATIONS

Model	HDC-VPD8AE1/28
<b>Specifications</b>	
<b>Camera</b>	
Image Sensor	1 / 2.5 "CMOS
Resolution	8MP
Image Size	3840x2160
Video Output	AHD / TVI / CVI / CVBS
Image System	PAL / NTSC
Electronic Shutter	Auto
IR Distance	10 ~ 20 m
Frame Rate	15fps
Min. Illumination	Color : 0.01 lux@F1.2, AGC ON; B/W : 0 lux with IR
Lens	3.6 mm ( 2.8 mm optional )
Lens Mount	M12
S / N Ratio	≥52dB ( AGC OFF )
Ingress Protection	IP 67 & IK10
<b>Functions</b>	
Function Control	OSD ( COC Control )
Day & Night	ICR
Digital WDR	No
3D NR	Yes
AGC	No
Auto White Balance	Yes
BLC	Yes
Defog	No
LSC	No
Saturation	Yes
Sharpness	Yes
Contrast	Yes
Smart IR	Yes
Image Setting	Yes
Defect Correction	Auto
Language	11 languages
Angle Adjustment	Pan: 0°~355°; Tilt: 0°~67°; Rotation: 0°~355°
<b>Others</b>	
Power Supply	DC12V ( ± 10% )
Power Consumption	IR OFF : < 2W; IR ON : < 4W
Working Environment	- 30 °C ~ 50 °C, 10 % ~ 90 % ( relative humidity )
Dimensions ( mm )	Φ 119 x 87.8
Weight ( net )	Approx. 0.59KG

## DIMENSIONS

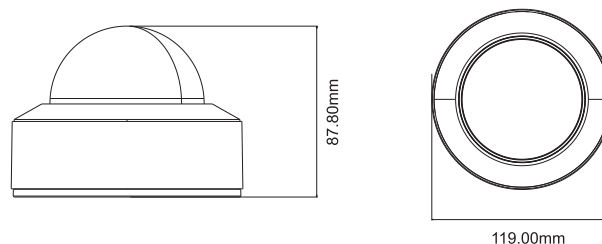

## AVAILABLE ACCESSORIES

