



Safety Switch



341-BT GuardSwitch

Applications

- Requiring Highly Defeat Resistant Switches
- Meets ANSI, Semi S2 & European Safety Standard for the Highest Machine Risk Category 4 when used with the INT Safety Relay
- Washdown Environments
- Packaging Machinery
- Pharmaceutical Equipment
- Semiconductor Equipment
- Food Processing Machinery

General Specifications

Enclosure	Kynar® Polyvinylidene Fluoride with sonic welded lid
Temperature Range	14°F to 150°F (-10°C to 65°C)
Environmental	Hermetically Sealed Contact Switch Encapsulated in Polyurethane
NEMA Rating	1, 2, 4, 4X, 5, 12, 12K, 13
Protection Class	IP 67
Response Time (individual circuits)	1 msec The two circuits do not switch simultaneously and depend on the speed of the guard closure. A delay less than 50 msec is typical.
Life Cycles	100,000 Under Full Load; Up to 200,000,000 Under Dry Circuit
Lead Types/O.D.	18/4 SJTOW (K) / 0.34" (0.86cm) 22/4 PVC Jacketed (J) / 0.19" (0.48cm) 22/6 PVC Jacketed (J) / 0.21" (0.53cm)
UL/CSA/TUV	All Models

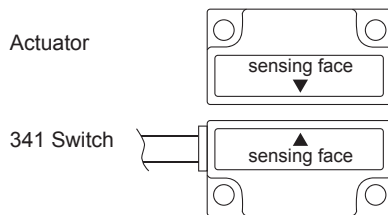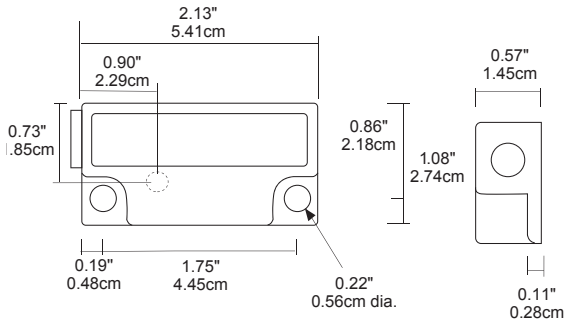

File E 122942



LR89176



U9880128199005
When used with INT
Safety Monitor Relay



Electrical Specifications (Applies to all models)

Circuit No.	Circuit Type	Contact Configuration	Load Rating	MAX Switching Voltage	MAX Switching Current
1	Switch	N.O.	10W/VA	48VAC/VDC	0.2A
2	Tamper	N.C.	10W/VA	48VAC/VDC	0.2A
2	w/optional LED	N.C.	0.1–1.4W	48VDC(3V drop)	30mA
3	Monitor	N.O.	10W/VA	48VAC/VDC	0.2A

Order Information

Part Number	Contact ¹ Configuration	Sense Range ² Minimum	Sense Range ² Maximum	Break ² Range	Lead Length
341-BT-06K	DPST: 1 N.O., 1 N.C.	0.12"(0.3cm)	0.38"(1.0cm)	0.75"(1.9cm)	6' (1.8m)
341-BT-12(J)OR(K)	DPST: 1 N.O., 1 N.C.	0.12"(0.3cm)	0.38"(1.0cm)	0.75"(1.9cm)	12' (3.6m)
341-BLT-12K	DPST: 1 N.O., 1 N.C. w/ LED	0.12"(0.3cm)	0.38"(1.0cm)	0.75"(1.9cm)	12' (3.6m)
341-B3T-12J	TPST: 2 N.O., 1 N.C.	0.12"(0.3cm)	0.38"(1.0cm)	0.75"(1.9cm)	12' (3.6m)
341-B3LT-12J	TPST: 2 N.O., 1 N.C. w/LED	0.12"(0.3cm)	0.38"(1.0cm)	0.75"(1.9cm)	12' (3.6m)

Warning— Each electrical rating is an individual maximum and cannot be exceeded!

¹ Configuration with actuator away from the switch

² Proximity of ferrous materials usually reduces sense range — typically by 50%. The shape and type of material cause a wide diversity of effects. Testing is required to determine actual sense range for specific applications.