

Bells
Single Stroke
330EX Series

Edwards 330EX Series single stroke bells produce a clearly defined note for timing, scheduling, paging and general alarm applications. Coded, intermittent current may be used to cause the striker to gong, pause and strike again for any specified period of time. Designed for use in hazardous locations, they have a NEMA Type 4 housing.

Features and Specifications

- Single stroke or coded intermittent stroke
- Completely assembled
- Sealing fitting for 3/4" (19mm) conduit and wire leads for power connections
- Mounts directly on surface
- Self-compensating solenoid plunger
- Low power drain for efficient operation over long wire runs
- Available with 6" or 10" gongs
- Corrosion resistant heat flowed epoxy finish
- Suitable for use in outdoor applications
- NEMA Type 4 housing
- UL Listed for Class I, Divisions 1 and 2, Groups B, C & D; Class II, Divisions 1 and 2, Groups E, F & G; and Class III



Ordering Information					
Description	Cat. No.	Operating Voltage ¹	Current ²	Gong Size	dB at 1m/10ft.
AC Single Stroke	332EX-6N5	120V AC	0.43 A	6" (152mm)	96/86
	332EX-10N5	120V AC	0.43 A	10" (254mm)	104/94
	332EX-6R5	240V AC	0.20 A	6" (152mm)	96/86
	332EX-10R5	240V AC	0.20 A	10" (254mm)	104/94
DC Single Stroke	333EX-6G1	24V DC	3.50 A	6" (152mm)	96/86
	333EX-10G1	24V DC	3.50 A	10" (254mm)	104/94
	333EX-6P1	125V DC	0.52 A	6" (152mm)	96/86

¹AC voltage frequency is 50/60 Hz.
²Single pulse duration - 8 to 16 milliseconds



AC



DC



96-104 dB



UL



EX-PROOF



HAZ-LOC




4
ENCLOSURE

Bells

Single Stroke

330EX Series

Weights and Dimensions						
Cat. No.	Approx. Net Weight (lb.)	Approx. Shipping Weight (lb.)	Gong Size	Dimensions		
				A	B	C
332EX-6N5	5.70	7.50	6" (152mm)	4 1/16" (103mm)	4 13/16" (122mm)	5/8" (16mm)
332EX-6R5	5.70	7.50	6" (152mm)	4 1/16" (103mm)	4 13/16" (122mm)	5/8" (16mm)
332EX-10N5	8.54	9.78	10" (254mm)	6 1/16" (154mm)	5 3/8" (137mm)	2 5/8" (67mm)
332EX-10R5	8.54	9.78	10" (254mm)	6 1/16" (154mm)	5 3/8" (137mm)	2 5/8" (67mm)
333EX-6G1	5.70	7.50	6" (152mm)	4 1/16" (103mm)	4 13/16" (122mm)	5/8" (16mm)
333EX-6P1	5.70	7.50	6" (152mm)	4 1/16" (103mm)	4 13/16" (122mm)	5/8" (16mm)
333EX-10G1	8.54	9.78	10" (254mm)	6 1/16" (154mm)	5 3/8" (137mm)	2 5/8" (67mm)

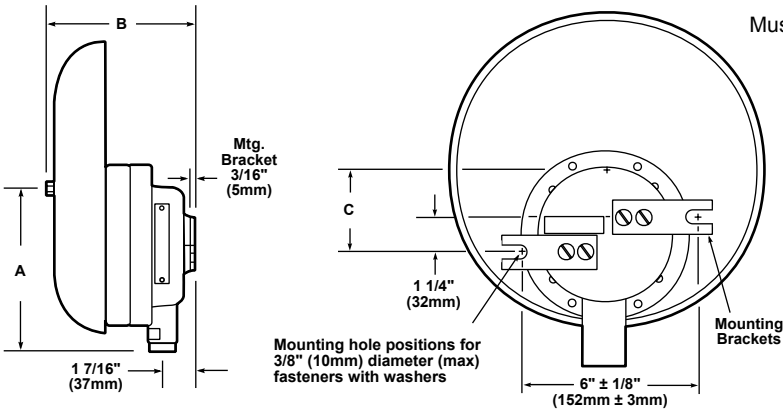

Must be mounted vertically.