

# Beacons

## Flashing LED

### Sonos Series

The Sonos Series LED beacon features connections made to the base during the initial wiring phase which results in faster and more reliable installation. The beacon head 'twists and clicks' into the base on commissioning, avoiding the wiring and connection problems associated with traditional alarm devices.

Deep base units have an IP65 rating and are suitable for use in indoor and outdoor applications. The Sonos Beacon utilizes a full faced, translucent case which provides a large lens area and a greater spread of light.

Sonos Beacon units have a deep or shallow red color base as standard and are available with a red or amber lens.

### Features and Specifications

- LED light source
- High efficiency LED beacon consumes less than 5mA
- IP65 rated (deep base); IP21 rated (shallow base)
- Flame resistant polycarbonate construction
- Operating temperature range: -13°F to 158°F (-25°C to 70°C)



3.84"




### Ordering Information

| Description  | Edwards Cat. No. | Klaxon Cat. No. | Operating Voltage | Current | Base         | Lens Color |
|--------------|------------------|-----------------|-------------------|---------|--------------|------------|
| Flashing LED | 18-980507        | PSB-0009        | 17-60V DC         | 0.005 A | Red; shallow | Red        |
|              | 18-980510        | PSB-0026        | 17-60V DC         | 0.005 A | Red; shallow | Amber      |
|              | 18-980508        | PSB-0017        | 17-60V DC         | 0.005 A | Red; deep    | Red        |
|              | 18-980511        | PSB-0031        | 17-60V DC         | 0.005 A | Red; deep    | Amber      |

### Weights and Dimensions

| Edwards Cat. No. | Klaxon Cat. No. | Approx. Net Weight (lb.) |
|------------------|-----------------|--------------------------|
| 18-980507        | PSB-0009        | 0.49                     |
| 18-980510        | PSB-0026        | 0.49                     |
| 18-980508        | PSB-0017        | 0.55                     |
| 18-980511        | PSB-0031        | 0.55                     |

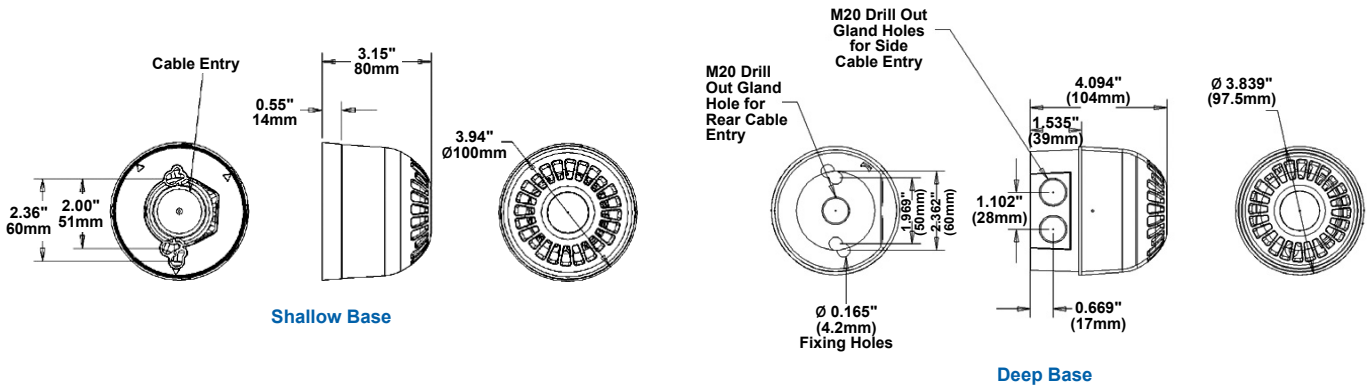

DC
 OP TEMP
 LED

IP21 ENCLOSURE
 IP65 ENCLOSURE

Shallow Base
   
 Deep Base