



Product Data Sheet

2515A-L

Heavy-duty Maxi-wide gap surface contact

Heavy duty Maxi-gap contact


The Sentrol 2515 Series contacts are ideal for installations in harsh environments where the gap distance needs to be sufficient.

Durability and dependability

The Sentrol high performance magnetic contacts have been designed to facilitate installation and ensure durability and dependability. Most are conservatively rated at 10,000,000 cycles, guaranteeing a long life. Every reed connection is hand soldered and each magnetic contact is tested before they leave the factory, 100% of the time.

High quality components and materials

Reed legs are plated with rhodium or ruthenium, and hermetically sealed in dry nitrogen. This offers superior protection against sticking and provides a moisture free environment therefore preventing corrosion.

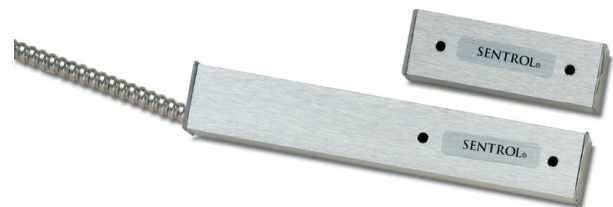

Standard Features


- Optimal Maxi-gap configuration
- Ideal for poor fitting doors
- Fewer false alarms
- Fewer service calls
- Reduced installation time
- Mounting hardware included

2515A-L

Heavy-duty Maxi-wide gap surface contact

Specifications

Gap distance (max)	152 mm
Connections	45 cm stainless steel armored cable
Contact	NC
Supervised loop	No
Dimensions (L x W x H)	
Contact	155 x 13 x 25 mm
Magnet	76 x 13 x 25 mm
Color	Aluminum

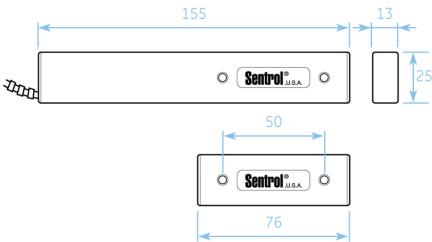

Ordering Information

Part No.	Description
2515A-L	Heavy-duty Maxi-wide gap surface contact