

D1222 Battery (12 V, 2.2 Ah)

www.boschsecurity.com



BOSCH
Invented for life





- ▶ 12 VDC sealed lead-acid
- ▶ Fully rechargeable
- ▶ Maintenance-free
- ▶ Long service life
- ▶ Appropriate for use as uninterruptible power supplies

A 12 VDC valve-regulated lead-acid rechargeable battery that withstands overcharge or over-discharge, and resists vibration and shock. The compact design saves installation space, while providing full and reliable power.

The D1222 terminals are uniquely positioned.

System overview

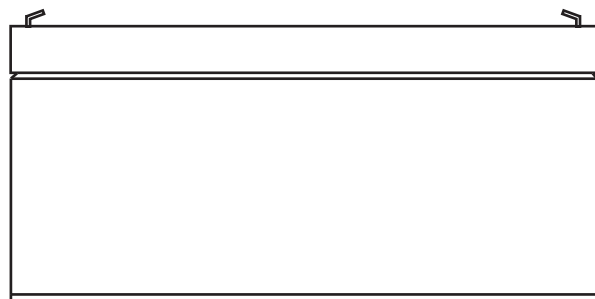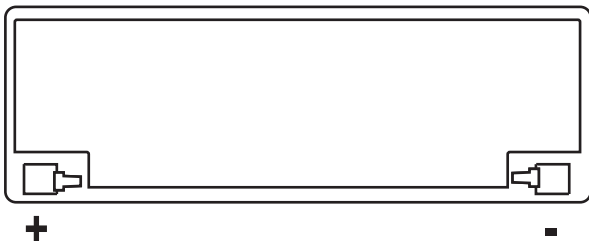

Certifications and approvals

US UL certificate MH25408

| Region | Certification |
|--------|---|
| Europe | CE Council Directive 89/336/EEC Electro-magnetic Compatibility |

Installation/configuration notes

It is recommended to use constant-voltage charging and to recharge the battery immediately after use.

Technical specifications

| | |
|---------------------------|---|
| Nominal Voltage: | 12 VDC |
| Rated Capacity: | 2.2 Ah (20 hr) |
| Internal Resistance: | 50 mΩ (20°C full charge) |
| Compatible Control Panels | VR8 Desktop Alarm System |
| Dimensions: | 178 mm x 34 mm x 60 mm (7 in. x 1.3 in. x 2.3 in.) |
| Weight: | 1.0 kg (2.2 lbs) |
| Terminal Position: | C |

| | |
|---------------------------------|--|
| Terminal Type: | Fasten Tab 187E |
| Temperature Affect on Capacity: | 40°C (104°F) = 105% 20°C (68°F) = 100% 0°C (32°F) = 85% |
| Capacity Rates: | 20 hr, 0.11 A, 2.2 Ah 10 hr, 0.19 A, 1.9 Ah 5 hr, 0.35 A, 1.75 Ah 1 hr, 1.32 A, 1.32 Ah |

Ordering information

D1222 Battery (12 V, 2.2 Ah)

A 12 VDC valve-regulated lead-acid rechargeable battery that withstands overcharge or over-discharge, and resists vibration and shock.

Order number **D1222**

Represented by:

North America:

Bosch Security Systems, Inc.
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 800 289 0096
Fax: +1 585 223 9180
security.sales@us.bosch.com
www.boschsecurity.us

Europe, Middle East, Africa:

Bosch Security Systems B.V.
P.O. Box 80002
5617 BA Eindhoven, The Netherlands
Phone: + 31 40 2577 284
Fax: +31 40 2577 330
emea.securitysystems@bosch.com
www.boschsecurity.com

Asia-Pacific:

Robert Bosch (SEA) Pte Ltd, Security Systems
11 Bishan Street 21
Singapore 573943
Phone: +65 6571 2808
Fax: +65 6571 2699
apr.securitysystems@bosch.com
www.boschsecurity.asia

China:

Bosch (Shanghai) Security Systems Ltd.
203 Building, No. 333 Fuquan Road
North IBP
Changning District, Shanghai
200335 China
Phone +86 21 22181111
Fax: +86 21 22182398
www.boschsecurity.com.cn

Latin America and Caribbean:

Robert Bosch Ltda Security Systems Division
Via Anhanguera, Km 98
CEP 13065-900
Campinas, Sao Paulo, Brazil
Phone: +55 19 2103 2860
Fax: +55 19 2103 2862
latam.boschsecurity@bosch.com
www.boschsecurity.com