


## CURRENT TRANSFORMER INTEGRATORS

### MOD SERIES

DIN Rail Mount 1, 2, and 3 phase Rogowski Coil CT Integrators

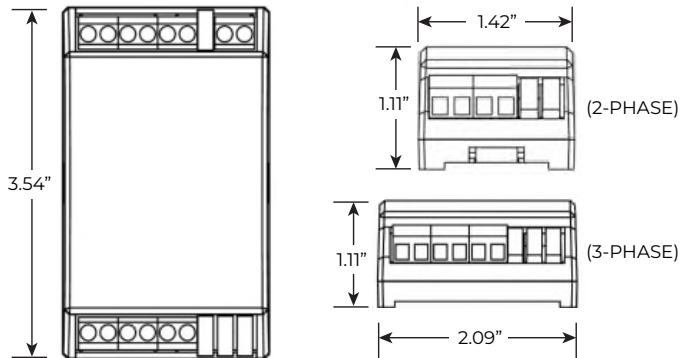

### SPECIFICATIONS - FOR USE WITH ROPE SERIES

**Environment:** Indoor Use Only  
5 to 149° F (-15 to 65°C)  
90% relative humidity

**Input:** 70mV AC 60 Hz

**Output:** 0.333Vac

**Accuracy:** 0.5% (typical)

**Linearity:** 10%-120%

**Polarity:** Red-Hi, Black-Low

**Frequency Range:** 40-400 Hz

**Power Supply Requirements:** 12 Vdc @ 1.2A or 24 Vdc @ 0.6A

**Approvals:** ETL Listed, CE, RoHS

### MOD SERIES SELECTION GUIDE

| Model #      | Phases | Ratio      | Accuracy (%) |
|--------------|--------|------------|--------------|
| MOD1-07-33MV | 1      | 70mV/333mV | 0.5          |
| MOD2-07-33MV | 2      | 70mV/333mV | 0.5          |
| MOD3-07-33MV | 3      | 70mV/333mV | 0.5          |

### APPLICATION - FOR USE WITH ROPE SERIES

