



DC POWER SUPPLY: 120 VAC TO 24 VAC AND 24 VDC

PSH100A24DWB10

DC Power Supply, 100 VA, 120 to 24 Vac and Switching 120 to 24 Vdc at 2.5 Amp, Metal Enclosure



* Move internal jumper to "HOT" position if you wish outlets to always be hot otherwise outlets will be switched by main breaker.

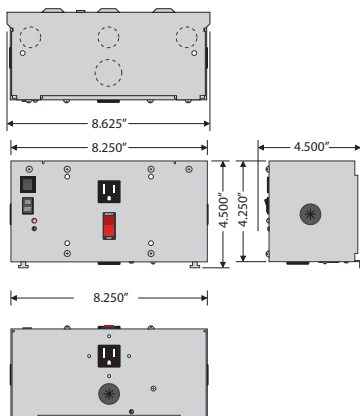

SPECIFICATIONS

Transformer: One 100 VA Split-Bobbin

Voltage Input: 120 Vac

Frequency: 50/60 Hz

Over Current Protection: Circuit Breaker

24 Vac ON/OFF: Switch / Breaker (4 Amp)

Main Breaker ON/OFF: Switch / Breaker (10 Amp)

(Kills power to entire unit: Outlets, Aux. Output, & Transformer, and 24 Vdc)*
 Total Combined Output 9A

Dimensions: 4.500" H x 8.625" W x 4.500" D

Origin: Made of US and non-US parts

Input Wires: Input Power Wires

BLK: 120 Vac

WHT: Neutral

GRN: Ground

Notes:

• This device is not certified for use as a Class 2 power source.

Output Wires: DC Supply Output

WHT/RED: 24 Vdc

WHT/BLU: 24 Vdc COM

Auxiliary Output

BLU: 120 Vac

Transformer Output

WHT/YEL: 24 Vac

WHT/BLU: 24 Vac COM